

**Mississippi
Department of Public Safety**

**Criminal
Information Center**



*MCHS Tenprint
Interface Control Document (ICD)*

Version 5.10 R09

updated

February 20, 2024

TABLE OF CONTENTS

1.0	SCOPE.....	8
2.0	REFERENCES	9
3.0	OVERVIEW OF SCANNING STATION INTERFACE WITH MCHS	10
4.0	SCANNING STATION AND INTERFACE REQUIREMENTS	12
4.1	TYPES OF AGENCIES AND TYPES OF SUBMISSIONS	12
4.2	TRANSACTION RESPONSE MESSAGES	15
4.3	ADMINISTRATIVE MESSAGES	16
5.0	SCANNING STATION CONFIGURATIONS	17
5.1	CONFIGURATION OPTIONS.....	17
5.1.1	<i>Configuration 1: Single Scanning Station</i>	<i>17</i>
5.1.2	<i>Configuration 2: Single Scanning Station with Cardscan and Livescan Scanners</i>	<i>17</i>
5.1.3	<i>Configuration 3: Concentrator with Two Scanning Stations.....</i>	<i>18</i>
6.0	IDENTIFYING MESSAGES RECEIVED FROM MCHS.....	19
7.0	PRINT RESPONSES FROM MCHS ON SCANNING STATION PRINTER REQUIREMENTS.....	21
8.0	PRINT TENPRINT AND PALM PRINT CARD AT SCANNING STATION REQUIREMENTS	22
9.0	STORE, RETRIEVE, RESUBMIT TRANSACTION ON SCANNING STATION REQUIREMENTS.....	23
10.0	SECURITY REQUIREMENTS	24
11.0	CIC CERTIFICATION REQUIREMENTS	25
12.0	APPENDIX A - CONTENT OF EACH RECORD TYPE IN A TRANSACTION	26
12.1	A.1 TYPE 1 TRANSACTION INFORMATION RECORD	26
12.2	A.2 TYPE 2 TENPRINT DATA RECORD.....	31
12.3	A.3 TYPE 4 HIGH-RESOLUTION GRAYSCALE FINGERPRINT IMAGE RECORD	43
12.4	A.4 TYPE 10 FACIAL IMAGE RECORD	47
12.5	A.5 TYPE 14 VARIABLE RESOLUTION FINGERPRINT IMAGE RECORD	59
12.6	A.6 TYPE 15 VARIABLE-RESOLUTION PALM PRINT IMAGE RECORD	62
12.7	A.7 ANNOTATIONS FOR FINGERPRINTS IN FIELD 2.084 AND FOR PALM PRINTS IN FIELD 15.018	72
13.0	APPENDIX B - ANSI_NIST TRANSACTION FORMAT	74
13.1	B.1 TAGGED TEXT RECORD FORMAT	75
13.2	B.2 TAGGED TEXT WITH BINARY RECORD FORMAT	76
13.3	B.3 BINARY RECORD FORMAT	76
13.4	B.4 IDC FIELD VALUES	76
14.0	APPENDIX C - TRANSACTIONS SENT BY A SCANNING STATION TO MCHS	77
14.1	C.1 SMTPS MAIL PROCESSING REQUIREMENTS	77
15.0	APPENDIX D - RESPONSES FROM MCHS TO A SCANNING STATION	80
15.1	D.1 POP3S MAIL PROCESSING REQUIREMENTS	80
15.2	D.3 MS SEARCH RESPONSE, PROSECUTOR AND COURT DISPOSITION FORMS, DNA DATABASE COLLECTION FORM, AND RECORD UNDER REVIEW NOTICE.....	81
15.2.1	<i>D.3.1 Blank Prosecutor and Court Disposition Forms</i>	<i>86</i>

15.3	D.4 MCHS REJECT NOTICE	89
15.4	D.5 MCHS WARNING NOTICE	92
15.5	D.6 FBI SEARCH RESPONSE AND FBI ERROR RESPONSE	93
15.6	D.7 FBI SEARCH RESPONSE AND FBI ERROR RESPONSE	99
15.6.1	<i>How to Identify an NSOR Response Email Message</i>	99
15.6.2	<i>How to Interpret the Results of an NSOR Response</i>	100
15.6.2.1	No Matches and No Candidates	100
15.6.2.2	Biometric Matches	100
15.6.2.3	Non-Biometric Candidates	100
15.7	NSOR RESPONSE FORMAT	101
15.7.1	<i>Use of Numeric 0 instead of Alphabetic O</i>	101
15.7.2	<i>Example of a No Match</i>	102
15.7.3	<i>Example of a Biometric Match</i>	103
15.7.4	<i>Example of a Non-Biometric Match Using Two Names in the Applicant Submission</i>	105
15.7.5	<i>Example of a Non-Biometric Match Where Candidates Exceed Limit</i>	108
15.7.6	<i>Example of a No-Match with Caveats</i>	110
15.8	DELAYED NSOR RESPONSE	112
15.8.1	<i>Example of a Non-Biometric Delayed NSOR Response</i>	112
16.0	APPENDIX E - ADMIN MESSAGES FROM MCHS TO A SCANNING STATION	115
16.1	E.1 EDIT TABLE DOWNLOAD MESSAGES	115
16.2	E.2 ATN BLOCK MESSAGES	119
16.3	E.1 EDIT TABLE DOWNLOAD MESSAGES	122
16.4	E.2 ATN BLOCK MESSAGES	126
17.0	APPENDIX F - ATN CHECK DIGIT ALGORITHM	129
18.0	APPENDIX G - SAMPLE TRANSACTIONS WITH TYPE 1, 2, AND 4 RECORDS	134
18.1	G.1 ARREST TRANSACTION	134
18.1.1	<i>ARR Transaction Field Contents</i>	134
18.1.2	<i>ARR Non-Binary Field Format</i>	139
18.1.3	<i>ARR MIME Email Message Format</i>	140
18.2	G.2 APPLICANT TRANSACTION	141
18.2.1	<i>APP Transaction Field Contents</i>	141
18.2.2	<i>APP Non-Binary Field Format</i>	146
18.2.3	<i>APP Email Message MIME Format</i>	147
18.3	G.3 DOC INMATE RECEIPT TRANSACTION	148
18.3.1	<i>DOC Transaction Field Contents</i>	148
18.3.2	<i>DOC Non-Binary Field Format</i>	152
18.3.3	<i>DOC MIME Email Message Format</i>	153
19.0	APPENDIX H - SAMPLE TYPE 10 AND TYPE 15 RECORDS	154
19.1	H.1 TYPE 10 FACIAL IMAGE RECORDS	154
19.1.1	<i>Type 10 Record Field Contents</i>	154
19.1.2	<i>Type 10 Record Non-Binary Field Format</i>	155
19.2	H.2 TYPE 15 PALM PRINT IMAGE RECORD	156
19.2.1	<i>Type 15 Record Field Contents</i>	156
19.2.2	<i>Type 15 Record Non-Binary Field Format</i>	159
20.0	APPENDIX I - CARD SAMPLES	160
20.1	I.1 MISSISSIPPI STATE ARREST CARD	160

20.2	I.2 FBI APPLICANT CARD	162
20.3	I.3 FBI PALM PRINT CARD FD-884	163
21.0	APPENDIX J - INSTALLATION	165
21.1	J.1 INSTALLATION CHECKLIST	165
21.2	J.2 INSTALLATION PROCEDURES	167

Change Log

Date	Version	Change
April 15, 2003	5.00	(New document)
June 20, 2003	5.01	<p>Field 1.02 Format Version Number: Value changed to "0501"</p> <p>Field 1.08 Arrest/Applicant/DOC Agency ORI: In Appendix A, for ARRs, the source of the value corrected and made consistent with other references in the document.</p> <p>Field 1.08 Arrest/Applicant/DOC Agency ORI: In Appendix A, for DOCs, the edit table was changed.</p> <p>Field 2.014 FBI #: Field deleted.</p> <p>Field 2.015 SID #: Field deleted.</p> <p>Field 2.018 Name: In Appendix A, valid character set modified.</p> <p>Field 2.020 Place of Birth: In Appendix A, edit table is changed.</p> <p>Field 2.037 Reason Fingerprinted: In Appendix A, source corrected to be consistent with Section 4.1.</p> <p>Field 2.084 Amputated and Bandaged: In Appendix A, field type and occurrences corrected and made consistent with other references in the document.</p> <p>Field 2.705 Arrest Charge Set/Citation: In Appendix A, underscore removed from edit table name.</p> <p>Field 2.706 Fee Paid: In Appendix A, Source clarified to indicate that this field applies only to Billable Applicant and No Charge Applicant Resubmit Applicant submissions.</p> <p>Transaction Samples: In Appendix G, value for finger positions 11-14 in Impression Type field and value for plain thumbs in hll field corrected.</p>
August 6, 2003	5.02	<p>Field 1.02 Format Version Number: Value changed to "0502". Updated samples in Appendix G to reflect the new version number.</p> <p>Field 1.09 Transaction Control No: Added hyphens between elements of the TCN format.</p> <p>Field 1.11 Native Scanning Res: Changed length to 5.</p> <p>Field 1.12 Nominal Transmitting Res: Changed length to 5.</p> <p>Removed requirements for Type 7 records including reference to TIFF specification, modifications to Section 4.1, A.1, and Appendix B introduction. Removed Section A.4 and renumbered A.5 to A.4.</p>

Date	Version	Change
October 6, 2003	5.02	<p>Installation checklist: Added naming conventions for station and operator ids. Added step to update Hosts table. Added step to coordinate software and data entry configuration options.</p> <p>Field 1.08 Arrest/Applicant/DOC Agency ORI length changed to Maximum 9.</p> <p>Field 1.09 Transaction Control No value description updated to include the CERT- transactions described in Section 6.</p> <p>Field 2.020 Place of Birth changed to be required for all types of transactions.</p> <p>Field 2.027 Height and Field 2.029 Weight changed to be required.</p> <p>Field 2.084 other requirements revised to allow both Amputated or Bandaged code and Type 4 image for the same finger if the scanning station is a cardscan. (Prescreening will delete the Type 4 image if both are found for the same finger.)</p> <p>Made miscellaneous wording clarifications throughout the document. Changed the term "hardcoded-default" to "pre-set default". The definition and requirement are unchanged.</p>
March 17, 2004	5.02	<p>Fields 1.07 Print Agency and 1.08 Arrest/Applicant/DOC Agency ORI Source and Value requirements clarified.</p> <p>Appendix D TCN added to Rap Sheet document samples.</p> <p>Appendix E.2 clarified to indicate that the ATN Block message applies only to livescans.</p> <p>No requirements have been changed.</p>
November 30, 2004	5.02	Correct typos.
February 25, 2005	5.02	<p>Corrected types and made miscellaneous wording clarifications.</p> <p>Resequenced the steps in the Installation Checklist in Section 5.2.</p> <p>No requirements have been changed.</p>
July 13, 2006	5.02	Increase size of Originating Agency Case Number to 20 per FBI in EFTS 7.1.
December 18, 2006	5.02	<p>Change document name "Prosecutor Intake Form" to "Prosecutor Disposition Form". Add new document "Court Disposition Form".</p> <p>Update Installation Checklist to reflect elimination of Hosts table and changes in Users table.</p> <p>Eliminate optional scanning station configuration C.</p> <p>Modify Type 4 Impression Type field requirements when a Store and Forward is used.</p> <p>Correct Enforce Agency 'Used with' in list of Edit Tables.</p> <p>Add step 18 in the Installation Checklist regarding submitting test transactions when a new station is first installed.</p>
July 11, 2008	5.02	Update document references and ATN Block Message discussion.

Date	Version	Change
October 15, 2009	5.02	Update Type 4 Image Scanning Resolution field values consistent with the ANSI/NIST standard. Add Nickname cross-field edit. Change minimum value for Date of Birth and add cross-field edits. Add basic date edits relative to current date. Miscellaneous clarifications.
November 22, 2010	5.02	Miscellaneous clarifications.
October 28, 2011	5.02	Add Type 10 for facial and SMT images to all tenprint transactions. Appendices A.4, B, D.4, and H. Add Type 15 for palm print images to all tenprint transactions. Appendices A.5, B, D.4, and H. Miscellaneous clarifications.
March 6, 2012	5.02	Add new fields to Type 10 and Type 15 per ANSI/NIST-ITL 1-2011. Not distributed.
April 9, 2012	5.02	Minor updates to new Type 10 and Type 15 fields per ANSI/NIST-ITL 1-2011. Not distributed.
June 7, 2013	5.02	Revise use of Amputated and Bandaged field in Type 2 record to be consistent with FBI EBTS specification. Add requirement to communicate with MCHS over SSL/TLS secure connection (see Appendices C and D).
January 31, 2014	5.02	Miscellaneous clarifications.
August 11, 2014	5.02	Type 2: Changed SSN validation: SSNs beginning with 9 are now allowed. Type 15: Corrected field 15.018 max occurs. Type 15: Revised to allow APP transactions for specified reasons fingerprinted.
September 2, 2014	5.02	Type 2: Changed SSN validation::SSN 123456789 is now allowed. Type 2: Changed DOB validation: DOB 13 years before Date Printed, DOA, or DOO is now allowed and must be allowed. Type 15: Writer's palm is required. Type 15: Clarification that palm positions must be captured in accordance with the FBI's "Guidelines for Capturing Palmprints and Supplementals", available on FBI biospecs.org website and that the full palm position and the upper palm position must include all fingers including the distals.
September 29, 2014	5.02	Added Sex Offender Registration (APP for OR) to Types of Agencies/ Types of Submissions table in Section 4.1and Palm Print Appendix A.5 ; add Sex Offender Reg to field 2.037 Reason Fingerprinted. Updated reference to FBI Palm Print Capture documentation.
December 5, 2014	5.02 R18	Indicated only full palms are accepted from cardscans and added instructions for printing cards of upper/lower palm pairs.
February 11, 2015	5.02 R19	Added new EBTS v. 10.0 fields to FBI Response samples.

Date	Version	Change
July 31, 2015	5.02 R20	Clarifications.
November 4, 2015	5.02 R21	Added DNA Form sample
November 18, 2016	5.02 R22	n/a
February 28, 2017	5.02 R23	<p>Clarifications. Some of the clarifications include:</p> <ul style="list-style-type: none"> Enhanced explanation of ATN Block Messages and how scanning stations are to process them in Appendix E.2, Added Record Under Review message to Section 7 and Appendix D. Enhanced explanation of requirements for recording partial amputations, full amputations, and otherwise unprintable fingerprint and palm print positions, and use of Fields 2.084 and 15.018. Enhanced explanation of messages to explain that they must be printed (and displayed) using fixed-font in order to achieve the alignment shown in the sample responses. <p>Removed SMTP and POP3 protocols. Only SMTPS and POP3S are allowed.</p> <p>Removed requirements for CIC operator-submitted transactions.</p> <p>All cross-field validations are mandatory for new certifications. Incorporated requirements that were previously documented separately:</p> <ul style="list-style-type: none"> Scanners and WSQ algorithm must be FBI-certified. Additional requirements for printing MCHS and FBI responses. (Section 8) Additional requirements for printing fingerprint and palm print card images. (Sec 9) Additional requirements for storing transactions. (Section 10) Requirement regarding VPN-IPSEC. (Section 11) Sequence of fields on cardscans to accommodate efficient data entry. (Appx A.2) Additional requirements for Edit Table Download messages. (Appendix E.1) <p>Added validation for Field 2.022 Date of Birth: Cannot be more than 99 years before Transaction Date with exception that 19000101 must be allowed.</p> <p>Modified requirement for Fields 10.004 and 15.004 Source Agency ORI must be populated with the same value as 1.07 Print Agency ORI.</p> <p>Updated Installation Checklist.</p>
March 31, 2017	5.02 R24	<p>Changed allowed characters for 2.709 DOC Number: Only alphabetic and numeric characters are allowed.</p> <p>Removed requirement to notify scanning station operator when station begins using Next ATN Block.</p> <p>Changed requirement for palm prints on cardscan: Allow either full palms or upper/lower pairs but PREFER that a cardscan support BOTH.</p>

Date	Version	Change
April 18, 2017	5.02 R25	Corrected entries in table in Sec 4.1: Reason Fingerprinted for No Charge Applicant Resubmit does not need to be the same as reason fingerprinted in original Billable Applicant transaction. (As specified in Appendix A.2.) Clarified that, for livescans, for the ORI in field 1.07 Print Agency ORI, the value is assigned to the livescan by the CIC. Changed Source options for Field 1.08 for Instate Inquiry Only APP transactions from CIC stations: Can be either user-entered or hardcoded - agency-specific. CIC will specify at time of installation.
May 9, 2017	5.02 R26	Clarified requirements for subfields of Employment and Residence fields. Clarified email To and From lines in email messages both ways between the scanning station and MCHS.
June 30, 2017	5.02 R27	Updated requirements for deleting messages from a scanning station's POP3 mail file. Vendor's software must automatically remove a scanning station's mail messages from its POP3 mail file on the server, preferably after it is retrieved, but not more than a maximum number of days specified by the CIC.
July 31, 2017	5.02 R28	Added requirement for Driver's License. It is required if reason fingerprinted is 'CDL-Hazmat'. This has been the requirement since CDL Hazmat stations were set up but was not previously documented in ICD.
August 1, 2017	5.02 R29	Clarified cross-field validation on Date of Birth for validation with Date of Offense and Arrest Type.
September 30, 2017	5.02 R30	Max size of an image in a Type 15 record increased to accommodate some large images of full palm prints.
March 30, 2018	5.02 R31	Minor wording clarifications including Section 12 and Appendix B.1.
February 15, 2019	5.02 R32	Removed CDL-HazMat related requirements for Driver's License. Minor wording clarifications.
July 1, 2019	5.02 R33	Update examples of Reject Notices. Add requirements for legacy stations using SMTP and POP3 mail processing.
September 15, 2019	5.02 R34	Revised 2.022 Date of Birth validation, for APPs, with regard to Date Printed. Changed to only apply to APP for SOR transactions. Does not apply to any other type of APP. Minor wording clarifications.
October 25, 2019	5.02 R35	Numerous clarifications.
December 31, 2019	5.02 R36	Numerous clarifications. Updated Configuration Options. Updated Installation Checklist.

Date	Version	Change
January 15, 2020	5.10 R00	Cross-field validations are mandatory. Equipment Make and Model in field 2.067 must be on the CIC's list of scanners certified by the vendor and the values in the field must use the standardized text specified by the CIC and Equipment Serial Number must be specified. For livescans and cardscans that connect to a concentrator (see Option 3 in Section 5.1.3), the requirement for Equipment Serial Number in field 2.067 has additional requirements. Type 1 record field 1.13 Domain Version must include the Edit Table Download Date in description in Hair Color Edit Table entry for ZZDoNotUse, as defined in Appendix A.1. Value in Type 1 field 1.02 Format Version must be '0510'. Messages in mail file must be deleted by the scanning station software within 7 days.
November 14, 2020	5.10 R01	Includes updates to support requirements for Type 10 records for facial images. Updated from email address for reject and warning response messages
November 4, 2021	5.10 R02	Updates for use of Type 14 with 4-4-2 Slap Impressions in Applicant transaction.
March 23, 2022	5.10 R03	Updated with new seals. Changed hair color and eye color to conform with ANSI NIST for 5.10. Added examples of confirmation responses.
August 1, 2022	5.10 R04	Updated field 2.84 AMP Codes table for finger positions. Clearly state biometrics must be captured during same session as identification information.
August 24, 2022	5.10 R04	Removed the requirement for the operator to have the option on requesting a new TCN in section 10. Old: The station operator must be given the option to send the transaction with either the same TCN or with a new TCN. New: The station operator must be given the option to send the transaction with either the same TCN. Removed section 6.0 SUBMITTING CERTIFICATION TEST TRANSACTIONS. Added Confirmation Notice Response Updated Edit Table Download requirement
February 2, 2023	5.10 R05	Removed Type-10 SMT Images as they are a future capability. Removed Facial Image SAPs which are not supported.
February 24, 2023	5.10 R06	Changed 5.10 certification dates and add clause that vendors may be required to re-certify if they fail to follow procedures in ICD 5.10 at CIC Director's discretion.
June 1, 2023	5.10 R07	Updated to include National Sex Offender Registry responses.
September 11, 2023	5.10 R08	Removed sections about legacy POP3 and SMTP access as only secure SMTPS and POP3 are allowed.

<i>Date</i>	<i>Version</i>	<i>Change</i>
February 20, 2024	5.10 R09	Moved Installation Checklist from 5.2 to new Appendix J - Installation. Added new Installation Procedures to Appendix J.

1.0 SCOPE

Refer to the January 15, 2020 entry in the change log for a summary of the 5.10 requirements.

This document provides the requirements for tenprint livescans and cardscans to interface with the Mississippi Criminal History System (MCHS).

MCHS is operated by the Mississippi Department of Public Safety Criminal Information Center (hereafter referred to as the CIC) located in Pearl, Mississippi. The CIC may be reached by telephone at (601) 933-2600.

The document is structured as follows.

- [Section 2 References](#) lists referenced documents that provide additional detail or background for the interface.
- [Section 3 Interface Overview](#) provides a high level overview of the data flows between the fingerprint scanning station and the MCHS system.
- [Section 4 Interface Requirements](#) presents detailed requirements for building and sending transactions to MCHS. It also describes the format and processing requirements of responses and administrative messages MCHS sends to a scanning station. This section refers to additional requirements in the appendices.
- [Section 5 Scanning Station Configurations](#) describes allowable options for configuring multiple scanning stations at one location and provides an installation checklist for installation of scanning stations at local agencies or the CIC.
- [Section 6 Identifying Messages](#) from MCHS provides guidance on how to identify messages sent from MCHS to the scanning station.
- [Section 7 Printing Responses](#) from MCHS on Scanning Stations describes requirements for printing all responses from MCHS on the scanning station printer.
- [Section 8 Printing Tenprint and Palm Print Card Image Requirements](#) describes the requirements for printing card images on the scanning station printer.
- [Section 9 Store, Retrieve and Resubmit Transactions](#) describes the requirements for storing and subsequently resubmitting transactions on a scanning station
- [Section 10 Security Requirements](#) identifies the security requirements.
- [Section 11 CIC Certification Requirements](#) the requirements for certification of scanning station configurations.

Sections 4 through 11 states the requirements for interfacing with MCHS and these requirements must be met in their entirety. [Section 4](#) references Appendices A through H that include requirements that must be completely met. The reference documents in [Section 2](#) provide more detail and may be referenced in the requirements sections.


2.0 REFERENCES

The following references contain requirements for MCHS.

1. Data Format for the Interchange of Fingerprint, Facial & Other Biometric Information, American National Standards Institute (ANSI/NIST-ITL 1-2011 November 2011) (referred to in this document as the 'ANSI/NIST transmission format' or 'NIST-2011').
2. JPEG File Interchange Format (JFIF), Version 1.02, September 1992, available at <http://www.jpeg.org/public/jfif.pdf>.
3. SMTP Service Extension for Secure SMTP over Transport Layer Security, Request for Comment (RFC) 3207, February 2002.
4. Updated Transport Layer Security (TLS) Server Identity Check Procedure for Email-Related Protocols, RFC 7817m March 2016.
5. Internet Message Format, RFC 2822, April 2001.
6. Post Office Protocol - Version 3, RFC 1939, May 1996.
7. Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies, RFC 2045, November 1996.
8. Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types, RFC 2046, November 1996.
9. MIME (Multipurpose Internet Mail Extensions) Part Three: Message Header Extensions for Non-ASCII Text, RFC 2047, November 1996.
10. MCHS Security Policy, version in effect at time of certification.
11. Instructions for Sample Transactions to Submit to CIC for Pre-Certification Review.
12. MCHS Tenprint Scanning Station Certification Test Procedures, version in effect at time of certification.
13. MCHS Palm Print Submission Certification Test Procedures, version in effect at time of certification.
14. MCHS Reject Notice and Warning Notice Error Messages.
15. A Practical Guide for Palm Print Capture, available on fbibiospecs.org website.
The following reference provides background information. **It does not contain requirements for transactions sent to MCHS.** The MCHS system transforms data from MCHS formats to EBTS formats as needed. **MCHS does not accept FBI EFTS or EBTS transaction data formats.**
16. Electronic Biometric Transmission Specification (EBTS), US Department of Justice (DOJ), Federal Bureau of Investigation (FBI), Criminal Justice Information Services (CJIS) Division, Version 10..0, September 30, 2017.

3.0 OVERVIEW OF SCANNING STATION INTERFACE WITH MCHS

This brief overview of the data flows provides a context for understanding the detailed interface requirements.

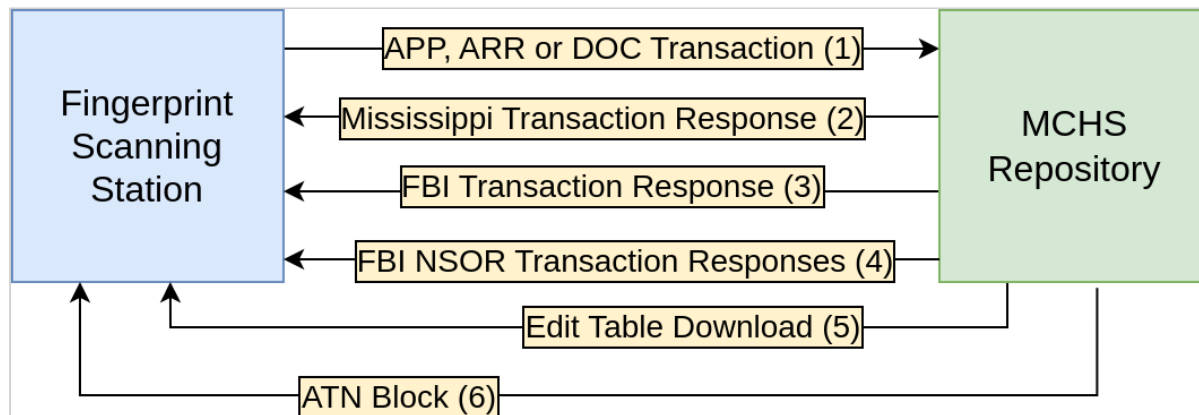

The diagram above shows the flow of information between a fingerprint scanning station (livescan or cardscan) and MCHS. The primary flow consists of a scanning station:

1. Sending applicant (APP), arrest (ARR), or Department of Corrections (DOC) tenprint transactions to MCHS
2. Receiving Mississippi Transaction Responses
3. Receiving FBI Transaction Responses
4. Receiving FBI National Sex Offender Registry (NSOR) Responses

A search request must be an APP, ARR or DOC transaction (#1 in diagram):

- An APP must include either a set of rolled and plain tenprints or 4-4-2 slap images.
- An ARR must include a set of rolled and plain tenprints. It may also include palm prints and facial images.
- A DOC must include a set of rolled and plain tenprints. It may also include palm prints.

A Mississippi Transaction Response (#2 in diagram) may be one or more of the following:

- Search Response
- Prosecutor and Court Disposition Forms,
- DNA Database Collection Form,
- Reject Notice
- Confirmation Notice

A Search Response will be either a State rap sheet or an indication that no record exists for the subject (for APP transactions only). Prosecutor and Court Disposition Forms are sent at the same time as Mississippi Search Responses for an ARR. Under certain conditions, a DNA Database Collection Form will accompany Mississippi Search Responses for an ARR. MCHS sends a Reject Notice back to a scanning station if there are uncorrectable errors in the transaction content or fingerprint quality errors are detected.

Likewise, an FBI Transaction Response (#3 in diagram) will be either:

- Search Response
- Error Response,
- Confirmation Notice

A Search Response will be either an FBI search result containing the subject's FBI rap sheet or an indication the subject is not known to the FBI. The FBI may instead respond with an Error Response if, for example, the quality of the submitted tenprints is too low to be usable. MCHS forwards FBI responses back to the scanning station.

FBI National Sex Offender Registry (NSOR) Transaction Responses (#4 in diagram) may be one or more of the following:

- NSOR Response
- Delayed NSOR Response

Both responses are sent by MCHS to the scanning station in separate email messages as part of applicant CCDBG requests.

The remaining two data flows shown in the diagram above are administrative messages. The Edit Table Download (labeled #5 in the diagram) provides tables of valid values that are used to validate data entry fields. Edit Table Download messages are sent to initialize the valid value lists on a scanning station when a station first begins operation and subsequently when the edit tables change. Typically, this occurs one or more times per month.

The last flow, labeled #6 in the diagram, provides pre-assigned numeric ranges for arrest tracking numbers (ATNs). These are used by a livescan station in each arrest transaction. The message is sent to initialize a scanning station when the station first begins operation and subsequently when all of the ATNs in the previously assigned block have been used and another block is needed. How often this occurs depends on how many arrest transactions the station sends and how large a block is assigned.

4.0 SCANNING STATION AND INTERFACE REQUIREMENTS

This section describes requirements for all transactions that a scanning station sends to the MCHS system and all messages MCHS sends to a scanning station. Details of these requirements are documented in Appendices A through H.

Section 4.1 identifies the tenprint transactions that may be sent from a scanning station to MCHS and describes their content. The messages sent from MCHS to a station are identified in Sections 4.2 and 4.3.

All scanners that are attached to the scanning station must be certified by the FBI.

4.1 TYPES OF AGENCIES AND TYPES OF SUBMISSIONS

The MCHS processes tenprint transactions for law enforcement agencies, civil applicant agencies, and the Department of Corrections. A scanning station will support multiple types of submissions for an agency depending on the type of agency that operates the scanning station and what other agencies it supports. The types of submissions required for each type of agency are as follows:

- **Law Enforcement agency:** A scanning station must support the following types of submissions: Arrest when a subject is arrested and booked, non-billable Law Enforcement Applicant background check, Criminal Inquiry Only background check, and Sex Offender Registration (APP for SOR) (Sheriff's Offices only).

Also, a law enforcement agency may support a Civil Applicant agency. If so, a single scanning station will be required to support submissions for both types of agency.

- **Civil Applicant agency:** A scanning station must support the following types of submissions: Billable Applicant transaction for background checks and resubmission of an applicant transaction as a No Charge Applicant Resubmit.

A No Charge Applicant Resubmit is used if the FBI/NGI rejects a billable transaction because the prints are not legible. In this case, the FBI allows the transaction to be corrected and resubmitted without additional charge.

- **Department of Corrections:** A scanning station must support the following types of submissions: DOC inmate intake when an inmate arrives for incarceration, non-billable Law Enforcement Applicant background check, and Sex Offender Registrations (APP for SOR).
- **Criminal Information Center:** A scanning station at the CIC must support the following types of submissions: all of the types of submissions described above and one additional type of background check - the Instate Inquiry Only.

Also, a scanning station at the CIC must be able to be set up as a special purpose station that will be allowed to submit only a specified subset of these types of submissions.

Each type of submission uses one of the three types of tenprint transactions (ARR, APP, and DOC). The type of submission is identified by the values of some key fields. The table on the following page shows the types of submissions grouped by type of agency and the required value of these key fields.

Important note for scanning station software: A scanning station must be set up so that an operator first identifies the type of submission. Then, based on this table, the scanning station prompts the operator for only the applicable fields and hardcodes field values when there is only one possible value. For Arrest Transactions, if Type 10 facial images are provided, the vendor software must be able to detect and capture facial images and populate the Type 10 fields from the captured image data in accordance with the Tenprint ICD Appendix A. All Biometrics must be captured from the subject and submitted in the transaction during the same session the identification information is entered.

Type of Submission	1.04 Type of Transaction	1.08 Arrest/Applicant / DOC Agency ORI	1.10 Transaction Control Ref No	2.037 Reason Fingerprinted
Law Enforcement Agency				

Type of Submission	1.04 Type of Transaction	1.08 Arrest/Applicant / DOC Agency ORI	1.10 Transaction Control Ref No	2.037 Reason Fingerprinted
Arrest	ARR	ORI of agency that made the arrest (same value as in field 2.702)	–	–
Law Enforcement Applicant	APP	ORI of agency that requested the background check	–	'Law Enforcement'
Criminal Inquiry Only	APP	ORI of agency that requested the inquiry	–	'CRIMINAL INQUIRY'
For Sheriff's Offices only: APP for SOR (for Sex Offender Registration)	APP	ORI of Sheriff's Office agency that processed the Sex Offender Registration	–	'Sex Offender Reg'
Civil Applicant Agency				
Billable Applicant	APP	ORI of agency that requested the background check	–	From a predefined list of reasons (Reason Fingerprinted edit table)
No Charge Applicant Resubmit	APP	ORI of agency that requested the background check	Transaction Control No from FBI's Error Response	From a predefined list of reasons (Reason Fingerprinted edit table)
Department of Corrections				
Inmate Intake	DOC	ORI of agency that processed the inmate intake	–	–
Law Enforcement Applicant	APP	ORI of agency that requested the background check	–	'Law Enforcement'
APP for SOR (for Sex Offender Registration)	APP	ORI of agency that processed the Sex Offender Registration	–	'Sex Offender Reg'
Criminal Information Center				
Arrest	ARR	ORI of agency that made the arrest	–	–
Law Enforcement Applicant	APP	ORI of agency that requested the background check	–	'Law Enforcement'
Criminal Inquiry Only	APP	ORI of agency that requested the inquiry	–	'CRIMINAL INQUIRY'

Type of Submission	1.04 Type of Transaction	1.08 Arrest/Applicant / DOC Agency ORI	1.10 Transaction Control Ref No	2.037 Reason Fingerprinted
Instate Inquiry Only	APP	ORI of agency that requested the inquiry or CIC ORI	–	'Instate Inquiry Only'
Billable Applicant	APP	ORI of agency that requested the background check	–	From a predefined list of reasons (Reason Fingerprinted edit table)
No Charge Applicant Resubmit	APP	ORI of agency that requested the background check	Transaction Control No from FBI's Error Response	From a predefined list of reasons (Reason Fingerprinted edit table)
APP for SOR (for Sex Offender Registration)	APP	ORI of Sheriff's Office or DOC agency that processed the Sex Offender Registration	–	'Sex Offender Reg'
Inmate Intake	DOC	ORI of agency where the inmate will reside	–	–

Note for cardscans: An agency may use an arrest card for a Criminal Inquiry Only request, but the cardscan must generate an APP transaction.

The MCHS tenprint ARR, APP, and DOC transaction formats follow the ANSI/NIST transmission format. The following record types must be present in each ARR, APP and DOC transaction:

- Type 1 Transaction Information Record
- Type 2 Tenprint Data Record

ARR, APP and DOC transactions must use the following when providing full tenprint transactions:

- Type 4 High-resolution Grayscale Fingerprint Image Record

APP transactions must use the following record type when providing 4-4-2 slap impressions:

- Type 14 Variable-resolution Fingerprint Image Record

The following record types are allowed and optional in some tenprint transactions:

- Type 10 Facial Image Record
- Type 15 Variable-resolution Palm Print Image Record

The scanning station must not allow submission of Type-10 Facial Images if a face is not detected in the captured photo.

[Appendix A Type 10 Record](#) and [Appendix A Type 15 Record](#) indicates which types of transaction (TOTs) may include Type 10 Facial, and Type 15 records as of the date of this document.

The appendices in this document provide details on how to build ARR, APP, and DOC transactions:

- [Appendix A](#) provides detailed requirements for each field in each type of record in a tenprint transaction. Note that the field source, value and other requirements may depend on type of transaction (ARR, APP, DOC), the type of agency where the scanning station is installed (a local agency, Dept. of Corrections, or the CIC), the type of submission (e.g., Billable Applicant), and the type of scanning station (livescan or cardscan).
- [Appendix B](#), **along with the ANSI/NIST-ITL 1-2011 transmission format**, provides details on how to properly format an overall transaction file and each record within the file. Appendix B specifies the MCHS implementation

of the ANSI/NIST standard. [Appendix B](#) provides a detailed explanation of how to use the separators in various types of tagged fields.

- [Appendix C](#) describes, in detail, how to package the transaction in an email message using SMTPS.
- [Appendix G](#) provides samples of an ARR, an APP, and a DOC transaction. These provide samples of the formats described in Appendices A and B.
- [Appendix H](#) provides samples of Type 10 Facial records and Type 15 Palm Print records.

4.2 TRANSACTION RESPONSE MESSAGES

In response to a tenprint transaction, a scanning station will receive one or more transaction response messages, via email. Some responses will be sent within minutes while others may take up to 24 hours. Each response is sent as soon as it is available.

The scanning station must have a mechanism enabled for the scanning station operator to view responses upon receipt. Additionally, the scanning station must support automatically printing responses. At the time of installation, the agency will specify whether these responses should be sent to the printer automatically.

MCHS validates the format and data content of a tenprint transaction. If an errors occurs, the transaction is not processed and a MCHS Reject Notice is sent to the scanning station. An objective of this process is to provide notification as soon as possible and often while the subject is still available, so that the transaction can be resubmitted.

The transaction response messages that are sent depend on the type of submission as shown in the table below.

Type of Submission	Transaction Response Messages
Arrest	MS Search Response, Prosecutor and Court Disposition Forms, and under certain conditions, DNA Database Collection Form - or - MCHS Confirmation Notice - or - MCHS Reject Notice FBI Search Response - or - FBI Error Response MS Warning Notice (only if warning messages are generated) MCHS Record Under Review Notice (occasionally)
Law Enforcement Applicant	MS Search Response - or - MCHS Confirmation Notice - or - MCHS Reject Notice FBI Search Response - or - FBI Error Response MCHS Record Under Review Notice (occasionally)
Criminal Inquiry Only	MS Search Response - or - MCHS Confirmation Notice- or - MCHS Reject Notice FBI Search Response - or - FBI Error Response MCHS Record Under Review Notice (occasionally)
APP for SOR (for Sex Offender Registration)	MS Search Response - or - MCHS Confirmation Notice - or - MCHS Reject Notice FBI Search Response - or - FBI Error Response MS Warning Notice (only if warning messages are generated) MCHS Record Under Review Notice (occasionally)
Billable Applicant	MS Search Response - or - MCHS Confirmation Notice -or - MCHS Reject Notice FBI Search Response - or - FBI Error Response NSOR Search Response (CCDBGa only) NSOR Delayed Hit Response (occasionally for CCDBGa) MCHS Record Under Review Notice (occasionally)

<i>Type of Submission</i>	<i>Transaction Response Messages</i>
No Charge Applicant Resubmit	MS Search Response - or - MCHS Confirmation Notice -or - MCHS Reject Notice FBI Search Response - or - FBI Error Response NSOR Search Response (CCDBGA only) NSOR Delayed Hit Response (occasionally for CCDBGA) MCHS Record Under Review Notice (occasionally)
DOC	MS Search Response - or - MCHS Confirmation Notice - or - MCHS Reject Notice FBI Search Response - or - FBI Error Response MS Warning Notice (only if warning messages are generated) MCHS Record Under Review Notice (occasionally)
Instate Inquiry Only	MS Search Response - or - MCHS Confirmation Notice - or - MCHS Reject Notice MCHS Record Under Review Notice (occasionally)

[Appendix D.1](#) describes how a transaction response message is packaged in an email message.

[Appendix D.3](#) describes the MCHS-generated search responses, disposition forms, DNA forms, and review notice.

[Appendix D.4](#) describes the MCHS-generated reject notice and [Appendix D.5](#) describes the MCHS-generated warning notice.

[Appendix D.6](#) describes the two responses generated by the FBI and [Appendix D.7](#) describes the responses generated as a result of searching the National Sex Offender Registry (NSOR).

[Section 7](#) explains how each message can be identified.

4.3 ADMINISTRATIVE MESSAGES

There are two types of administrative messages.

Edit Table Download Messages: For many fields, the value must be selected from a pre-determined list of valid values. These lists are defined by the CIC and are periodically downloaded to the scanning stations since the values in some tables change. The valid value lists on the scanning station must be automatically updated without human intervention prior to starting the next transaction when the Edit Table Download Message is received by the scanning station.

[Appendix E.1](#) describes the content of the Edit Table Download message. The appendix describes how this table is packaged in an email message, and provides a sample of this message. [Section 7](#) explains how this message can be identified for proper processing.

ATN Block Messages: Arrest Tracking Numbers (ATNs) provide a unique identifier each time a subject is arrested. ATNs are preprinted on the Arrest tenprint cards and are entered by the scanning station operator on a cardscan. However, livescans must generate the ATN when an ARR transaction is created. The numbers are controlled by the CIC and assigned to a livescan in blocks. The assigned numbers are sent to a livescan in an ATN Block message.

[Appendix E.2](#) describes the content of the message. The appendix describes how this message is packaged in an email message, and provides a sample of this message. [Section 7](#) explains how this message can be identified for proper processing.

[Appendix F](#) gives the algorithm a livescan station must use to compute the check digit that must be appended to an ATN.


5.0 SCANNING STATION CONFIGURATIONS

5.1 CONFIGURATION OPTIONS

5.1.1 Configuration 1: Single Scanning Station

The most common configuration is a single scanning station - either a livescan or a cardscan - that connects directly to MCHS and has one type of scanner device connected to it. In this configuration, a scanning station sends transactions to MCHS according to the specifications identified in Section 4.1 and receives responses from MCHS according to Section 4.2. The scanning station also handles the administrative messages described in Section 4.3.


This configuration is shown in the diagram below.

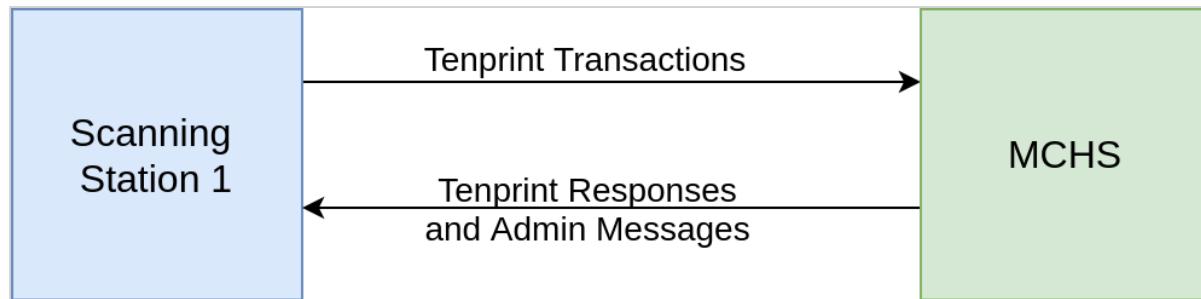

5.1.2 Configuration 2: Single Scanning Station with Cardscan and Livescan Scanners

Another configuration is similar to Configuration 1 with a single scanning station, but has two types of scanner devices attached - one for scanning cards and another for obtaining live scans of a person's prints. In other words, the single scanning station serves as both a livescan and a cardscan.


This second configuration is shown in the diagram below.

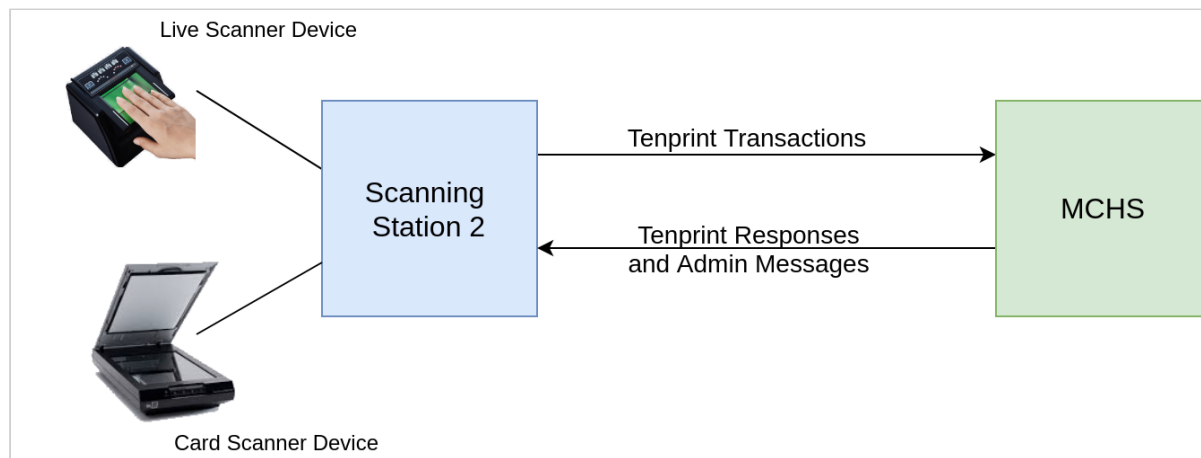

Some requirements in this document are unique to one type of scanning station or another. The single scanning station is responsible for ensuring that all transactions it submits to MCHS (Section 4.1) are compliant with the ICD requirements for each type of scanner device and for handling responses and administrative messages (Sections 4.2 and 4.3).

5.1.3 Configuration 3: Concentrator with Two Scanning Stations

A third configuration is shown in the diagram below. It connects two or more scanning stations (shown as Scanning Stations 2 and 3) to MCHS through a concentrator (also known as a Store and Forward system). In this case, MCHS only interfaces with the concentrator that is connected to MCHS as if it is a single scanning station. The concentrator forwards all transactions to MCHS (Section 4.1) and receives all responses and administrative messages (Sections 4.2 and 4.3). All transactions sent to MCHS from the concentrator are associated with the station id of the concentrator. The concentrator is constrained to only submit billable and no charge applicants to MCHS.

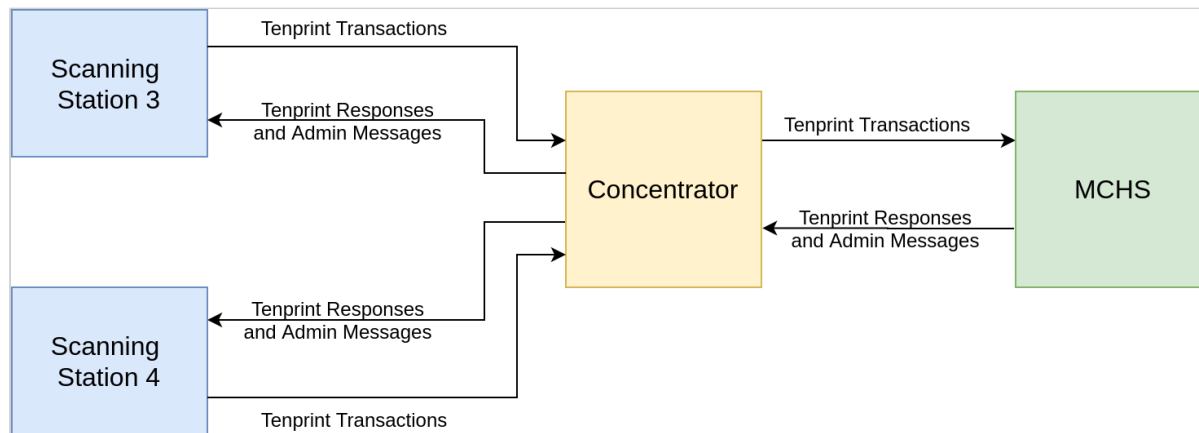

In this configuration, the concentrator is responsible for receiving transactions sent from scanning stations 3 and 4 and sending them to MCHS. Each scanning station has one scanner device attached to it. The concentrator is also responsible for routing all responses from MCHS to the scanning station that generated the corresponding transaction (or to some other appropriate destination).

The concentrator is also responsible properly distributing all administrative messages. It is responsible for ensuring that edit table downloads are distributed to all attached scanning stations.

Finally, the concentrator vendor is responsible for ensuring that all transactions it submits to MCHS are compliant with the ICD requirements from whatever type of attached scanning station created the transaction.

6.0 IDENTIFYING MESSAGES RECEIVED FROM MCHS

The following table summarizes the types of messages that MCHS may send to a scanning station and indicates how to identify them. The content of the Subject line should be sufficient for determining whether the email message contains a transaction response to be printed or an administrative message to update administrative files.

The body of each transaction response message further describes the type of response. This information is generally not needed, but could be useful for specialized processing of the responses.

Type of Message	Identification in Subject Line	Description in Message Body
Transaction Response Messages		
MS Search Response	Begins with " ARR ", " APP ", or " DOC "	A few lines down from " Mississippi Criminal History Record " contains " Mississippi Rap Sheet ".
MS Prosecutor and Court Disposition Forms	Begins with " ARR "	Second line of body contains " PROSECUTOR Disposition Form " and " COURT Disposition Form ", respectively.
Record Under Review	Begins with " ARR "	Second line of body has no text. Third line of body contains "=== RECORD UNDER REVIEW ==="
DNA Database Collection Form	Begins with " ARR "	Second line of body contains " DNA Database Collection Form ".
MS Reject Notice	Begins with " Reject: ARR " or " Reject: APP " or " Reject: DOC "	Second line of body contains "TRANSACTION REJECT NOTICE".
MS Warning Notice (for Type 15 palm print records)	Begins with " Warning: ARR " or " Warning: APP " or " Warning: DOC "	Second line of body contains "TRANSACTION WARNING NOTICE".
MS Confirmation Notice	Begins with " ARR ", " APP ", or " DOC "	Introduction section contains " Confirmation Notice "
FBI Search Response	Begins with " FBI Response "	Second line of body contains " FBI Rap Sheet (SRE) ". It also indicates whether it is in response to an arrest or an applicant transaction.
FBI Error Response	Begins with " FBI Response "	Second line of body contains " FBI Error Report (ERRT) ". It also indicates whether it is in response to an arrest or an applicant transaction.
FBI Confirmation Notice	Begins with " FBI Response "	Introduction section contains " Confirmation Notice "
NSOR Response	Begins with "NSOR Response "	A few lines down from " Mississippi Criminal History Record " contains "NSOR Response for Applicant".

Type of Message	Identification in Subject Line	Description in Message Body
NSOR Delayed Hit	Begins with "NSOR Response "	A few lines down from " Mississippi Criminal History Record " contains "NSOR Response for Applicant". A few more lines down includes " National Sex Offender Registration Information (Delayed Response) "
Administrative Messages		
Edit Table Download	Is " EDT "	
ATN Block	Is " ATN "	

Additional information regarding each type of message is found in [Appendix D](#) and [Appendix E](#).

7.0 PRINT RESPONSES FROM MCHS ON SCANNING STATION PRINTER REQUIREMENTS

Each scanning station configuration (refer to [Section 5.1](#)) must be able to be configured to use the printer to print the responses that MCHS sends to a scanning station.

- Responses include those described in [Appendix D](#) as well as message headers and up to the first 300 lines of any unidentified responses.
- The printed response must begin with the email header lines.
- A fixed-width font must be used.
 - Many of the responses do not format properly unless the scanning station uses a fixed-width font.
- Responses must print on 8 1/2 x 11 paper.
- Responses must print automatically, with no human intervention required.

8.0 PRINT TENPRINT AND PALM PRINT CARD AT SCANNING STATION REQUIREMENTS

The following are the requirements to print card images on a livescan:

- A scanning station configuration (refer to Section 5.1) must include a printer.
- Printer must be on the FBI Certified Product List and able to reproduce FBI-quality fingerprint and palm print images.
- Must be able to print on preprinted two-sided card stock and on 8 ½ x 11 paper using an embedded template such that the image and data formats appear on the paper to look like cards indicated below. Biometric images and text data must be included as indicated below:
 - **Mississippi Criminal Arrest Card:** All fingerprint positions, demographic data, and arrest data.
 - **FBI Applicant Card:** All fingerprint positions, demographic data, and arrest data.
 - **FBI Palm Print Card FD-884:** Palm print images and demographic data. (Fingerprints are not required.) Supplemental card FD-844a is not required.
 - For full palms: two cards are required.
 - For upper/lower pairs: Four cards are required with one palm pair position on each card. Include the corresponding writer's palm on each card.
 - Fill in only the front side of the card but also print the backside of the card.
- The operator must be able to enter a new transaction and print it without transmitting it to MCHS.
- For APPs, if the transaction was entered only for the purpose of printing the card, the applicant agency ORI may not be known. Therefore, in this situation, the operator must be able to specify whether or not to include the Applicant Agency ORI (in Block 9) on the card.
- The operator must be able to retrieve a stored transaction for printing.

Samples of the arrest, applicant, and palm print cards are found in [Appendix I](#).

9.0 STORE, RETRIEVE, RESUBMIT TRANSACTION ON SCANNING STATION REQUIREMENTS

The scanning station must provide a mechanism storing transactions and subsequently for the station operator to retrieve, modify and resubmit transactions.

- The scanning station must store all submitted transactions for a minimum of 30 days. Note that some agencies submit a high volume of transactions so 30 days could mean a substantial number of transactions.
- An operator must be able to retrieve a stored transaction for printing on the scanning station.
- An operator must be able to modify and resubmit a stored transaction to MCHS.
 - The station operator must be given the option to send the transaction with the same TCN.
 - For billable applicants, for a No Charge Applicant Resubmit, the scanning station may automatically populate field 1.10 Transaction Control Reference Number with the TCN of the FBI's ERRT response.
- An operator must have the option to save an unsent transaction.
- An operator must be able to retrieve an unsent transaction, update it, and send it to MCHS.

10.0 SECURITY REQUIREMENTS

Scanning stations must meet the requirements specified in the version of the MCHS Security Policy that is in effect at the time of certification. The MCHS Security Policy fully incorporates the FBI's CJIS Security Policy that dictates security requirements for systems that access the FBI's NCIC and NGI data.

Security policy includes requirements for transmission of transactions between the station and MCHS, operator authentication and authorization, and requirements if the station hosts other applications in addition to those specified in this document.

Contact the CIC for a copy of the Security Policy.

The vendor will need to contact the agency where the scanning station will be installed to determine their network configuration since it will impact an individual station's security requirements. Then, the vendor must coordinate with the CIC to determine an acceptable implementation of the security requirements.

If scanning station is not directly connected to the State network, vendor must be approved by the CIC to connect to MCHS via VPN-IPSEC services. If vendor is approved to connect via VPN-IPSEC services, split tunneling is not allowed for any purpose, include accessing print services.

Transactions are sent to MCHS using the SMTPS protocol and responses are retrieved from MCHS using the POP3S protocol. The POP3S protocol requires a login as part of the session. The login name and password for a station will be provided prior to installation of each scanning station (refer to [Section 5.2](#)).

Additional SMTPS and POP3S requirements are found in [Appendix C.1](#) and [Appendix D.1](#). Note that non-secure SMTP and POP3 is not allowed. Only SMTPS and POP3S protocols are allowed for interfacing with MCHS.

11.0 CIC CERTIFICATION REQUIREMENTS

For each type of scanning station, each type of submission for each type of agency (as described in [Section 4.1](#)), and each make/model of tenprint-only and palm print scanner must be certified by the CIC before they can be installed at a local agency, MDOC, or the CIC.

The vendor must install and operate a test configuration including equipment and software in the CIC test environment. The test configuration must include concentrator (if applicable), scanning stations, all biometric scanners, printer, camera and operating documentation, user manuals, or other materials that would normally accompany any subsequently purchased system. The test configuration must be either an exact replica of a system to be installed at a customer site or a typical/representative configuration.

Vendor must provide sample transactions prior to testing on-site at the CIC.

Refer to the following documents:

- Instructions for Sample Transactions to Submit to CIC for Pre-Certification Review
- MCHS Tenprint Certification Test Procedures
 - In order to submit type-10 facial images in Arrest transactions, vendors must include facial images in the Law Enforcement Agency certification tests during certification at CIC.
 - In order submit 4-4-2 Type-14 slap impression Applicant transactions, vendors must perform the Billable Applicant 4-4-2 certification tests during certification at CIC.
 - Palm prints are allowed to be submitted from each individual site only after completion of Palm Print Certification Phase at each individual site.

After successfully passing certification testing on-site at the CIC, certification will be issued to the Vendor in the company's name.

Vendor will be required to re-certify each Scanning Station Configuration two years after certification approval. Automatic re-certification may be granted by the CIC if the scanning station maintains compliance with the MCHS Tenprint ICD. Vendors who fail to follow procedures outlined in ICD 5.10 will be required to re-certify at the CIC Director's discretion.

Effective June 1, 2023, all vendors are required to be certified with 5.10. On this date, all new stations including printers, scanners and any other devices installed will only be authorized to submit transactions using version 5.10. Existing stations implementing MCHS Tenprint ICD version 5.02 will be required to upgrade to version 5.10 by June 1, 2024. No certification testing on software or hardware will be conducted for ICD 5.02; however, software and hardware currently using 5.02 will continue to receive support until May 31, 2024.

Contact the CIC for more information and to schedule certification.

12.0 APPENDIX A - CONTENT OF EACH RECORD TYPE IN A TRANSACTION

The ANSI/NIST tenprint transaction includes multiple records. This appendix describes the requirements for each field in each record.

In order to ensure that all of the data in a transaction belongs to the specified individual, it is essential to build completely new records for each new transaction. If data is carried over from a previous transaction, this can cause data to be erroneously associated with a subject or to be incorrectly processed.

The content of many of the fields is determined by valid value lists that must be built using the downloaded edit tables described in [Appendix E.1](#). The agency and vendor may wish to use valid value lists for other fields as well. If so, the content of any valid value lists needs to be coordinated with the CIC.

12.1 A.1 TYPE 1 TRANSACTION INFORMATION RECORD

The Type 1 record is required to be the first record in the tenprint transaction.

- The table in this appendix describes the requirements for each of the fields in the Type 1 record.
- The following applies to fields 1.07 Print Agency ORI and 1.08 Arrest/Applicant/DOC Agency ORI in the cases where they are user-entered:
 - The edit tables must be used to populate valid value lists for use by the operator at the livescan or cardscan and to validate the transaction before it is sent to MCHS.
 - For fields that use valid value lists, the operator must not be able to enter any value other than one of the values from the valid value list.

The field type is identified in the "Field" column. Use this to refer to [Appendix B.1](#) for an explanation of how to properly format the field in the NIST record.

The source of the data for each field is also identified in the first column. It is one of the following:

- **User-entered:** Value is entered by the livescan or cardscan operator.
- **Generated:** Value is generated by the scanning station software. It is never entered by the operator.
- **Hardcoded:** Value is specified by the ICD and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Hardcoded - agency-specific:** Value is specified by the CIC in coordination with the agency and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Pre-set default:** The value will be selected by the user from predetermined list of values, but a pre-specified likely value is presented to the operator by the scanning station software. The operator will select a different value if the pre-set default is not the correct value for the transaction. The value must be reset to the pre-set default before the next transaction is entered.

For a couple fields, the source varies depending on the type of scanning station.

Applicability of a field to a type of transaction is indicated in the "ARR", "APP", and "DOC" columns. If there are further conditions with regard to applicability, this is explained in the "Requirements" column. Be sure to refer to [Section 4.1](#) for additional discussion of which fields are applicable to a transaction type depending on the purpose of the submission.

For most fields, the requirements described in the "Requirements" column are the same for each of the three transaction types. If there are differences, the specific requirements are described for each transaction type.

If there are inter-dependencies between fields, they are included in the Requirements column and identified as cross-field validations.

Note on table below: the **field type**, **source** and **value** depend on:

- Type of transaction (ARR, APP, DOC)
- Type of submission (e.g., Billable Applicants)

- Type of agency where the scanning station is installed (a local agency, DOC, or the CIC)
- Type of scanning station (livescan or cardscan).

Field	ARR	APP	DOC	Requirements
1.01 <u>Record Header</u> Field Type: Simple non-repeating Source: Generated	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 9 Value and Format: The length of this record, including this field.
1.02 <u>Version Number</u> Field Type: Simple non-repeating Source: Hardcoded This field contains the version number of the Interface Control Document.	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 4 Value and Format: Must be '0510'.
1.03 <u>Transaction Content</u> Field Type: Group repeating Source: Generated The information in this field identifies the contents of the transaction in terms of record types and the sequence in which they appear.	ARR	APP	DOC	Required: Yes Occurrences: Determined by actual number of records present in the transaction. Value and Format: <ul style="list-style-type: none"> • Both Type and IDC must be populated in an occurrence. • The first occurrence pair indicates how many records (other than the Type 1 record) are in the transaction. • The subsequent occurrences are an index to each of the records (other than the type 1 record) that are included in the transaction. They must be recorded in the occurrences in this field in the same sequence as the records actually appear in the transaction.
First Record Category Code -- first occurrence of Transaction Content	ARR	APP	DOC	Length: 1 Value and Format: Must be '1' indicating Record Type 1.
Content Record Count -- first occurrence of Transaction Content	ARR	APP	DOC	Length: Maximum 2 Value and Format: <ul style="list-style-type: none"> • Total number of Type 2, 4, 10, 14 and 15 records in the transaction. (Do not count the Type 1.)
Record Category Code -- subsequent occurrences	ARR	APP	DOC	Length: Maximum 2 Value and Format: <ul style="list-style-type: none"> • Record Type (i.e., '2', '4', '10', '14' or '15') of a record in the transaction.

Field	ARR	APP	DOC	Requirements								
Information Designation Character -- subsequent occurrences	ARR	APP	DOC	Length: Maximum 9 Value and Format: <ul style="list-style-type: none">A unique number assigned to the Type 2, 4, 10, 14 or 15 records.See Appendix B.4 for additional requirements.								
1.04 <u>Type of Transaction (TOT)</u> Field Type: Simple non-repeating Source: Generated	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 3 Value and Format: Must be one of the following values: <table><tr><th>Value</th><th>Description</th></tr><tr><td>APP</td><td>Applicant Transaction</td></tr><tr><td>ARR</td><td>Arrest Transaction</td></tr><tr><td>DOC</td><td>DOC Inmate Receipt Transaction</td></tr></table>	Value	Description	APP	Applicant Transaction	ARR	Arrest Transaction	DOC	DOC Inmate Receipt Transaction
Value	Description											
APP	Applicant Transaction											
ARR	Arrest Transaction											
DOC	DOC Inmate Receipt Transaction											
1.05 <u>Transaction Date</u> Field Type: Simple non-repeating Source: Generated This field contains the date the transaction is created.	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 8 Value and Format: <ul style="list-style-type: none">Must be in the format CCYYMMDD where CC is 19 or 20 and YY is 00 through 99.CCYYMMDD must be a valid calendar date and value must not be in the future.								
1.07 <u>Print Agency ORI</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none">For transactions submitted from a livescan, hardcoded - agency-specificFor transactions submitted from a cardscan, user-entered This field contains the ORI of the agency responsible for capturing the fingerprints from the subject.	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 9 Value and Format: <ul style="list-style-type: none">Must be on the Agency edit table.For livescans, this field must be the same agency ORI that is assigned to the livescan by the CIC.								

Field	ARR	APP	DOC	Requirements
1.08 <u>Arrest/Applicant/DOC Agency ORI</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none"> • For ARRs, generated from another field • For APPs: <ul style="list-style-type: none"> ◦ For transactions submitted from a local agency, either user-entered or pre-set default ◦ For Instate Inquiry Only transactions submitted from the CIC, either user-entered or hardcoded - agency-specific ◦ For all other transactions submitted from the CIC, user-entered • – For DOCs, pre-set default 	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 9 Value and Format: <ul style="list-style-type: none"> • For ARRs, copy value from field 2.702; must be on the Enforce Agency edit table. • For APPs, value must be on the Agency edit table. • For DOCs, value must be on the Correct Agency edit table. • Note: On the display, shorten the name to the applicable agency type based on the type of transaction.

Field	ARR	APP	DOC	Requirements
<p>1.09 <u>Transaction Control Number (TCN)</u> Field Type: Simple non-repeating Source:</p> <ul style="list-style-type: none"> For production transactions, generated For test transactions, user-entered 	ARR	APP	DOC	<p>Required: Yes Occurrences: 1 Length: Minimum 1; maximum 40 Value and Format:</p> <ul style="list-style-type: none"> A unique number assigned to the transaction. For production transactions, the format is: <station_id>-<current_date>-<sequence_number> where: <ul style="list-style-type: none"> the station_id is assigned by the CIC the current_date is in the format CCYYMMDD the sequence_number is a 4-digit number from 0001 to 9999. When 9999 is used, reset the sequence_number to 0001. For test transactions, the format is: CERT-<station_id>-<descriptive_name> where: <ul style="list-style-type: none"> the first 5 characters must be 'CERT-' the station_id is assigned by the CIC the descriptive name is as defined in the Certification document or other names assigned to additional test transactions
<p>1.10 <u>Transaction Control Ref No (TRN)</u> Field Type: Simple non-repeating Source:</p> <ul style="list-style-type: none"> For No Charge Applicant Resubmits, pre-populated or user-entered For all other types of submission, this field is not applicable <p>This field contains the FBI-assigned TCN that was in the FBI Error Response message for the rejected Billable Applicant transaction.</p>		APP		<p>Required: Yes for No Charge Applicant Resubmits (Must not be present for any other type of submission) Occurrences: 1 Length: Minimum 10; maximum 40 Value and Format:</p> <ul style="list-style-type: none"> May contain alphabetic, numeric, or any printable 7-bit ascii character.

Field	ARR	APP	DOC	Requirements
1.11 <u>Native Scanning Resolution</u> Field Type: Simple non-repeating Source: Hardcoded The size of a pixel in millimeters.	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 5 Value and Format: Must be '19.69'.
1.12 <u>Nominal Transmitting Resolution</u> Field Type: Simple non-repeating Source: Hardcoded The size of a pixel in millimeters.	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 5 Value and Format: Must be '19.69'.
1.13 <u>Domain Version</u>	ARR	APP	DOC	Required: Yes Occurrences: 1 Value and Format: Both subfields are required in each occurrence.
Domain Name	ARR	APP	DOC	Length: Fixed length of 4 Value and Format: Must be 'MCHS'.
Domain Version Number Source: Description from Hair Color Edit Table entry 'ZZDoNotUse'	ARR	APP	DOC	Length: Maximum 23 Value and Format: Must be copied from the indicated edit table entry.

12.2 A.2 TYPE 2 TENPRINT DATA RECORD

The Type 2 record contains descriptive information about the individual and, for an ARR, the arrest information.

- **A scanning station must not allow a transaction to be sent to MCHS unless each field validates against the requirements in this section. The scanning station must perform each of the validations identified in the table in this section.**
- Scanning station must pre-populate fields that have a category of 'Hardcoded-default' and all other fields must not be prepopulated.
- Scanning station software must not allow an operator to override the values in fields that are "Generated", "Hardcoded", or "Hardcoded - agency-specific". Also, these fields do not need to be displayed.
- The values in all fields, other than the preset fields described above, must be cleared before an operator can begin entering a new transaction.
- The edit tables must be used by the scanning station software to populate valid value lists for use by the operator at the scanning station and to validate the transaction before it is sent to MCHS.
- For fields that use valid value lists, the scanning station operator must not be able to enter any value other than one of the values from the valid value list.
- For fields that do not use valid value lists, the scanning station must display an error to the operator if the value does not meet the field validation requirements specified in this appendix.
- For new certifications, fields with cross-field validations, the scanning station must display an error to the operator if the valued do not meet the cross-field validation requirements specified in this appendix.
- For fields that do not use valid value lists or are not all numeric, an operator must be able to enter text in mixed case.
- On cardscans, the fields must be presented to the operator in the sequence that they appear on the Mississippi Criminal Arrest Card and the FBI Applicant Card.
- On cardscans, creating DOC transactions is not applicable (since MDOC does not use printed cards at this time).

- The table in this appendix describes the requirements for each of the fields in the Type 2 record.
- The requirements for field 2.084 and record Type 4 to specify a partial amputation, a full distal amputation, and an otherwise unprintable rolled finger position are in [Appendix A.7](#)

A field type for each field is identified in the "Field" column. Use this to refer to [Appendix B.1](#) for an explanation of how to properly format the field in the NIST record.

The source of the data for each field is also identified in the first column. It is one of the following:

- **User-entered:** Value is entered by the livescan or cardscan operator.
- **Generated:** Value is generated by the scanning station software. It is never entered by the operator.
- **Hardcoded:** Value is specified by the ICD and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Hardcoded - agency-specific:** Value is specified by the CIC in coordination with the agency and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Pre-set default:** The value will be selected by the user from predetermined list of values, but a pre-specified likely value is presented to the operator by the scanning station software. The operator will select a different value if the pre-set default is not the correct value for the transaction. The value must be reset to the pre-set default before the next transaction is entered.

In one or two cases, the source varies depending on the type of scanning station.

Applicability of a field to a type of transaction is indicated in the "ARR", "APP", and "DOC" columns. If there are further conditions with regard to applicability, this is explained in the "Requirements" column. Refer to [Section 4.1](#) for additional discussion of which fields are applicable to a transaction type depending on the purpose of the submission.

For most fields, the requirements described in the "Requirements" column are always the same for each of the three transaction types. If there are differences, the different cases are described.

The valid values of many of the Type 2 fields are defined in the Edit Tables that are downloaded to the scanning station (see [Appendix E.1](#)). Otherwise, the types of characters allowed in the field are described in the "Requirements" column. The following abbreviations are used:

- **A** = alphabetic, upper or lower case,
- **N** = numeric,
- **S** = special characters; this may be followed by further restrictions that indicates that "only" the specified subset of special characters is allowed.

If there are inter-dependencies between fields, they are included in the Requirements column and identified as cross-field validations.

Note that the field source, value and other requirements may depend on type of transaction (ARR, APP, DOC), the type of submission (e.g., Billable Applicants), the type of agency where the scanning station is installed (a local agency, DOC, or the CIC), or the type of scanning station (livescan or cardscan).

Field	ARR	APP	DOC	Requirements
2.001 <u>Record Header</u> Field Type: Simple non-repeating Source: Generated	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 9 Value and Format: Length of this record, including this field.

Field	ARR	APP	DOC	Requirements
2.002 <u>Information Designation Character (IDC)</u> Field Type: Simple non-repeating Source: Generated	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 9 Value and Format: <ul style="list-style-type: none">• A unique number assigned to the record.• See Appendix B.4 for additional requirements.
2.009 <u>Originating Agency Case #</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP		Required: No Occurrences: 1 Length: Minimum 4; maximum 20 Value and Format: Characters: ANS, only spaces and hyphens
2.016 <u>Social Security #</u> Field Type: Simple repeating Source: User-entered	ARR	APP	DOC	Required: No Occurrences: Maximum 4 Length: Fixed length of 9 Value and Format: <ul style="list-style-type: none">• Characters: N• The following values are not allowed:<ul style="list-style-type: none">◦ positions 1-3 (area) cannot be 000 or 666 or 900-999◦ positions 4-5 (group) cannot be 00◦ positions 6-9 (serial number) cannot be 0000◦ 11111111
2.017 <u>Miscellaneous Id #</u> Field Type: Group repeating Source: User-entered	ARR	APP	DOC	Required: No Occurrences: Maximum 4 Value and Format: Both Type and Value must be populated in an occurrence.
Misc Id # Type	ARR	APP	DOC	Length: Maximum 15 Value and Format: Value must be in Misc Number Type edit table.
Misc Id # Value	ARR	APP	DOC	Length: Maximum 12 Value and Format: Characters: ANS, only hyphens.
2.018 <u>Name</u> Field Type: Group repeating Source: User-entered This field contains the subject's name and any aliases.	ARR	APP	DOC	Required: Yes Occurrences: Maximum 10 Value and Format: <ul style="list-style-type: none">• Both Last Name and First Name must be populated in an occurrence.• To specify a nickname: A single 'X' must be in the First Name field with the nickname in the last name field. Middle name and name suffix fields must be null.
Last Name	ARR	APP	DOC	Length: Maximum 35 Value and Format: Characters: AS, only hyphens, apostrophes, and spaces

Field	ARR	APP	DOC	Requirements
First Name	ARR	APP	DOC	Length: Maximum 20 Value and Format: Characters: AS, only hyphens, apostrophes, and spaces
Middle Name	ARR	APP	DOC	Length: Maximum 20 Value and Format: Characters: AS, only hyphens, apostrophes, and spaces
Name Suffix	ARR	APP	DOC	Length: Maximum 4 Value and Format: Value must be in Name Suffix edit table.
2.020 <u>Place of Birth</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 2 Value and Format: Value must be in the Place of Birth edit table.
2.021 <u>Country of Citizenship</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: No Occurrences: 1 Length: Fixed length of 2 Value and Format: Value must be in the Country edit table.
2.022 <u>Date of Birth</u> Field Type: Simple repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: Maximum 5 Length: Fixed length of 8 Value and Format: <ul style="list-style-type: none"> • Must be in the format CCYYMMDD where CC is 19 or 20 and YY is 00 through 99. CCYYMMDD must be a valid calendar date. • Value cannot be more than 110 years before Transaction Date with the exception that 19000101 must be allowed. (Cross-field validation) • For APPs for SOR and DOCs, value must be 14 or more years less than the Date Printed. (Cross-field validation) • For ARRs: <ul style="list-style-type: none"> ◦ Value must be 13 or more years less than Date Printed. (Cross-field validation) ◦ Value must be 13 or more years less than Date of Offense. However if Date of Offense is not supplied, Date of Birth must be 13 or more years less than Date of Arrest. (Cross-field validation) ◦ Value must be consistent with Arrest Type and Date of Offense. Age at Date of Offense must be less than 18 if Arrest Type is 'Juv-As-Adult' -or-greater than or equal to 18 if Arrest Type is 'Adult'. However if Date of Offense is not supplied, age at Date of Arrest must be less than 18 if Arrest Type is 'Juv-As-Adult' -or-greater than or equal to 18 if Arrest Type is 'Adult'. (Cross-field validation)

Field	ARR	APP	DOC	Requirements
2.024 <u>Sex/Gender</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 6 Value and Format: <ul style="list-style-type: none"> Characters: Value must be in the Sex edit table.
2.025 <u>Race</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 7 Value and Format: <ul style="list-style-type: none"> Characters: Value must be in the Race edit table.
2.026 <u>Scars, Marks, and Tattoos (SMT)</u> Field Type: Group repeating Source: User-entered	ARR	APP	DOC	Required: No Occurrences: Maximum 10 Value and Format: Code must be populated in an occurrence.
SMT Code	ARR	APP	DOC	Length: Maximum 20 Value and Format: Value must be in Tattoo edit table.
SMT Description	ARR	APP	DOC	Length: Maximum 20 Value and Format: Characters: ANS
2.027 <u>Height</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 3 Value and Format: <ul style="list-style-type: none"> Value must be in feet and inches (fii) format where f must be from 4 to 7 and ii must be from 00 to 11.
2.029 <u>Weight</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 3 Value and Format: <ul style="list-style-type: none"> Value must be in the range 070 through 600. For values less than 100, a leading zero is required.
2.031 <u>Eye Color</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 10 Value and Format: Value must be in the Eye Color edit table.
2.032 <u>Hair Color</u> Field Type: Simple non-repeating Source: User-entered	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Maximum 10 Value and Format: Value must be in the Hair Color edit table.

Field	ARR	APP	DOC	Requirements
2.035 <u>Palmprints Available</u> Field Type: Simple non-repeating Source: User-entered	ARR		DOC	Required: Yes Occurrences: 1 Length: Maximum 3 Value and Format: Value must be in the Yes/No edit table.
2.036 <u>Photo Available</u> Field Type: Simple non-repeating Source: User-entered	ARR		DOC	Required: Yes Occurrences: 1 Length: Maximum 3 Value and Format: <ul style="list-style-type: none"> Value must be in the Yes/No edit table.
2.037 <u>Reason Fingerprinted</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none"> For Billable Applicant APPs and No Charge Applicant Resubmit APPs, user-entered For Law Enforcement Applicant, Criminal Inquiry Only, Instate Inquiry APPs, and APP for SORs, hardcoded 		APP		Required: Yes Occurrences: Maximum 1 Length: Maximum 30 Value and Format: <ul style="list-style-type: none"> For Billable Applicant APPs and No Charge Applicant Resubmit APPs, value must be in the Reason Fingerprinted edit table. For Law Enforcement Applicant APPs, value must be 'Law Enforcement'. For Criminal Inquiry Only APPs, value must be 'CRIMINAL INQUIRY'. For Instate Inquiry APPs, value must be 'Instate Inquiry Only'. For APP for SOR, value must be 'Sex Offender Reg'
2.038 <u>Date Printed</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none"> For all transactions submitted from a livescan, generated (the current date) For APPs submitted from a cardscan, user-entered For ARR and DOCs submitted from a cardscan, generated <p>This field contains the date the subject's fingerprints were captured.</p>	ARR	APP	DOC	Required: Yes Occurrences: 1 Length: Fixed length of 8 Value and Format: <ul style="list-style-type: none"> Must be in the format CCYYMMDD where CC is 19 or 20 and YY is 00 through 99. CCYYMMDD must be a valid calendar date. Value must be less than or equal to the current date. Value must be less than or equal to Transaction Date. (Cross-field validation) For ARRs submitted from cardscans, copy the value from field 2.045 Date of Arrest. Note: The CIC sets maximums for how old submitted prints can be based on various factors. These may change from time to time and scanning stations do NOT implement these validations. The following are the current limits: <ul style="list-style-type: none"> 60 days for APPs from Livescan 20 years for APPs from Cardscan or Mixed 366 days for ARRs from Livescan 90 days for ARRs from Mixed or Cardscan

Field	ARR	APP	DOC	Requirements
2.039 <u>Employment</u> Field Type: Group non-repeating Source: User-entered	ARR	APP		Required: No Occurrences: 1 If Employment is present, at least one of Occupation, Employer Name, or Address 1, 2 or 3 must be populated.
Occupation	ARR	APP		Length: Maximum 50 Value and Format: Characters: ANS
Employer Name	ARR	APP		Length: Maximum 29 Value and Format: Characters: ANS
Employer Address 1	ARR	APP		Length: Maximum 29 Value and Format: Characters: ANS
Employer Address 2	ARR	APP		Length: Maximum 29 Value and Format: Characters: ANS
Employer Address 3	ARR	APP		Length: Maximum 29 Value and Format: Characters: ANS
2.041 <u>Residence</u> Field type: Group non-repeating Source: User-entered	ARR	APP		Required: No with one exception: <ul style="list-style-type: none"> For APPs for SOR: Field is required Occurrences: 1 If Residence is present, at least one of Address 1, 2 or 3 must be populated.
Residence Address 1	ARR	APP		Length: Maximum 35 Value and Format: Characters: ANS
Residence Address 2	ARR	APP		Length: Maximum 35 Value and Format: Characters: ANS
Residence Address 3	ARR	APP		Length: Maximum 35 Value and Format: Characters: ANS
2.045 <u>Date of Arrest</u> Field Type: Simple non-repeating Source: User-entered	ARR			Required: Yes Occurrences: 1 Length: Fixed length of 8 Value and Format: <ul style="list-style-type: none"> Must be in the format CCYYMMDD where CC is 19 or 20 and YY is 00 through 99. CCYYMMDD must be a valid calendar date. Value must be less than or equal to the current date. Value must be less than or equal to Transaction Date and Date Printed. (Cross-field validation)

Field	ARR	APP	DOC	Requirements
2.056 <u>Caution Comments</u> Field Type: Simple non-repeating Source: User-entered	ARR		DOC	Required: No Occurrences: 1 Length: Maximum 50 Value and Format: Characters: ANS
2.067 <u>Image Capture Equipment</u> Field Type: Group non-repeating Source: Hardcoded - agency-specific for each scanner Make, Model, and Serial Number of the device that was used to capture the fingerprints	ARR	APP	DOC	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Make, Model, and Serial Number must all be populated.
Equipment Make	ARR	APP	DOC	Length: Maximum 25 Value and Format: Must be CIC-specified standard text.
Equipment Model	ARR	APP	DOC	Length: Maximum 25 Value and Format: Must be CIC-specified standard text.
Equipment Serial #	ARR	APP	DOC	Length, Value and Format: <ul style="list-style-type: none"> • For livescans and cardscans that connect directly to MCHS: <ul style="list-style-type: none"> ◦ Unique identification assigned to the scanner that captured the prints or the card. (i.e cannot be all zeroes or other values that indicate not specified.) ◦ Length: Minimum: 5; Maximum: 25 • For livescans and cardscans that connect to a concentrator: <ul style="list-style-type: none"> ◦ Unique serial number must be followed by a pipe delimiter and the name of the livescan or cardscan vendor. (E.g., "25841A SCANCO") ◦ Length: Maximum 40 <ul style="list-style-type: none"> • Serial Number Length: Min 5; Max 25 • Name of vendor: Max 14; CIC-defined value.

Field	ARR	APP	DOC	Requirements																												
2.084 <u>Amputated or Bandaged</u> Field Type: Group repeating Source: User-entered	ARR	APP	DOC	Required: In accordance with the following: <ul style="list-style-type: none">For submissions with rolled fingers, all 10 rolled finger positions must be accounted for in the transaction so there must be either a Type-4 record with an image or an indicator in field 2.084, or both, for each of the 10 rolled finger positions.For 4-4-2 slap submissions, all 3 slap finger positions must be accounted for in the transaction so there must be either a Type-14 record with an image or an indicator in field 2.084, or both.MCHS follows the FBI EBTS specification for using field 2.084 to specify partial amputation vs full amputation vs unprintable for any reason other than full amputation. Refer to Appendix A.7 for detailed explanation. Occurrences: Maximum 10 Value and Format: <ul style="list-style-type: none">Both Finger Number and Amputated or Bandaged Code must be populated in an occurrence.Must comply with Appendix A.7.																												
Finger Position	ARR	APP	DOC	Length: Maximum 2 Characters: N Value and Format: Must be one of the following values: <table><tr><th>Position</th><th>Description</th></tr><tr><td>01</td><td>Right thumb</td></tr><tr><td>02</td><td>Right index finger</td></tr><tr><td>03</td><td>Right middle finger</td></tr><tr><td>04</td><td>Right ring finger</td></tr><tr><td>05</td><td>Right little finger</td></tr><tr><td>06</td><td>Left thumb</td></tr><tr><td>07</td><td>Left index finger</td></tr><tr><td>08</td><td>Left middle finger</td></tr><tr><td>09</td><td>Left ring finger</td></tr><tr><td>10</td><td>Left little finger</td></tr><tr><td>13</td><td>Plain right four fingers</td></tr><tr><td>14</td><td>Plain left four fingers</td></tr><tr><td>15</td><td>Plain left and right thumbs</td></tr></table>	Position	Description	01	Right thumb	02	Right index finger	03	Right middle finger	04	Right ring finger	05	Right little finger	06	Left thumb	07	Left index finger	08	Left middle finger	09	Left ring finger	10	Left little finger	13	Plain right four fingers	14	Plain left four fingers	15	Plain left and right thumbs
Position	Description																															
01	Right thumb																															
02	Right index finger																															
03	Right middle finger																															
04	Right ring finger																															
05	Right little finger																															
06	Left thumb																															
07	Left index finger																															
08	Left middle finger																															
09	Left ring finger																															
10	Left little finger																															
13	Plain right four fingers																															
14	Plain left four fingers																															
15	Plain left and right thumbs																															
Amputated or Bandaged Code	ARR	APP	DOC	Length: Maximum 2 Value and Format: <ul style="list-style-type: none">Characters: Value must be on AMP or BAND Code edit table.																												

Field	ARR	APP	DOC	Requirements
2.701 <u>Arrest Tracking #</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none"> For cardscans, user-entered For livescans, generated from ATN Blocks 	ARR			Required: Yes Occurrences: 1 Length: Fixed length of 10 Value and Format: <ul style="list-style-type: none"> Characters: AN Field must have correct check digit. See Appendix F. For livescans, value must be within a range allocated to the livescan. See Appendix E.2.
2.702 <u>Arrest Agency ORI</u> Field Type: Simple non-repeating Source: Pre-set default	ARR			Required: Yes Occurrences: 1 Length: Fixed length of 9 Value and Format: Value must be in the Enforce Agency edit table.
2.703 <u>Driver's License</u> Field Type: Group repeating Source: User-entered	ARR	APP	DOC	Required: No Occurrences: Maximum 4 Value and Format: State and License # must both be present in an occurrence.
Driver's License State	ARR	APP	DOC	Length: Fixed length of 2 Value and Format: Value must be in the State edit table.
Driver's License #	ARR	APP	DOC	Length: Maximum 20 Value and Format: Characters: ANS
2.704 <u>Arrest Type</u> Field Type: Simple non-repeating Source: User-entered	ARR			Required: Yes Occurrences: 1 Length: Maximum 14 Value and Format: Value must be in the Arrest Type edit table.
2.705 <u>Arrest Charge Set</u> Field Type: Group repeating Source: User-entered	ARR			Required: Yes Occurrences: Maximum 98 Value and Format: The following subfields are required in each occurrence: <ul style="list-style-type: none"> Citation # Counts Action
Citation	ARR			Length: Maximum 21 Value and Format: <ul style="list-style-type: none"> For transactions submitted from a local agency, value must be in the Statute edit table. For transactions submitted from the CIC, value must be in the Statute_CIC edit table.

Field	ARR	APP	DOC	Requirements
Charge Description	ARR			Length: Maximum 140 Value and Format: Characters: ANS
Supplement This field contains information that indicates the role of the subject in this crime. For example: 'Conspiracy, Abet'.	ARR			Length: Maximum 40 Value and Format: <ul style="list-style-type: none"> Each individual value must be in the Supplement edit table. Allow multiple values delimited by a comma if more than one value is entered. Each individual value has a maximum length of 15.
Severity	ARR			Length: Maximum 11 Value and Format: Value must be in the Severity edit table.
# Counts	ARR			Length: Maximum 3 Value and Format: <ul style="list-style-type: none"> Characters: N Value must be in the range 1 through 999.
Date of Offense	ARR			Length: Fixed length of 8 Value and Format: <ul style="list-style-type: none"> Must be in the format CCYYMMDD where CC is 19 or 20 and YY is 00 through 99. CCYYMMDD must be a valid calendar date. Value must be less than or equal to the current date. Value must be less than or equal to Transaction Date, Date Printed, and Date of Arrest. (Cross-field validation)
Action	ARR			Length: Maximum 25 Value and Format: Value must be in the Enforce Event edit table.
Charge Remarks	ARR			Length: Maximum 50 Value and Format: Characters: ANS

Field	ARR	APP	DOC	Requirements
2.706 <u>Fee Paid</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none"> For Billable Applicant APPs, user-entered For No Charge Resubmits, Law Enforcement Applicant, Criminal Inquiry Only, and Instate Inquiry APPs, this field is not applicable. This field contains the amount of the fee charged for this applicant background check.		APP		Required: No Occurrences: 1 Length: Maximum 6 Value and Format: <ul style="list-style-type: none"> Characters: NS, only period. Must be in whole dollars or dollars and cents.
2.707 <u>Response Address</u> Field Type: Simple non-repeating Source: User-entered		APP		Required: No Occurrences: 1
Response Addressee		APP		Length: Maximum 50 Value and Format: Characters: ANS
Response Address 1		APP		Length: Maximum 35 Value and Format: Characters: ANS
Response Address 2		APP		Length: Maximum 35 Value and Format: Characters: ANS
Response Address 3		APP		Length: Maximum 35 Value and Format: Characters: ANS
Response Phone #		APP		Length: Maximum 20 Value and Format: Characters: ANS
2.709 <u>DOC #</u> Field Type: Simple non-repeating Source: User-entered			DOC	Required: Yes Occurrences: 1 Length: Maximum 10 Value and Format: Characters: AN

12.3 A.3 TYPE 4 HIGH-RESOLUTION GRAYSCALE FINGERPRINT IMAGE RECORD

The Type 4 record is used for fingerprint images. A set of images is required in ARR, APP, and DOC tenprint transactions.

- A scanning station must not allow a transaction to be sent to MCHS unless each field validates against the requirements in this section.
- The fingerprint image must
 - Be captured using an FBI-approved scanner
 - Be compressed using FBI-approved WSQ compression software. Also, any image manipulation (e.g., cropping) must be done before the image is compressed.
- Usually there are 14 Type 4 records in a tenprint transaction – 10 individual rolled finger positions, the left and right four-finger plain positions, and the two plain thumb positions. There may be fewer positions as described in [Appendix A.7](#). All fingers must be accounted for in either Type 4 records or in field 2.084 in the Type 2 record.
- At least one Type 4 record is required in a transaction for ARR and DOC tenprint transaction.
- APP transactions must provide either at least one Type 4 record or Type 14 records with the 4-4-2 slap impressions.
- Type-4 fingerprint records that are included for a hand must be consistent, e.g., if one or more rolled fingers for a hand are present, then the corresponding plain four-finger image must be present etc.
- The table in this Appendix describes the requirements for each of the fields in the Type 4 record.

The content and format of the Type 4 must comply with the specifications in the Data Format for the Interchange of Fingerprint Information, American National Standards Institute (ANSI/NIST ITL 1-2011) (subsequently referred to by 'NIST-2011'.) The CIC may impose additional requirements and, if so, they are identified in Value and Format in the Requirements column. If there are inter-dependencies between fields, they are included in the Requirements column.

A field type for each field is identified in the "Field" column. Use this to refer to [Appendix B.3](#) for an explanation of how to properly format the field in the NIST record.

The source of the data for each field is also identified in the first column. It is one of the following:

- **User-entered:** Value is entered by the livescan or cardscan operator.
- **Generated:** Value is generated by the scanning station software. It is never entered by the operator.
- **Hardcoded:** Value is specified by the ICD and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Hardcoded - agency-specific:** Value is specified by the CIC in coordination with the agency and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Pre-set default:** The value will be selected by the user from predetermined list of values, but a pre-specified likely value is presented to the operator by the scanning station software. The operator will select a different value if the pre-set default is not the correct value for the transaction. The value must be reset to the pre-set default before the next transaction is entered.

Important note - The value and format for each of the Type 4 fields below must comply with specifications in NIST-2011 in addition to any other constraints listed.

Field	Byte Position	Requirements
<u>Record Header (4.001)</u> Field Type: Four byte binary number Source: Generated	1 - 4	Required: Yes Value and Format: The length of this record, including this field. <ul style="list-style-type: none">• For livescans, the minimum size is 5,000 bytes.

Field	Byte Position	Requirements
<u>Information Designation Character (4.002)</u> Field Type: One byte binary number Source: Generated	5	Required: Yes Value and Format: A unique number assigned to the record. See Appendix B.4 for additional requirements.
<u>Impression Type (4.003)</u> Field Type: One byte binary code Source: Generated	6	Required: Yes Value and Format: A code describing the manner in which the fingerprint image was obtained. <ul style="list-style-type: none"> • The field value must be one of the following: <ul style="list-style-type: none"> ◦ 0 for Livescan plain impression ◦ 1 for Livescan rolled impression ◦ 2 for Cardscan plain impression ◦ 3 for Cardscan rolled impression • If a concentrator supports both livescans and cardscans, the value must be consistent with the type of scanning station that sent the transaction to the concentrator. • The value must coincide with the value of Finger Position, e.g., if the Finger Position is '2', then the Impression Type must be either '1' or '3'.

Field	Byte Position	Requirements																														
<u>Friction Ridge Generalized Position (4.004)</u> Field Type: Six binary byte codes Source: Generated	7 - 12	Required: Yes Value and Format: <ul style="list-style-type: none">This array of bytes lists the finger positions that correspond to the fingerprint image.Value of byte position 7 of this field must be one of the following finger positions:<table><tr><th>Position</th><th>Description</th></tr><tr><td>1</td><td>Right thumb</td></tr><tr><td>2</td><td>Right index finger</td></tr><tr><td>3</td><td>Right middle finger</td></tr><tr><td>4</td><td>Right ring finger</td></tr><tr><td>5</td><td>Right little finger</td></tr><tr><td>6</td><td>Left thumb</td></tr><tr><td>7</td><td>Left index finger</td></tr><tr><td>8</td><td>Left middle finger</td></tr><tr><td>9</td><td>Left ring finger</td></tr><tr><td>10</td><td>Left little finger</td></tr><tr><td>11</td><td>Plain right thumb</td></tr><tr><td>12</td><td>Plain left thumb</td></tr><tr><td>13</td><td>Plain right four fingers</td></tr><tr><td>14</td><td>Plain left four fingers</td></tr></table> <ul style="list-style-type: none">Fill all other byte positions with 255 to indicate unused.	Position	Description	1	Right thumb	2	Right index finger	3	Right middle finger	4	Right ring finger	5	Right little finger	6	Left thumb	7	Left index finger	8	Left middle finger	9	Left ring finger	10	Left little finger	11	Plain right thumb	12	Plain left thumb	13	Plain right four fingers	14	Plain left four fingers
Position	Description																															
1	Right thumb																															
2	Right index finger																															
3	Right middle finger																															
4	Right ring finger																															
5	Right little finger																															
6	Left thumb																															
7	Left index finger																															
8	Left middle finger																															
9	Left ring finger																															
10	Left little finger																															
11	Plain right thumb																															
12	Plain left thumb																															
13	Plain right four fingers																															
14	Plain left four fingers																															
<u>Image Scanning Resolution (4.005)</u> Field Type: One byte binary code Source: Generated	13	Required: Yes Value and Format: A code indicating which image scanning resolution was used. <ul style="list-style-type: none">The field value must be one of the following:<ul style="list-style-type: none">0 if half of the minimum scanning resolution is used1 if half of the native scanning resolution is used																														

Field	Byte Position	Requirements												
<u>Horizontal Line Length (4.006)</u> Field Type: Two byte binary number Source: Generated	14 - 15	Required: Yes Value and Format: <ul style="list-style-type: none"> The number of pixels in a horizontal line of pixels in the image. The maximum number depends on the type of fingerprint image as follows: <table> <tr> <th>Position</th><th>Description</th><th>Maximum Value</th></tr> <tr> <td>1 - 10</td><td>Rolled Impressions Fingers</td><td>800</td></tr> <tr> <td>11 - 12</td><td>Plain Thumb Impressions</td><td>500</td></tr> <tr> <td>13 - 14</td><td>Four Finger Plain Impressions</td><td>1600</td></tr> </table> <ul style="list-style-type: none"> The value of this field must match the corresponding value in the image data. 	Position	Description	Maximum Value	1 - 10	Rolled Impressions Fingers	800	11 - 12	Plain Thumb Impressions	500	13 - 14	Four Finger Plain Impressions	1600
Position	Description	Maximum Value												
1 - 10	Rolled Impressions Fingers	800												
11 - 12	Plain Thumb Impressions	500												
13 - 14	Four Finger Plain Impressions	1600												
<u>Vertical Line Length (4.007)</u> Field Type: Two byte binary number Source: Generated	16 - 17	Required: Yes Value and Format: <ul style="list-style-type: none"> The number of horizontal lines in the image. The maximum number depends on the type of fingerprint image as follows: <table> <tr> <th>Position</th><th>Description</th><th>Maximum Value</th></tr> <tr> <td>1 - 10</td><td>Rolled Impressions Fingers</td><td>750</td></tr> <tr> <td>11 - 12</td><td>Plain Thumb Impressions</td><td>1500</td></tr> <tr> <td>13 - 14</td><td>Four Finger Plain Impressions</td><td>1500</td></tr> </table> <ul style="list-style-type: none"> The value of this field must match the corresponding value in the image data. 	Position	Description	Maximum Value	1 - 10	Rolled Impressions Fingers	750	11 - 12	Plain Thumb Impressions	1500	13 - 14	Four Finger Plain Impressions	1500
Position	Description	Maximum Value												
1 - 10	Rolled Impressions Fingers	750												
11 - 12	Plain Thumb Impressions	1500												
13 - 14	Four Finger Plain Impressions	1500												
<u>Compression Algorithm (4.008)</u> Field Type: One byte binary code Source: Hardcoded	18	Required: Yes Value and Format: <ul style="list-style-type: none"> Specifies the algorithm used to compress the binary data. Only one algorithm, Wavelet Scalar Quantization is allowed by MCHS and the FBI/NGI system. The field value must be '1'. 												

Field	Byte Position	Requirements
<u>Image Data (4.009)</u> Field Type: Variable length binary image Source: User-entered	19 - end of record	<p>Required: Yes if the record is present. In accordance with the following:</p> <ul style="list-style-type: none"> All 10 rolled finger positions must be accounted for in the transaction so there must be either a Type-4 record with an image or an indicator in field 2.084, or both, for each of the 10 rolled finger positions. MCHS follows the FBI EBTS specification for using field 2.084 to specify partial amputation vs full amputation vs unprintable for any reason other than full amputation. Refer to Appendix A.7 for detailed explanation. <p>Value and Format: The fingerprint image that has been compressed by the WSQ compression algorithm. .</p> <ul style="list-style-type: none"> A nominal compression ratio of 15:1 is required by the FBI. Therefore, the following computation should result in a value of approximately 15: $\frac{(\text{Horizontal Line Length}) \times (\text{Vertical Line Length})}{(\text{length of this Image field})}$

12.4 A.4 TYPE 10 FACIAL IMAGE RECORD

The Type 10 record is used for facial images and images of scars, marks, and tattoos.

- TYPE 10 SMT Image RECORDS ARE NOT ALLOWED
- Type 10 records are only allowed in ARR transactions and are optional.
- Type 10 records are currently not allowed in APP or DOC transactions.
- The facial photo must be compressed using JPEG 2000 compression software. Also, any image manipulation (e.g., cropping) must be done before the image is compressed.
- The facial photo image must contain a face.
- In a transaction, there may be up to three Type 10 records with facial images (typically frontal without glasses, left profile and right profile) at least one frontal image is required.
- The facial images must follow Subject Acquisition Profile (SAP) Level 40 (Higher Resolution Mugshot) or Level 42 (Mobile device higher resolution mugshot) requirements and guidelines. Within a transaction, all facial image records must be the same SAP level. **SAP Level 40 is preferred since it is useful for facial recognition.**
- The table in this Appendix describes the requirements for each of the fields in the Type 10 record.

The content and format of the Type 10 must comply with the specifications in the Data Format for the Interchange of Fingerprint Information, American National Standards Institute (ANSI/NIST ITL 1-2011) (subsequently referred to by 'NIST-2011'.) The CIC may impose additional requirements and, if so, they are identified in Value and Format in the Requirements column. If there are inter-dependencies between fields, they are included in the Requirements column.

A field type for each field is identified in the "Field" column. Use this to refer to [Appendix B.2](#) for an explanation of how to properly format the field in the NIST record.

The source of the data for each field is also identified in the first column. It is one of the following:

- User-entered:** Value is entered by the livescan or cardscan operator.

- **Generated:** Value is generated by the scanning station software. It is never entered by the operator.
- **Hardcoded:** Value is specified by the ICD and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Hardcoded - agency-specific:** Value is specified by the CIC in coordination with the agency and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- **Pre-set default:** The value will be selected by the user from predetermined list of values, but a pre-specified likely value is presented to the operator by the scanning station software. The operator will select a different value if the pre-set default is not the correct value for the transaction. The value must be reset to the pre-set default before the next transaction is entered.

Important note - The value and format for each of the Type 10 fields below must comply with specifications in NIST-2011 in addition to any other constraints listed.

Field	Requirements
10.001 <u>Record Header</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: The length specified in this field includes this field.
10.002 <u>Information Designation Character (IDC)</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • A unique number assigned to the record. • See Appendix B.4 for additional requirements.
10.003 <u>Image Type</u> Field Type: Simple non-repeating Source: User-entered	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Value must be 'FACE'.
10.004 <u>Source Agency ORI</u> Field Type: Simple non-repeating Source: Generated - populate with same value as 1.07 Print Agency ORI	Required: Yes Occurrences: 1 Value and Format: Value must be same as value in field 1.07 Print Agency.
10.005 <u>Photo Capture Date</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none"> • For livescans: Generated • For cardscans: User-entered 	Required: Yes Occurrences: 1 Value and Format: Value must be less than or equal to the current date.

Field	Requirements								
10.006 <u>Horizontal Line Length</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> For facial images, the minimum value depends on the 10.013 Subject Acquisition Level SAP Level as follows: <table> <tr> <th>SAP Level</th><th>Minimum Value</th></tr> <tr> <td>40, 42</td><td>768</td></tr> </table>	SAP Level	Minimum Value	40, 42	768				
SAP Level	Minimum Value								
40, 42	768								
10.007 <u>Vertical Line Length</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> For facial images, the minimum value depends on the 10.013 Subject Acquisition Profile SAP Level as follows: <table> <tr> <th>SAP Level</th><th>Minimum Value</th></tr> <tr> <td>40, 42</td><td>1024</td></tr> </table> <ul style="list-style-type: none"> For facial images, the aspect ratio (HLL/VLL) depends on the 10.013 Subject Acquisition Profile SAP Level as follows: <table> <tr> <th>SAP Level</th><th>Aspect Ratio</th></tr> <tr> <td>40, 42</td><td>3:4 (0.75)</td></tr> </table>	SAP Level	Minimum Value	40, 42	1024	SAP Level	Aspect Ratio	40, 42	3:4 (0.75)
SAP Level	Minimum Value								
40, 42	1024								
SAP Level	Aspect Ratio								
40, 42	3:4 (0.75)								
10.008 <u>Scale Units</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: Value must be '1' or '2'.								
10.009 <u>Transmitted Horizontal Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: Value must be in the range 1 through 99999.								
10.010 <u>Transmitted Vertical Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> Value must be in the range 1 through 99999. For facial images, the pixel aspect ratio (thps/tvps) must be 1:1. 								

Field	Requirements						
10.011 <u>Compression Algorithm</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: For facial images, the allowable compression algorithms depend on the 10.013 Subject Acquisition Profile SAP Level as follows: <table border="1"> <thead> <tr> <th>SAP Level</th><th>Valid Values</th></tr> </thead> <tbody> <tr> <td>40, 42</td><td>JP2, JP2L</td></tr> </tbody> </table> <ul style="list-style-type: none"> For SAP Level 40, at least one frontal facial image must be compressed using JP2L. 	SAP Level	Valid Values	40, 42	JP2, JP2L		
SAP Level	Valid Values						
40, 42	JP2, JP2L						
10.012 <u>Color Space</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> For facial images, the allowable color spaces depend on the 10.013 Subject Acquisition Profile SAP Level as follows: <table border="1"> <thead> <tr> <th>SAP Level</th><th>Valid Values</th></tr> </thead> <tbody> <tr> <td>40, 42</td><td>SRGB</td></tr> </tbody> </table>	SAP Level	Valid Values	40, 42	SRGB		
SAP Level	Valid Values						
40, 42	SRGB						
10.013 <u>Subject Acquisition Profile</u> Field Type: Simple non-repeating Source: User-entered or Generated	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> Must be one of the following SAP Levels: <table border="1"> <thead> <tr> <th>SAP Level</th><th>Description</th></tr> </thead> <tbody> <tr> <td>40</td><td>Higher Resolution Mugshot</td></tr> <tr> <td>42</td><td>Mobile Device Higher Resolution Mugshot</td></tr> </tbody> </table> (Ref. NIST-2011, Table 12.) <ul style="list-style-type: none"> A value of '40' requires that each of the following fields be present and populated. (Cross-field validation): 10.023, 10.026, 10.027, 10.028 	SAP Level	Description	40	Higher Resolution Mugshot	42	Mobile Device Higher Resolution Mugshot
SAP Level	Description						
40	Higher Resolution Mugshot						
42	Mobile Device Higher Resolution Mugshot						
10.016 <u>Scanned Horizontal Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: Value must be in the range 1 through 99999.						
10.017 <u>Scanned Vertical Picture Scale</u> Field Type: Simple non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: Value must be in the range 1 through 99999.						

Field	Requirements
10.018 <u>Distortion</u> Field Type: Group non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: <ul style="list-style-type: none"> Distortion Code, Distortion Measurement Code, and Distortion Severity Code must be populated.
Distortion Code	Value and Format: Value must be 'Barrel', 'Inflated', or 'Pincushion'.
Distortion Measurement Code	Value and Format: Value must be 'E' or 'C'.
Distortion Severity Code	Value and Format: Value must be 'Mild', 'Moderate', or 'Severe'.
10.019 <u>Lighting Artifacts</u> Field Type: Simple repeating Source: User-entered	Required: No Occurrences: Maximum 3 Value and Format: Value must be 'F', 'H', or 'R'.
10.020 <u>Subject Pose</u> Field Type: Simple non-repeating Source: User-entered or Generated	Required: No Occurrences: 1 Value and Format: Must comply with specifications in NIST-2011, including the valid subject pose code values in Table 73. <ul style="list-style-type: none"> A value of 'A' requires that field 10.021 be present and populated. (Cross-field validation) A value of 'D' requires that field 10.025 be present and populated. (Cross-field validation) There must be at least one record with a frontal pose in the transaction. That record must be one of: <ul style="list-style-type: none"> Subject Pose of 'F', or Subject Pose of 'D' with Subject Pose Angles (10.025) Yaw, Pitch, and Roll of 0, 0, and 0. Subject Pose of 'A' with Pose Offset Angle 0.
10.021 <u>Pose Offset Angle</u> Field Type: Simple non-repeating Source: User-entered or Generated	Required: Must be present if field 10.020 Subject Pose has the value 'A'. The field should not be present if field 10.020 has a value other than 'A'. Occurrences: 1 Value and Format: Value must be in the range -180 through +180.

Field	Requirements
10.023 <u>Photo Acquisition Source</u> Field Type: Group non-repeating Source: Hardcoded	Required: Must be present if field 10.013 Subject Acquisition Profile has the value '40' or greater. Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Photo Attribute Code must be present and populated. • If Photo Attribute Code is 'VENDOR', Description must be populated in each occurrence. • If Photo Attribute Code is any other value, Vendor-specific Description must be null.
Photo Attribute Code	Value and Format: Must comply with specifications in NIST-2011, including the valid subject acquisition source type attribute code values in Table 74.
Vendor-Specific Description	Required: Must be present if Photo Attribute Code is 'VENDOR'. Value and Format: Length: Maximum 7
10.024 <u>Subject Quality Scores</u> Field Type: Group repeating Source: Generated	Required: No Occurrences: Maximum 9 Value and Format: <ul style="list-style-type: none"> • Quality Value, Algorithm Vendor Identification, and Algorithm Product Identification must be populated in each occurrence.
Quality Value	Value and Format: Value must be in the range 0 through 255.
Algorithm Vendor Identification	Value and Format: Value must be 4-character hexadecimal.
Algorithm Product Identification	Value and Format: Value must be in the range 1 through 65535.
10.025 <u>Subject Pose Angles</u> Field Type: Group non-repeating Source: User-entered or Generated	Required: <ul style="list-style-type: none"> • Must be present if field 10.020 Subject Pose has the value 'D'. • The field should not be present if field 10.020 has a value other than 'D'. Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Yaw Angle, Pitch Angle, and Roll Angle must be present and populated. • If any of Yaw Uncertainty, Pitch Uncertainty, and Roll Uncertainty is present, then all three fields must be present and populated.
Yaw Angle	Value and Format: Value must be in the range -180 through +180.
Pitch Angle	Value and Format: Value must be in the range -180 through +180.

Field	Requirements
Roll Angle	Value and Format: Value must be in the range -90 through +90.
Uncertainty in Degrees for Yaw	Value and Format: Value must be in the range 0 through 90.
Uncertainty in Degrees for Pitch	Value and Format: Value must be in the range 0 through 90.
Uncertainty in Degrees for Roll	Value and Format: Value must be in the range 0 through 90.
10.026 <u>Subject Facial Description</u> Field Type: Simple repeating Source: User-entered	Required: Must be present if field 10.013 Subject Acquisition Profile has the value '40' or greater. Occurrences: Maximum 50 Value and Format: <ul style="list-style-type: none"> • Must comply with specifications in NIST-2011, including the valid subject facial description attribute code values in Table 75. • Length: Maximum 20
10.027 <u>Subject Eye Color</u> Field Type: Simple non-repeating Source: Generated - populate with ANSI-NIST Code for field in 2.031	Required: Must be present if field 10.013 Subject Acquisition Profile has the value '40' or greater. Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Must comply with specifications in NIST-2011, including the valid eye color attribute code values in Table 29. • The value in this field must correspond to the value in the Type 2 record field 2.031.
10.028 <u>Subject Hair Color</u> Field Type: Simple repeating Source: User entered or Generated - populate with ANSI-NIST Code for field in 2.032	Required: Must be present if field 10.013 Subject Acquisition Profile has the value '40' or greater. Occurrences: 1, except for one case - see below Value and Format: Must comply with specifications in NIST-2011, including the valid hair color attribute code values in Table 76. <ul style="list-style-type: none"> • If the value of the first occurrence is 'BAL' or 'STR', a second occurrence may be included. The value of the second occurrence must be any valid attribute code except the value in the first occurrence. • The value in this field must correspond to the value in the Type 2 record field 2.032. If field 10.028 has two occurrences, then one of the two occurrences must correspond to the value in field 2.032.
10.029 <u>2D Facial Feature Points</u> Field Type: Group repeating Source: User entered or Generated	Required: No Occurrences: Maximum 88 Value and Format: <ul style="list-style-type: none"> • Feature Point Type, Feature Point Code, X Coordinate, and Y Coordinate must be populated in each occurrence.
Feature Point Type	Value and Format: Value must be '1' or '2'.

Field	Requirements
Feature Point Code	Value and Format: <ul style="list-style-type: none"> If Feature Point Type is '1', value must be in the format A.B where the value of A is in the range 1 through 15 and the value of B is in the range 1 through 15. If Feature Point Type is '2', value must be a valid anthropometric landmark feature point id in NIST-2011 Table 78.
X Coordinate	Value and Format: <ul style="list-style-type: none"> Value must be in the range 1 through 99999. Value must be less than or equal to value of hll.
Y Coordinate	Value and Format: <ul style="list-style-type: none"> Value must be in the range 1 through 99999. Value must be less than or equal to value of vll.
10.030 <u>Device Monitoring Mode</u> Field Type: Simple non-repeating Source: User entered or Hardcoded	Required: No Occurrences: 1 Value and Format: Must comply with specifications in NIST-2011, including the valid device monitoring mode condition values in Table 6.
10.031 <u>Tiered Markup Collection</u> Field Type: Simple non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: Must comply with specifications in NIST-2011, including the valid tiered markup collection values in Table 79. <ul style="list-style-type: none"> A value of '5' requires that field 10.033 be present and populated. (Cross-field validation)
10.033 <u>Feature Contours</u> Field Type: Group non-repeating Source: Generated	Required: Must be present if field 10.031 Tiered Markup Collection has the value '5'. Occurrences: 12 Value and Format: <ul style="list-style-type: none"> Feature Contour Code, Number of Points, Horizontal Point Offset, and Vertical Point Offset must be populated in each occurrence. Horizontal Point Offset and Vertical Point Offset must occur a minimum of three times, in pairs, up to a maximum that is the value indicated in Number of Points.
Feature Contour Code	Value and Format: Must comply with specifications in NIST-2011, including the valid feature contour code values in Table 30.

Field	Requirements
Number of Points	Value and Format: <ul style="list-style-type: none"> Value must be the number of occurrences of hpo-vpo pairs. Must be a minimum of three points.
Horizontal Point Offset	Occurrences: Number of hpo-vpo pairs must be the number specified in nop. See Requirements for Feature Contours. Value and Format: <ul style="list-style-type: none"> Horizontal and Vertical Point Offset are provided in pairs. Value must be in the range 0 through 10.006 Horizontal Line Length (hll) value.
Vertical Point Offset	Occurrences: Number of hpo-vpo pairs must be the number specified in nop. See Requirements for Feature Contours. Value and Format: <ul style="list-style-type: none"> Value must be in the range 0 through 10.007 Vertical Line Length (vll) value.
10.038 <u>Comment</u> Field Type: Simple non-repeating Source: User-entered	Required: No Occurrences: 1 Value and Format: Length: Maximum 126.
10.039 <u>Type-10 Reference Number</u> Field Type: Simple non-repeating Source: User-entered or Generated	Required: No Occurrences: 1 Value and Format: Value must be in the range 0 through 255.
10.044 <u>Image Transform</u> Field Type: Simple repeating Source: User-entered	Required: No Occurrences: Maximum 18 Value and Format: Must comply with specifications in NIST-2011, including the valid image transform values in Table 82.
10.045 <u>Occlusions</u> Field Type: Group repeating Source: User entered	Required: No Occurrences: Maximum 16 Value and Format: <ul style="list-style-type: none"> Occlusion Opacity, Type, Number of Points, Horizontal Point Offset, and Vertical Point Offset must be present and populated. Horizontal Point Offset and Vertical Point Offset must occur a minimum of three times, in pairs, up to a maximum that is the value indicated in Number of Points.
Occlusion Opacity	Value and Format: Must comply with specifications in NIST-2011, including the valid occlusion opacity code values in Table 32

Field	Requirements
Occlusion Type	Value and Format: Must comply with specifications in NIST-2011, including the valid occlusion type code values in Table 33.
Number of Points	Value and Format: <ul style="list-style-type: none"> Value must be the number of occurrences of hpo-vpo pairs. Must be a minimum of three points.
Horizontal Point Offset	Occurrences: Number of hpo-vpo pairs must be the number specified in nop. See Requirements for Occlusions. Value and Format: <ul style="list-style-type: none"> Horizontal and Vertical Point Offset are provided in pairs. Value must be in the range 0 through the 10.006 Horizontal Line Length (hll) value.
Vertical Point Offset	Occurrences: Number of hpo-vpo pairs must be the number specified in nop. See Requirements for Occlusions. Value and Format: <ul style="list-style-type: none"> Value must be in the range 0 through the 10.007 Vertical Line Length (vll) value.
10.902 <u>Annotation Information</u> Field Type: Group repeating Source: Generated/Hardcoded/User entered	Required: No Occurrences: Maximum 100 Value and Format: <ul style="list-style-type: none"> Annotation GMT, Processing Algorithm Name Version, Algorithm Owner, and Process Description must be populated in each occurrence.
Greenwich Mean Time	Value and Format: Must be in the format YYYYMMDDhhmmssZ.
Processing Algorithm Name Version	Value and Format: Length: Maximum 64
Algorithm Owner	Value and Format: Length: Maximum 64
Process Description	Value and Format: Length: Maximum 255
10.903 Device Unique Identifier Field Type: Simple non-repeating Source: Hardcoded	Required: No Occurrences: 1 Value and Format: <ul style="list-style-type: none"> Must comply with specifications in NIST-2011, including the valid tiered markup collections hexadecimal values in Table 128. The first character must be 'M' or 'P'.

Field	Requirements
10.904 <u>Make Model Serial Number</u> Make, Model, and Serial Number of device that was used to capture the facial image Field Type: Group non-repeating Source: Hardcoded	Required: No Occurrences: 1 Value and Format: Make, Model, and Serial Number must be present and populated.
Make	Value and Format: Length: Maximum 50
Model	Value and Format: Length: Maximum 50
Serial Number	Value and Format: Length: Maximum 50
10.993 <u>Source Agency Name</u> Field Type: Simple non-repeating Source: User entered or Generated	Required: No Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Could be obtained from description in Agency edit table using Source Agency ORI. • Length: Maximum 125
10.996 <u>Hash</u> Field Type: Simple non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: Must be 64-character hexadecimal.
10.998 <u>Geographic Sample Acquisition Location</u> Field Type: Group non-repeating Source: User entered	Required: No Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • If either of Latitude Degree Value and Longitude Degree value is present, then both fields must be present and populated. • If any of Geographic Coordinate Universal Traverse Mercator Zone, Easting, and Northing is present, then all fields must be present and populated.
Universal Time Entry	Value and Format: Must be in the format YYYYMMDDhhmmssZ.
Latitude Degree Value	Value and Format: <ul style="list-style-type: none"> • Value must be in the range -90 through 90. • May be integer or decimal. • If this field contains a decimal value, then Latitude Minute Value and Latitude Second Value must not be populated.

Field	Requirements
Latitude Minute Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Latitude Degree Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal. • If this field contains a decimal value, then Latitude Second Value must not be populated.
Latitude Second Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Latitude Minute Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal.
Longitude Degree Value	Value and Format: <ul style="list-style-type: none"> • Value must be in the range -180 through 180. • May be integer or decimal. • If this field contains a decimal value, then Longitude Minute Value and Longitude Second Value must not be populated.
Longitude Minute Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Longitude Degree Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal. • If this field contains a decimal value, then Longitude Second Value must not be populated.
Longitude Second Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Longitude Minute Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal.
Elevation	Value and Format: <ul style="list-style-type: none"> • Value must be in the range -422.000 through 8848.000. • May be integer or decimal.
Geodetic Datum Code	Value and Format: Must comply with specifications in NIST-2011, including the valid datum code values in Table 7. <ul style="list-style-type: none"> • Value must be 3 to 6 character hexadecimal.
Geographic Coordinate Universal Traverse Mercator Zone	Value and Format: <ul style="list-style-type: none"> • Must be a valid UTM Zone with one or two digits followed by a single letter.
Geographic Coordinate Universal Traverse Mercator Easting	Value and Format: Value must be one to six digits.
Geographic Coordinate Universal Traverse Mercator Northing	Value and Format: Value must be one to eight digits.

Field	Requirements									
Geographic Reference Text	Value and Format: Length: Maximum 150									
Geographic Coordinate Other System Identifier	Value and Format: <ul style="list-style-type: none">If this field is present, Geographic Coordinate Other System Value must be present and populated.Length: Maximum 10									
Geographic Coordinate Other System Value	Value and Format: <ul style="list-style-type: none">If this field is present, Geographic Coordinate Other System Identifier must be present and populated.Length: Maximum 126									
10.999 <u>Body Part Image</u> Field Type: Variable length binary image Source: Generated	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none">The CIC specifies a nominal compression ratio of 15:1 for lossy and 2:1 for lossless.For facial images, the minimum and maximum size depends on the 10.013 Subject Acquisition Profile SAP Level as follows: <table><tr><th>SAP Level</th><th>Minimum bytes</th><th>Maximum bytes</th></tr><tr><td>40, 42 (lossless frontal only)</td><td>589,824</td><td>3,000,000</td></tr><tr><td>40, 42 (lossy profile only)</td><td>56,000</td><td>384,000</td></tr></table>	SAP Level	Minimum bytes	Maximum bytes	40, 42 (lossless frontal only)	589,824	3,000,000	40, 42 (lossy profile only)	56,000	384,000
SAP Level	Minimum bytes	Maximum bytes								
40, 42 (lossless frontal only)	589,824	3,000,000								
40, 42 (lossy profile only)	56,000	384,000								

12.5 A.5 TYPE 14 VARIABLE RESOLUTION FINGERPRINT IMAGE RECORD

The Type 14 record is used to provide 4-4-2 slap fingerprint impressions for Applicant transactions to MCHS. MCHS does not currently support use of the Type 14 to provide the full fingerprint set.

- A scanning station must not allow a transaction to be sent to MCHS unless each field validates against the requirements in this section.
- The fingerprint image must
 - Be captured using an FBI-approved scanner
 - Be compressed using FBI-approved compression software. Also, any image manipulation (e.g., cropping) must be done before the image is compressed.

The content and format of the Type 14 must comply with the specifications in the [Data Format for the Interchange of Fingerprint Information, American National Standards Institute \(ANSI/NIST ITL 1-2011: Update 2015\)](#).

When submitting Type 14 records, the Type 2 AMP field should be used to indicate when there is an image missing (e.g., entire slap). The Type 14 AMP field should be used to indicate a missing finger when within an image (e.g., a missing index finger in a slap image).

Type 14 also complies with the implementation as specified in [FBI EBTS Version 10.0.8, September 30, 2017](#).

The CIC may impose additional requirements.

The table in this Appendix describes the required fields in the Type 14 and any fields with MCHS specific requirements. Things to note in the table include:

- A field type for each field is identified in the "Field" column. Use this to refer to [Appendix B.3](#) for an explanation of how to properly format the field in the NIST record.
- The source of the data for each field is also identified in the first column. It is one of the following:
 - User-entered. Value is entered by the livescan or cardscan operator.
 - Generated. Value is generated by the scanning station software. It is never entered by the operator.
 - Hardcoded. Value is specified by the ICD and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
 - Hardcoded - agency-specific. Value is specified by the CIC in coordination with the agency and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
 - Pre-set default. The value will be selected by the user from predetermined list of values, but a pre-specified likely value is presented to the operator by the scanning station software. The operator will select a different value if the pre-set default is not the correct value for the transaction. The value must be reset to the pre-set default before the next transaction is entered.
- Additional CIC requirements are identified in the MCHS Specific Requirements column

Important note - The value and format for each of the Type 14 fields below must comply with specifications in NIST-2011 in addition to any other constraints listed.

Field	MCHS Specific Requirements
14.001 <u>Record Header</u> Field Type: Simple non-repeating Source: Generated	
14.002 <u>Information Designation Character (IDC)</u> Field Type: Simple non-repeating Source: Generated	Value and Format: See Appendix B.4 for additional requirements.
14.003 <u>Impression Type</u> Field Type: Simple non-repeating Source: Generated	Value and Format: The field value will be 0 Plain Contact
14.004 <u>Source Agency ORI</u> Field Type: Simple non-repeating Source: Generated - populate with same value as 1.07 Print Agency ORI	Value and Format: Value must be same as value in field 1.07 Print Agency.
14.005 <u>Fingerprint Capture Date</u> Field Type: Simple non-repeating Source: Generated	Value and Format: Value must be less than or equal to the current date.

Field	MCHS Specific Requirements								
14.006 <u>Horizontal Line Length</u> Field Type: Simple non-repeating Source: Generated									
14.007 <u>Vertical Line Length</u> Field Type: Simple non-repeating Source: Generated									
14.008 <u>Scale Units</u> Field Type: Simple non-repeating Source: Generated	Value and Format: Value must be '1' or '2'.								
14.009 <u>Transmitted Horizontal Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	Value and Format: Value must be 500 or 1000								
14.010 <u>Transmitted Vertical Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	Value and Format: Value must be 500 or 1000								
14.011 <u>Compression Algorithm</u> Field Type: Simple non-repeating Source: Generated	Value and Format: Must be 'WSQ20' for 500 ppi and 'JP2' for 1000 ppi								
14.012 <u>Bits per Pixel</u> Field Type: Simple non-repeating Source: Generated									
14.013 <u>Friction Ridge Generalized Position</u> Field Type: Simple repeating Source: User-entered	Value must be one of the following positions: <table border="1"> <thead> <tr> <th>Position</th><th>Description</th></tr> </thead> <tbody> <tr> <td>13</td><td>Plain right four fingers</td></tr> <tr> <td>14</td><td>Plain left four fingers</td></tr> <tr> <td>15</td><td>Left and Right thumbs</td></tr> </tbody> </table> <ul style="list-style-type: none"> Cannot have more than one record for the same code. 	Position	Description	13	Plain right four fingers	14	Plain left four fingers	15	Left and Right thumbs
Position	Description								
13	Plain right four fingers								
14	Plain left four fingers								
15	Left and Right thumbs								
14.018 <u>Amputated or Bandaged</u> Field Type: Group non-repeating Source: User-entered	Required: In accordance with the following: <ul style="list-style-type: none"> MCHS follows the FBI EBTS specification for using field 14.018 to specify partial amputation vs full amputation vs unprintable for any reason other than full amputation. 								

Field	MCHS Specific Requirements																						
Friction Ridge Amputated or Bandaged Position	<p>Length: Maximum 2</p> <p>Characters: N</p> <p>Value and Format: Must be one of the following values:</p> <table> <tr> <th>Position</th><th>Description</th></tr> <tr><td>1</td><td>Right thumb</td></tr> <tr><td>2</td><td>Right index finger</td></tr> <tr><td>3</td><td>Right middle finger</td></tr> <tr><td>4</td><td>Right ring finger</td></tr> <tr><td>5</td><td>Right little finger</td></tr> <tr><td>6</td><td>Left thumb</td></tr> <tr><td>7</td><td>Left index finger</td></tr> <tr><td>8</td><td>Left middle finger</td></tr> <tr><td>9</td><td>Left ring finger</td></tr> <tr><td>10</td><td>Left little finger</td></tr> </table>	Position	Description	1	Right thumb	2	Right index finger	3	Right middle finger	4	Right ring finger	5	Right little finger	6	Left thumb	7	Left index finger	8	Left middle finger	9	Left ring finger	10	Left little finger
Position	Description																						
1	Right thumb																						
2	Right index finger																						
3	Right middle finger																						
4	Right ring finger																						
5	Right little finger																						
6	Left thumb																						
7	Left index finger																						
8	Left middle finger																						
9	Left ring finger																						
10	Left little finger																						
Amputated or Bandaged Code	<p>Value and Format:</p> <ul style="list-style-type: none"> Value must be one of the following <ul style="list-style-type: none"> UP for Fully amputated or otherwise unprintable XX for Partially amputated 																						
14.999 <u>Fingerprint Image</u> Field Type: Variable length binary image Source: Generated	<p>Value and Format:</p> <ul style="list-style-type: none"> The FBI EBTS specifies a nominal compression ratio of 15:1. Therefore, the following computation should result in a value of approximately 15: (Horizontal Line Length) x (Vertical Line Length) / (length of this image data field) The minimum size is 5,000 bytes and the maximum size is 2,000,000 bytes. 																						

12.6 A.6 TYPE 15 VARIABLE-RESOLUTION PALM PRINT IMAGE RECORD

The Type 15 record is used for palm print images.

- Type 15 records are allowed and optional in ARR transactions.
- Type 15 records are allowed and optional in DOC transactions.
- Type 15 records are allowed and optional in APP for SOR transactions.
- Palm print images must be 500 ppi.
- The palm print image must be compressed using FBI-approved WSQ compression software. Also, any image manipulation (e.g., cropping) must be done before the image is compressed.
- Either full palms or upper/lower pairs are accepted from livescans. **Full palms are preferred.**
- Either full palms or upper/lower pairs are accepted from livescans. Support for **BOTH full palms and upper/lower pairs are preferred.**

- For each hand, either the full palm and writer's palm or an upper/lower palm pair and the writer's palm are required.
- In accordance with the FBI's "A Practical Guide for Palm Print Capture", the palm impressions must be stored in a Type 15 record in a North/South position. Therefore, if a palm position is collected sideways, the scanning station must rotate the image before including it in a Type 15 record.
- The palm prints must be captured in accordance with the FBI's "A Practical Guide for Palm Print Capture", available on fbibiospecs.org website. Note that a full palm and an upper palm must include all fingers, including the distal of each finger.
- For cardscans, only the palm impressions are used. Therefore, only the images on the front of the FBI Standard Palm Print Card FD-884 are to be scanned and included in the tenprint transaction.
- If any Type 15 records are included in the transaction, there must be a Type 15 record for each palm position. The requirements for fields 15.018 and 15.999 to specify a partial amputation, a full amputation, and an otherwise unprintable palm position are in [Appendix A.7](#)
- The table in this appendix describes the requirements for each of the fields in the Type 15 record.

The content and format of the Type 15 must comply with the specifications in the Data Format for the Interchange of Fingerprint Information, American National Standards Institute (ANSI/NIST ITL 1-2011) (subsequently referred to by 'NIST-2011'.) The CIC may impose additional requirements and, if so, they are identified in Value and Format in the Requirements column. If there are interdependencies between fields, they are included in the Requirements column.

A field type for each field is identified in the "Field" column. Use this to refer to [Appendix B.2](#) for an explanation of how to properly format the field in the NIST record.

The source of the data for each field is also identified in the first column. It is one of the following:

- User-entered. Value is entered by the livescan or cardscan operator.
- Generated. Value is generated by the scanning station software. It is never entered by the operator.
- Hardcoded. Value is specified by the ICD and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- Hardcoded - agency-specific. Value is specified by the CIC in coordination with the agency and is hardcoded by the vendor when the scanning station is installed. It is never entered by the operator.
- Pre-set default. The value will be selected by the user from predetermined list of values, but a pre-specified likely value is presented to the operator by the scanning station software. The operator will select a different value if the pre-set default is not the correct value for the transaction. The value must be reset to the pre-set default before the next transaction is entered.

Also see [Section 9](#) for the requirements to print palm prints on the livescan printer in an FBI Palm Print Card FD-884 card format.

Important note - The value and format for each of the Type 15 fields below must comply with specifications in NIST-2011 in addition to any other constraints listed.

Field	Requirements
15.001 <u>Record Header</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: The length specified in this field includes this field.
15.002 <u>Information Designation Character (IDC)</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: A unique number assigned to the record. <ul style="list-style-type: none"> • See Appendix B.4 for additional requirements.

Field	Requirements
15.003 <u>Impression Type</u> Field Type: Simple non-repeating Source: Generated	Required: Yes Occurrences: 1 Value and Format: Must comply with specifications in NIST-2011, including valid palm impression type codes on Table 11. <ul style="list-style-type: none"> • The field value must be one of the following: <ul style="list-style-type: none"> ◦ 10 for a Livescan palm ◦ 11 for a Non-livescan palm • The value must be '10' for a livescan. • The value must be '11' for a cardscan. • If a concentrator supports both livescans and cardscans, the value must be consistent with the type of scanning station that sent the transaction to the concentrator.
15.004 <u>Source Agency ORI</u> Field Type: Simple non-repeating Source: Generated - populate with same value as 1.07 Print Agency ORI	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Value must be same as value in field 1.07 Print Agency.
15.005 <u>Palmpoint Capture Date</u> Field Type: Simple non-repeating Source: <ul style="list-style-type: none"> • For livescans: Generated • For cardscans: User-entered 	Required: Yes Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • Value must be less than or equal to the current date.

Field	Requirements																		
15.006 <u>Horizontal Line Length</u> Field Type: Simple non-repeating Source: Generated	<p>Required: Required if an image (field 15.999) is included in the record. Must not be present if there is no image.</p> <p>Occurrences: 1</p> <p>Value and Format:</p> <ul style="list-style-type: none"> The maximum value depends on the palm position and is determined based on the Friction Ridge Generalized Position (palm positions) in field 15.013 and dimensions in Table 8 in NIST-2011 as follows: <table> <tr> <th>Palm Position</th><th>Maximum Value</th></tr> <tr> <td>21</td><td>2750</td></tr> <tr> <td>22</td><td>900</td></tr> <tr> <td>23</td><td>2750</td></tr> <tr> <td>24</td><td>900</td></tr> <tr> <td>25</td><td>2750</td></tr> <tr> <td>26</td><td>2750</td></tr> <tr> <td>27</td><td>2750</td></tr> <tr> <td>28</td><td>2750</td></tr> </table> <ul style="list-style-type: none"> The value of this field must match the corresponding value in the image data. 	Palm Position	Maximum Value	21	2750	22	900	23	2750	24	900	25	2750	26	2750	27	2750	28	2750
Palm Position	Maximum Value																		
21	2750																		
22	900																		
23	2750																		
24	900																		
25	2750																		
26	2750																		
27	2750																		
28	2750																		

Field	Requirements																		
15.007 <u>Vertical Line Length</u> Field Type: Simple non-repeating Source: Generated	<p>Required: Required if an image (field 15.999) is included in the record. Must not be present if there is no image.</p> <p>Occurrences: 1</p> <p>Value and Format:</p> <ul style="list-style-type: none"> The maximum value depends on the palm position and is determined based on the Friction Ridge Generalized Position (palm positions) in field 15.013 and dimensions in Table 8 in NIST-2011 as follows: <table border="1"> <thead> <tr> <th>Palm Position</th><th>Maximum Value</th></tr> </thead> <tbody> <tr><td>21</td><td>4250</td></tr> <tr><td>22</td><td>2500</td></tr> <tr><td>23</td><td>4250</td></tr> <tr><td>24</td><td>2500</td></tr> <tr><td>25</td><td>2750</td></tr> <tr><td>26</td><td>2750</td></tr> <tr><td>27</td><td>2750</td></tr> <tr><td>28</td><td>2750</td></tr> </tbody> </table> <ul style="list-style-type: none"> The value of this field must match the corresponding value in the image data. 	Palm Position	Maximum Value	21	4250	22	2500	23	4250	24	2500	25	2750	26	2750	27	2750	28	2750
Palm Position	Maximum Value																		
21	4250																		
22	2500																		
23	4250																		
24	2500																		
25	2750																		
26	2750																		
27	2750																		
28	2750																		
15.008 <u>Scale Units</u> Field Type: Simple non-repeating Source: Generated	<p>Required: Required if an image (field 15.999) is included in the record. Must not be present if there is no image.</p> <p>Occurrences: 1</p> <p>Value and Format: Value must be '1' or '2'.</p>																		
15.009 <u>Transmitted Horizontal Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	<p>Required: Required if an image (field 15.999) is included in the record. Must not be present if there is no image.</p> <p>Occurrences: 1</p> <p>Value and Format: Value must be in the range 1 through 99999.</p>																		
15.010 <u>Transmitted Vertical Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	<p>Required: Required if an image (field 15.999) is included in the record. Must not be present if there is no image.</p> <p>Occurrences: 1</p> <p>Value and Format: Value must be in the range 1 through 99999.</p>																		
15.011 <u>Compression Algorithm</u> Field Type: Simple non-repeating Source: Generated	<p>Required: Required if an image (field 15.999) is included in the record. Must not be present if there is no image.</p> <p>Occurrences: 1</p> <p>Value and Format: Must be 'WSQ20'. (Ref. NIST-2011, Table 15.)</p>																		
15.012 <u>Bits per Pixel</u> Field Type: Simple non-repeating Source: Generated	<p>Required: Required if an image (field 15.999) is included in the record. Must not be present if there is no image.</p> <p>Occurrences: 1</p> <p>Value and Format: Value must be in the range 8 through 99.</p>																		

Field	Requirements																		
15.013 <u>Friction Ridge Generalized Position</u> Field Type: Simple non-repeating Source: User-entered	Required: Yes Occurrences: 1 Value and Format: Must comply with specifications in NIST-2011, including the valid palm code values in Table 8. <ul style="list-style-type: none"> Value must be one of the following palm positions: <table> <tr> <th>Position</th><th>Description</th></tr> <tr> <td>21</td><td>Right Full Palm</td></tr> <tr> <td>22</td><td>Right Writer's Palm</td></tr> <tr> <td>23</td><td>Left Full Palm</td></tr> <tr> <td>24</td><td>Left Writer's Palm</td></tr> <tr> <td>25</td><td>Right Lower Palm</td></tr> <tr> <td>26</td><td>Right Upper Palm</td></tr> <tr> <td>27</td><td>Left Lower Palm</td></tr> <tr> <td>28</td><td>Left Upper Palm</td></tr> </table> <ul style="list-style-type: none"> See first page of this appendix for requirements with regard to required palm image sets. Can include either a full palm or an upper/lower pair but not both. If one of a pair is included, then both upper and lower palm prints must be included in the transaction. Cannot have more than one record for the same palm code. 	Position	Description	21	Right Full Palm	22	Right Writer's Palm	23	Left Full Palm	24	Left Writer's Palm	25	Right Lower Palm	26	Right Upper Palm	27	Left Lower Palm	28	Left Upper Palm
Position	Description																		
21	Right Full Palm																		
22	Right Writer's Palm																		
23	Left Full Palm																		
24	Left Writer's Palm																		
25	Right Lower Palm																		
26	Right Upper Palm																		
27	Left Lower Palm																		
28	Left Upper Palm																		
15.016 <u>Scanned Horizontal Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: Value must be in the range 1 through 99999.																		
15.017 <u>Scanned Vertical Pixel Scale</u> Field Type: Simple non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: Value must be in the range 1 through 99999.																		

Field	Requirements
15.018 <u>Amputated or Bandaged</u> Field Type: Group non-repeating Source: User-entered	Required: In accordance with the following: <ul style="list-style-type: none"> MCHS follows the FBI EBTS specification for using field 15.018 to specify partial amputation vs full amputation vs unprintable for any reason other than full amputation. Refer to Appendix A.7 for detailed explanation. Occurrences: 1 Value and Format: <ul style="list-style-type: none"> Both Palm Position Number and Amputated or Bandaged Code must be populated in an occurrence. Must comply with Appendix A.7.
Friction Ridge Amputated or Bandaged Position	Value and Format: <ul style="list-style-type: none"> Value must be the same as the value specified in 15.013 Friction Ridge Generalized Position.
Amputated or Bandaged Code	Value and Format: <ul style="list-style-type: none"> Value must be one of the following <ul style="list-style-type: none"> UP for Fully amputated or otherwise unprintable XX for Partially amputated
15.020 <u>Comment</u> Field Type: Simple non-repeating Source: User-entered or Generated	Required: No Occurrences: 1 Value and Format: Length: Maximum 126
15.024 <u>Palmprint Quality Metric</u> Field Type: Group repeating Source: Generated	Required: No Occurrences: Maximum 9 Value and Format: <ul style="list-style-type: none"> Friction Ridge Metric Position, Quality Value, Algorithm Vendor Identification and Algorithm Product Identification must be populated in each occurrence.
Friction Ridge Metric Position	Value and Format: Must comply with specifications in NIST-2011, including the valid palm code values in Table 8. <ul style="list-style-type: none"> Value must be the same as the value specified in 15.013 Friction Ridge Generalized Position.
Quality Value	Value and Format: Value must be in the range 0 through 255.
Algorithm Vendor Identification	Value and Format: Value must be 4-character hexadecimal.
Algorithm Product Identification	Value and Format: Value must be in the range 1 through 65535.

Field	Requirements
15.030 <u>Device Monitoring Mode</u> Field Type: Simple non-repeating Source: User-entered or Hardcoded	Required: No Occurrences: 1 Value and Format: Must comply with specifications in NIST-2011, including the valid device monitoring mode condition values in Table 5.
15.902 <u>Annotation Information</u> Field Type: Group repeating Source: Generated/Hardcoded/User-entered	Required: No Occurrences: Maximum 100 Value and Format: <ul style="list-style-type: none"> Annotation GMT, Processing Algorithm Name Version, Algorithm Owner, and Process Description must be populated in each occurrence.
Greenwich Mean Time	Value and Format: Must be in the format YYYYMMDDhhmmssZ.
Processing Algorithm Name Version	Value and Format: Length: Maximum 64
Algorithm Owner	Value and Format: Length: Maximum 64
Process Description	Value and Format: Length: Maximum 255
15.903 <u>Device Unique Identifier</u> Field Type: Simple non-repeating Source: Hardcoded	Required: No Occurrences: 1 Value and Format: The first character must be 'M' or 'P'.
15.904 <u>Make Model Serial Number</u> Make, Model, and Serial Number of device that was used to capture the palm print image Field Type: Group non-repeating Source: Hardcoded	Required: No Occurrences: 1 Value and Format: <ul style="list-style-type: none"> Make, Model, and Serial Number must be present and populated.
Make	Value and Format: Length: Maximum 50
Model	Value and Format: Length: Maximum 50
Serial Number	Value and Format: Length: Maximum 50
15.993 <u>Source Agency Name</u> Field Type: Simple non-repeating Source: User-entered	Required: No Occurrences: 1 Value and Format: <ul style="list-style-type: none"> Could be obtained from description in Agency edit table using Source Agency ORI. Length: Maximum 125
15.996 <u>Hash</u> Field Type: Simple non-repeating Source: Generated	Required: No Occurrences: 1 Value and Format: Must be 64-character hexadecimal.

Field	Requirements
15.998 <u>Geographic Sample Acquisition Location</u> Field Type: Group non-repeating Source: User-entered	Required: No Occurrences: 1 Value and Format: <ul style="list-style-type: none"> • If either of Latitude Degree Value and Longitude Degree value is present, then both fields must be present and populated. • If any of Geographic Coordinate Universal Traverse Mercator Zone, Easting, and Northing is present, then all fields must be present and populated.
Universal Time Entry	Value and Format: Must be in the format YYYYMMDDhhmmssZ.
Latitude Degree Value	Value and Format: <ul style="list-style-type: none"> • Value must be in the range -90 through 90. • May be integer or decimal. • If this field contains a decimal value, then Latitude Minute Value and Latitude Second Value must not be populated.
Latitude Minute Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Latitude Degree Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal. • If this field contains a decimal value, then Latitude Second Value must not be populated.
Latitude Second Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Latitude Minute Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal.
Longitude Degree Value	Value and Format: <ul style="list-style-type: none"> • Value must be in the range -180 through 180. • May be integer or decimal. • If this field contains a decimal value, then Longitude Minute Value and Longitude Second Value must not be populated.
Longitude Minute Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Longitude Degree Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal. • If this field contains a decimal value, then Longitude Second Value must not be populated.

Field	Requirements
Longitude Second Value	Value and Format: <ul style="list-style-type: none"> • Can only be present if Longitude Minute Value is present. • Value must be in the range 0 through < 60. • May be integer or decimal.
Elevation	Value and Format: <ul style="list-style-type: none"> • Value must be in the range -422.000 through 8848.000. • May be integer or decimal.
Geodetic Datum Code	Value and Format: Must comply with specifications in NIST-2011, including the valid datum code values in Table 6. <ul style="list-style-type: none"> • Value must be 3- to 6-character hexadecimal.
Geographic Coordinate Universal Traverse Mercator Zone	Value and Format: Must be a valid UTM Zone with one or two digits followed by a single letter.
Geographic Coordinate Universal Traverse Mercator Easting	Value and Format: Value must be one to six digits.
Geographic Coordinate Universal Traverse Mercator Northing	Value and Format: Value must be one to eight digits.
Geographic Reference Text	Value and Format: Length: Maximum 150
Geographic Coordinate Other System Identifier	Value and Format: <ul style="list-style-type: none"> • If this field is present, Geographic Coordinate Other System Value must be present and populated. • Length: Maximum 10
Geographic Coordinate Other System Value	Value and Format: <ul style="list-style-type: none"> • If this field is present, Geographic Coordinate Other System Identifier must be present and populated. • Length: Maximum 126

Field	Requirements
15.999 <u>Palmprint Image</u> Field Type: Variable length binary image Source: Generated	<p>Required: In accordance with the following:</p> <ul style="list-style-type: none"> • All palm positions must be accounted for (two positions for full palms or four positions for upper/lower palm pairs) so there must be a record for each position. • MCHS follows the FBI EBTS specification for using field 15.018 to specify partial amputation vs full amputation vs unprintable for any reason other than full amputation. • Refer to Appendix A.7 for detailed explanation. <p>Occurrences: 1 Value and Format:</p> <ul style="list-style-type: none"> • The FBI EBTS specifies a nominal compression ratio of 15:1. Therefore, the following computation should result in a value of approximately 15: (Horizontal Line Length) x (Vertical Line Length) / (length of this image data field) • The minimum size is 5,000 bytes and the maximum size is 2,000,000 bytes.

12.7 A.7 ANNOTATIONS FOR FINGERPRINTS IN FIELD 2.084 AND FOR PALM PRINTS IN FIELD 15.018

For fingers, according to the **FBI EBTS Spec (pg C-3)**:

"A partially amputated finger should be printed and be marked amputated, XX. If the finger's image is missing for any reason, (for example, when the arresting agency did not specify a reason in its submission to the State Identification Bureau) the UP code should be used. This field is used to tell the AFIS which finger positions need to be characterized. The UP code should only be used when the entire image is not provided for fingerprints in the submission. This code will indicate that the AFIS matcher should ignore this image and not include the image in the matching process."

Therefore:

- If a finger is partially amputated and a partial fingerprint (distal) impression can be captured: Capture the impression and also set the annotation 2.084 Amputated or Bandaged Code to 'XX' to indicate a partial amputation.
- If a finger (distal) cannot be captured: Supply only the annotation by setting 2.084 Amputated and Bandaged to 'UP' to indicate that a fingerprint impression cannot be captured (is unprintable).

For palm prints, according to **ANSI/NIST standard (pg 385) as referenced by FBI EBTS Spec (Appx Q)**:

"XX shall be used only when a partial print exists due to amputation; therefore it contains some friction ridge detail. UP shall be used with the complete block where an image was to be transmitted, but there is no image due to amputation or total lack of friction ridge detail (such as with a bandage). An image with a scar should not be marked XX or UP."

Therefore:

- If the palm position is partially amputated and a partial impression can be captured: Capture the impression and also set the annotation 15.018 Amputated or Bandaged Code to 'XX' to indicate a partial amputation.
- If the entire palm position cannot be captured: Supply only the annotation by setting the 15.018 Amputated or Bandaged to 'UP' to indicate that the palm impression cannot be captured (is unprintable).

FINGERS	FINGERS	FINGERS		PALMS	PALMS	PALMS
	Amp/Band Code 2.084 in Type 2 record	Type 4 record with finger image		**	Amp/Band Code 15.018 in Type 15 record	Palm image in Type 15 record
Fingertip is amputated (part of distal above 1st joint is present)	XX	image		Part of upper palm is amputated	XX	image
Entire distal above 1st joint is amputated	UP	no record		Entire upper palm amputated	UP	no image
Distal is unprintable for any other reason (e.g., bandaged)	UP	no record		Entire upper palm is unprintable (e.g., bandaged)	UP	no image

** Same rules apply to lower palm

See [Type 14 Variable Resolution Fingerprint Image Record](#) for 4-4-2 slaps.

13.0 APPENDIX B - ANSI_NIST TRANSACTION FORMAT

This appendix describes some key elements of the transaction record format as implemented in MCHS.

To correctly format an MCHS tenprint transaction, both the requirements of this ICD and the ANSI/NIST-ITL 1-2011 transmission format standard must be followed. If there is a conflict between the ANSI/NIST standard and this ICD, this ICD takes precedence.

MCHS uses five of the record types that are documented in the ANSI/NIST transmission format standard:

Record Type	Record Name	Record Format	Contents
1	Transaction Information	Tagged text	Required. Information about the overall transaction file including an index to the other records in the file
2	Tenprint Data	Tagged text	Required. MCHS-defined text record; used in MCHS for demographic and other textual data associated with the fingerprint data; the contents of this record depend of the type of transaction
4	High-resolution Grayscale Fingerprint Image	Binary	Required. High-resolution grayscale image of fingerprint(s)
10	Facial Image	Tagged text with binary	Optional in ARR and DOCs (future). Image of face and related textual information
14	Variable-resolution fingerprint image	Tagged text with binary	Optional in APPs. Slap images for 4-4-2 applicants
15	Variable-resolution Palm Print Image	Tagged text with binary	Optional in ARR and DOCs. Image of palm print and related textual information

Three different record formats are used.

- Tagged text records use a tagged structure of fields, subfields, and information items containing text values. Tags are present only if there is data for the field.
- Tagged text with binary records use a tagged structure like the tagged text records and the last field in the record contains binary image data.
- Binary records use a fixed position field structure and include binary image data.

Structure requirements for the tagged text record format are described in [Appendix B.1](#); requirements for the tagged text with binary record format are described in [Appendix B.2](#); requirements for the binary record format are described in [Appendix B.3](#); and requirements for setting the IDC values in the Type 1 record.

All records begin with a length field that gives the length of the record including the length field itself and all separators. The format of the length field varies depending on whether the record is a tagged text or binary format. For tagged text record format (Types 1 and 2) and tagged text with binary record format (Types 10, 14 and 15) the length is included in a tagged field as described in [Appendix B.1](#). For binary record format (Type 4), the length is a 4-byte binary value in network byte order (i.e., most significant byte first).

Samples of each record type are found in Appendices G and H.

13.1 B.1 TAGGED TEXT RECORD FORMAT

Data fields in tagged text record format have the following format

$\langle \text{record type} \rangle . \langle \text{field number} \rangle : \langle \text{field value} \rangle G_S$

where G_S is a group separator character, ASCII value hexadecimal '1d'. The tag is the leading part through the colon character. The $\langle \text{record type} \rangle$ is record type number and the $\langle \text{field number} \rangle$ is a two or three digit field number. For record type 1, the $\langle \text{field number} \rangle$ must be a two-digit number and for record type 2, $\langle \text{field number} \rangle$ must be a three-digit number with leading zeroes. The tag is followed by the field data and concludes with the G_S separator character. An example, using field 1.04 type of transaction in the Type 1, is

1.04:ARR G_S

The last field of the record is terminated by an F_S character, ASCII value hexadecimal '1c' instead of a G_S .

There are four different structures that can make up the $\langle \text{field value} \rangle$, depending on the field type. The field types and required formats are documented in the table below. The term "element" is used when each position represents a different type of information - e.g., 2.067 Image Capture Equipment is a group non-repeating field with three elements - make, model, and serial number - versus multiple values for the same type of information.

Field Type	Format and Example	Comments
Simple non-repeating	$\langle \text{value} \rangle G_S$	No internal separators.
	2.020:ME G_S	Example: 2.020, Place of Birth
Simple repeating	$\langle \text{value}_1 \rangle^R_S \langle \text{value}_2 \rangle^R_S \dots \langle \text{value}_n \rangle^R_S G_S$ or $\langle \text{value}_1 \rangle^U_S \langle \text{value}_2 \rangle^U_S \dots \langle \text{value}_n \rangle^U_S G_S$	Internal separators may be either R_S or U_S but within a field, all must be the same. There are a variable number of $\langle \text{values} \rangle$.
	2.016:555555555 R_S 585001234 R_S 477001234 G_S	Example: 2.016, Social Security #
Group non-repeating	$\langle \text{element}_1 \rangle^R_S \langle \text{element}_2 \rangle^R_S \dots \langle \text{element}_n \rangle^R_S G_S$ or $\langle \text{element}_1 \rangle^U_S \langle \text{element}_2 \rangle^U_S \dots \langle \text{element}_n \rangle^U_S G_S$	Separators between elements in the group may be either R_S or U_S - however, within a field, all separators must be the same. <u>There are a fixed number of $\langle \text{elements} \rangle$ and all separators must appear, even if the element values are null.</u>
	2.039:Construction R_S Reynolds Corp $R_S R_S R_S$ Roc kland, MS G_S	Example: 2.039, Employment
Group repeating	$\langle \text{element}_{11} \rangle^U_S \langle \text{element}_{12} \rangle^U_S \dots \langle \text{element}_{1n} \rangle^R_S$ $\langle \text{element}_{21} \rangle^U_S \langle \text{element}_{22} \rangle^U_S \dots \langle \text{element}_{2n} \rangle^R_S$ $\langle \text{element}_{m1} \rangle^U_S \langle \text{element}_{m2} \rangle^U_S \dots \langle \text{element}_{mn} \rangle^R_S G_S$	U_S separators occur between elements in an occurrence of the group and R_S characters separate group occurrences. <u>There are a fixed number of $\langle \text{elements} \rangle$ and all separators must appear, even if the element values are null.</u>

Field Type	Format and Example	Comments
	2.017:Natl Agency Nr ^U _S 12-X45 ^R _S USAF Serial Nr ^U _S 34567 ^G _S	Example: 2.017, Misc Id #

Additional rules that must be followed when creating a tagged text record format include:

1. Fields must appear in ascending order by field number.
2. If a field contains no data, the tag and separator characters for the field must not be included in the record.

13.2 B.2 TAGGED TEXT WITH BINARY RECORD FORMAT

Tagged text with binary records contain all of the field types and must conform to all of the rules described in [Appendix B.1](#). For record types 10 and 15, <field number> must be a three-digit number with leading zeroes. This record format contains one additional field type, as described below:

Field Type	Format and Example	Comments
Image	<field data> ^F _S 10.999:<binary image data> ^F _S	Must conform to NIST-2011 image specifications. Example: 10.999, Facial Image

That binary image data does not require any special handling. It may contain values equivalent to the record separators described in [Appendix B.1](#) but since this is the last field in the record, it is not necessary to give them any special treatment such as escaping them. The field must, however, must conclude with the record terminator ^F_S.

13.3 B.3 BINARY RECORD FORMAT

Rules that must be followed when creating a binary record format include:

1. Records with a binary layout have a fixed layout of data without any separators or tags.
2. Data that represents a numeric quantity of greater than one byte in length (e.g. the length field) is stored in network byte order.
3. Fields must appear in the order specified.
4. Fields must be the length specified.

13.4 B.4 IDC FIELD VALUES

Each record other than the Type 1 must have a unique id number called an Information Designation Character (IDC) assigned to it. It uniquely identifies each record within the transaction. The IDC numbers must be sequential, beginning with 0, with no gaps. In Types 2, 10, 14 and 15 the IDC is recorded in field <record type>.002. In Type 4, the IDC is recorded in byte 5.

The records, identified by their IDC, are indexed in the Type 1 in field 1.03 File Content.

The records must appear in the transaction in ascending IDC sequence.

14.0 APPENDIX C - TRANSACTIONS SENT BY A SCANNING STATION TO MCHS

Appendix C.1 describes the requirements for a scanning station to send tenprint transactions to MCHS via SMTPS email. [Appendix C.2](#) describes the requirements for some existing scanning stations that use SMTP.

14.1 C.1 SMTPS MAIL PROCESSING REQUIREMENTS

A scanning station must use Simple Mail Transfer Protocol Secure (SMTPS) to send tenprint transactions to MCHS. See the reference documents for more details regarding the SMTPS protocol and the format of messages. If there are conflicts between the requirements in this appendix and the referenced RFCs, the information in this appendix takes precedence over information in the referenced documents.

The SMTPS protocol is based on the SMTP protocol but is carried over an SSL/TLS secure connection. Scanning stations using SMTPS protocol connect to host `mscjis.dps.ms.gov` over port 465. Once the SSL/TLS connection is established, normal SMTP exchanges are used.

A scanning station's email address is `from_station_id@mscjis.dps.ms.gov` where `from_station_id` is the station id assigned by the CIC. This is the same scanning station id that is in the TCN field.

Email messages consist of two parts: a header and a body. The two parts are separated by a null line indicated by the four ASCII control characters for the sequence 'CR, LF, CR, LF'. The header contains routing and control information about the message and the body contains the message itself. The character case of the initial keyword in each line of the message header is allowed by the standards to be case insensitive. Thus, "FROM:", "from:", "From:", and "FrOm:" are all allowable.

A scanning station may send other header lines than those listed in the remainder of this appendix such as Date:, CC:, or BCC:. MCHS ignores these additional header lines. Furthermore, MCHS does not depend on the order of lines in the message header as long as the required lines are present.

The approach used by MCHS is very similar to that used to send transactions to the FBI/NGI system. One area of difference is in the content of the subject line of the email - MCHS has specific requirements as described below.

Message Header

The email message header must contain the following header lines.

Header Line	Notes
To: <controller@mscjis.dps.ms.gov> - or - To: name <controller@mscjis.dps.ms.gov>	Note the angle brackets are part of the syntax around the email address. A descriptive name may be included as in To: MCHS Controller <controller@mscjis.dps.ms.gov>
From : from_station_id - or - From : from_station_id @mscjis.dps.ms.gov - or - From : station-name <from_station_id @mscjis.dps.ms.gov >	This contains the scanning station id (station_id) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in From: River County SO <ls000000@mscjis.dps.ms.gov>
Subject : subject_line	As described below

Header Line	Notes
Content-type: application/octet-stream	Must be present. See discussion below under "Message Body".
Content-transfer-encoding: Base64	Must be present. See discussion below under "Message Body".

Other leader lines may be included but will be ignored by MCHS.

Each email message must have a subject line in this format:

<TOT>; <Unique ID#>; <Last Name>, <First Name>; <DOB>; <C/L>

The fields in the subject line are separated by semi-colons ";" except for the Last Name, which is followed by a comma. The semi-colons and comma may be followed by a space character.

The fields in the subject line are defined in the table below.

Field	Length	Value	Notes
TOT	3	Type of transaction: ARR, APP, or DOC (the same value as in field 1.04 Type of Transaction)	Must be upper case; followed by a semi-colon
Unique ID Number	up to 12	For APP transactions, Applicant Agency ORI (the same value as in field 1.08 Arrest/Applicant/DOC Agency ORI) For ARR transactions, the Arrest Tracking Number (the same as field 2.701 Arrest Tracking Number) For DOC transactions, the Department of Corrections Number (this is the same as field 2.709 DOC Number)	Followed by a semi-colon
Last Name	up to 35	Subject's last name (the same value as in the Last Name of the first occurrence of field 2.018 Name)	Followed by a comma and a space
First Name	up to 20	Subject's first name (the same value as in the First Name of the first occurrence of field 2.018 Name)	Followed by a semi-colon
DOB	8	Subject's date of birth (the same value as in the first occurrence of field 2.022 Date of Birth)	Must be in format CCYYMMDD; followed by a semi-colon
C/L	1	C or L	"C" = not used "L" = always specify "L"

An example of the subject line of an ARR arrest fingerprint transaction is shown below:

ARR; 8897000000; BOND, JAMES; 19470805; L

where 8897000000 is the arrest tracking number.

Message Body

The Message Body contains the NIST transaction in the body itself. The transaction must be in the body of the email itself. It cannot be an attachment. MCHS will not accept transactions sent as attachments.

The content type of the body must be binary data type of ' `application/octet-stream` ' and it must be encoded as ' `Base64` '.

Base 64 is used for sending binary data in an email message body because some email exchangers transform message bodies by altering line terminations or break long lines into short ones. To protect the NIST fingerprint transaction, binary data is encoded as a series of short lines consisting of only printable ASCII characters. The scheme adopted by MIME RFCs 2045-2047, known as base 64 encoding, transforms 3 binary bytes (24 bits) into four printable ASCII characters from a set of 64. The base 64 characters are placed in lines of approximately 64 characters. Line terminations are ignored by software when the base 64 encoded transaction is converted back into its binary form. If the NIST transaction is not a multiple of three bytes, there is a special method to encode the fact. (See footnotes below.)

Example

Samples of transactions are shown in [Appendix G](#).

Footnotes:

1. Mail exchangers typically convert line terminations to match the conventions of the system on which the email exchanger is running. Lines are terminated in Linux with a newline (NL) control character. They are terminated with a carriage return (CR) control character under MacOS. The various Windows operating systems terminate lines with a CR followed by a NL.
2. The 64 characters are A through Z, a through z, 0 through 9, + and /. These characters can be thought of as "digits" in base 64, hence the name. The equals sign is used to indicate a file that is not a multiple of three bytes in length. See RFC 2045.

15.0 APPENDIX D - RESPONSES FROM MCHS TO A SCANNING STATION

MCHS sends a variety of transaction response messages to the scanning stations. These are described in [Section 4.2](#).

[Appendix D.1](#) describes the requirements for a scanning station to retrieve and process all messages sent to a scanning station's POP3 mail. [Appendix D.2](#) describes the requirements for some existing scanning stations that use POP3.

[Appendix D.3](#) describes the MS Search Response, Prosecutor and Court Disposition Forms, and DNA Database Collection Form, and Record Under Review Notice; [Appendix D.4](#) describes MCHS Reject Notices; [Appendix D.5](#) describes the MCHS Warning Notice; and describes the FBI Search Response and FBI Error Response.

15.1 D.1 POP3S MAIL PROCESSING REQUIREMENTS

A scanning station must use Post Office Protocol Version 3 Secure (POP3S) to retrieve these responses from MCHS. See the reference documents for more details regarding the POP3S protocol and the format of messages. If there are conflicts between the requirements in this appendix and the referenced RFCs, the information in this appendix takes precedence over information in the referenced documents.

The POP3S protocol is based on the POP3 protocol but is carried over an SSL/TLS secure connection. Scanning stations using POP3S protocol connect to host `mscjis.dps.ms.gov` over port 995. Once the SSL/TLS connection is established, normal POP3 exchanges are used.

A scanning station's email address is `station_id@mscjis.dps.ms.gov` where station id is the scanning station id assigned by the CIC. This is the same scanning station id that is used in the TCN field.

The POP3S protocol requires a login as part of the session. The login id is the station_id. The password is randomly generated and will be provided by MCHS support personnel.

Email messages consist of two parts: a header and a body. The two parts are separated by a null line indicated by the four ASCII control characters for the sequence 'CR, LF, CR, LF'. The header contains routing and control information about the message and the body contains the message itself. The character case of the initial keyword in each line of the message header is allowed by the standards to be case insensitive. Thus, "FROM:", "from:", "From:", and "FrOm:" are all allowable.

The subject line is always provided in messages sent to the scanning station from MCHS so that scanning station software can easily and reliably determine the proper handling of each incoming message.

MCHS may send other header lines than those listed in the remainder of this appendix such as Date:, CC:, or BCC:. These can be ignored by the scanning station.

The scanning station must retrieve any and all messages that are sent to its POP3 mail, even if it is a message that is not described in Appendices D and E. The station's processing of responses and unrecognized messages sent to its POP3 mail must include the following:

- The scanning station must automatically delete all types of messages from the station's POP3 mail file on the MCHS server. The CIC prefers that the scanning station retrieve all messages and delete them on the same day that MCHS sends them. The CIC sets a maximum number of days that messages can remain in the POP3 mail file. Currently, the maximum is **seven days**; however, the CIC may change the maximum. Therefore, the maximum number of days must be configurable. (Deleting POP3 mail messages is generally done using the POP3 mail delete command 'DELE'.)
- The scanning station must be able to print any and all transaction response messages. The entire email message, including the email header lines, must be printed.
- For any unidentified responses, the scanning station must also print the message headers and up to 300 lines (including header lines).

15.2 D.3 MS SEARCH RESPONSE, PROSECUTOR AND COURT DISPOSITION FORMS, DNA DATABASE COLLECTION FORM, AND RECORD UNDER REVIEW NOTICE

The responses to an arrest, applicant, or DOC transaction in MCHS include an MS Search Response (a rap sheet, confirmation message or a no record response). Arrest transactions also produce Prosecutor and Court Disposition Forms and, under certain conditions, also produce a DNA Database Collection Form and/or a Record Under Review Notice. All of these responses are sent to the scanning station that submitted the arrest or applicant transaction.

Each of these responses is sent in a separate email. See Section 7.0 for information on how to identify each type of message.

Message Header

Some of the header lines included in the email message header are listed below.

Header Line	Notes
To: <i>station-id</i> - or - To: <i>station-id @mscjis.dps.ms.gov</i> - or - To: <i>station-name</i> < <i>station_id @mscjis.dps.ms.gov</i> >	This contains the scanning station id (<i>station_id</i>) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in To: River County SO < <i>ls000000@mscjis.dps.ms.gov</i> >
From: "MCHS" < <i>mchs@mscjis.mchs.state.ms.us</i> >	Note the angle brackets are part of the syntax around the email address.
Subject : <i>original transaction subject line</i>	This is the same subject line as in the transaction sent to MCHS by the scanning station.
Content-type: <i>text/plain</i>	
Content-transfer-encoding: <i>7bit</i>	

The message header must be included when the transaction responses are printed.

Message Body

All Mississippi transaction responses begin with a short header that indicates the response type, the subject name, and handling information for the scanning station operator. Examples of all of these responses are shown below.

Print/Display

Each of these responses must be printed/displayed by the scanning station using a fixed-space font so that the data is properly aligned.

Example: an MS Rap Sheet

```
From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014
... ..
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
... ..
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>
```

To: Smallville <ls990001>
Subject: ARR;9010000009;BOND, JAMES;19481129;L
... ..
Content-Type: text/plain
Content-Transfer-Encoding: 7bit

Mississippi Criminal History System
Mississippi Rap Sheet for arrest transaction

Subject Name: BOND, JAMES
Transaction Control Number: ltest1-20030214-0001
Handling Information (MS ARR-Oth3 OthEm/AgyNo):

This is an original copy for the arrest agency.

Mississippi Criminal History Record
Information on file as of SEPTEMBER 1, 2014

1. INTRODUCTION

This record contains information contained in the criminal history file of Mississippi Department of Public Safety on the date it was prepared; if information is needed later, a new inquiry should be made. This information is based on fingerprint identification.

If the request for this information did not include fingerprints, this record may not describe the subject of the inquiry.

There may be further information concerning this subject in local files. Use of this information is subject to state and federal law and is limited to the purpose stated in the inquiry. Misuse is subject to criminal and civil penalty.

Offenses are marked as felonies, misdemeanors or violations in accordance with Mississippi law.

... ..

3. IDENTIFICATION DATA

NAME
BOND, JAMES ALBERT
BOND, JAMES

... ..

Example: an MS Confirmation Response

From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014

... ..

Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)

Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>

... ..

From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

To: Smallville <ls990001>

Subject: ARR;9010000009;BOND, JAMES;19481129;L

... ..

Content-Type: text/plain

Content-Transfer-Encoding: 7bit

Mississippi Criminal History System

Mississippi Rap Sheet and Disposition Forms for arrest transaction

Subject Name: BOND, JAMES

Transaction Control Number: ltest1-20030214-0001

Handling Information (MS ARR-0th7b 0thConf/AgyEm):

Confirmation copy for the transmitting agency.

A copy has also been emailed (for printing) to arrest agency

MSSORTEST Test Agency for SOR.

Mississippi Criminal History Record
Information on file as of MARCH 24, 2022

1. INTRODUCTION

```
*****
**                                     **
**           Confirmation Notice           **
**                                     **
*****
```

This notice is a confirmation that an inquiry of a Mississippi Criminal History Record was successfully processed for the person whose name appears below.

This confirmation notice does not indicate if a record was found for the named individual.

If more than a confirmation is needed, please contact the requesting agency for this transaction.

Use of this information is subject to state and federal law and is limited to the purpose stated in the inquiry. Misuse is subject to criminal and civil penalty.

2. SEX OFFENDER DATA

This confirmation notice does not indicate if sex offender data was found for the named individual.

3. CRIMINAL HISTORY

The subject (Name: BOND, JAMES) was successfully processed by MCHS. This confirmation notice does not indicate if a Mississippi criminal history record was found for the named individual.

End of Mississippi Rap Sheet

Example: an MS Court Disposition Form

From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014

... ..

Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)

Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>

... ..

From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

To: Smallville <ls990001>

Subject: ARR;9010000009;BOND, JAMES;19481129;L

... ..

Content-Type: text/plain

Content-Transfer-Encoding: 7bit

Mississippi Criminal History System COURT Disposition Form

Arrest Tracking Number: 880000001X

Name: BOND, JAMES, ,

Date of Birth (yyyymmdd): 19800831 Sex: Male Race: White

Arrest Agency: MS0000000 - Mainsville PD

Arrest Date (yyyymmdd): 20030111 Arrest Case Number: N/A

Arrest Charges:

Statute	Description	Counts	Severity	Date
---------	-------------	--------	----------	------

97-1-1	Conspiracy	1 Felony	20030110
...	...		

Example: an MS DNA Database Collection Form

```

From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014
...
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
...
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>
To: Smallville <ls990001>
Subject: ARR;9010000009;BOND, JAMES;19481129;L
...
Content-Type: text/plain
Content-Transfer-Encoding: 7bit

```

Mississippi Criminal History System
DNA Database Collection Form

State ID (SID): MS00000000 ATN: 880000001X

```

*****
*                                     FOR CRIME LAB USE ONLY
* Sample Received by: _____
* Date: _____
* MCL No. _____
*****

```

Name: BOND, JAMES, , III
...

Example: a Record Under Review Notice

```

From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014
...
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
...
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

```

To: Smallville <ls990001>
Subject: ARR; 8800000010; POTTER, ALBERT; 19800831; L
... ..
Content-Type: text/plain
Content-Transfer-Encoding: 7bit

Mississippi Criminal History System

=== RECORD UNDER REVIEW ===

Regarding your transaction ltest1-20030214-1234

Subject Name: BOND, JAMES

Date of Birth: 19481129

Arrest Tracking Number: 1111111111

Received by MCHS on 20140901 09:34:56

The criminal history for the subject individual (SID MS00000000
is under review and will be forwarded to you within 24 hours.

15.2.1 D.3.1 Blank Prosecutor and Court Disposition Forms

Blank Prosecutor and Court Disposition Forms are provided on the following pages.

Mississippi Criminal History System
PROSECUTOR Disposition Form

Arrest Tracking Number:

Name:

Date of Birth (yyyymmdd):

Sex:

Race:

Arrest Agency:

Arrest Date (yyyymmdd):

Arrest Case Number:

Arrest Charges:

Statute

Description

Counts Severity

Date

PROSECUTOR DISPOSITION - ATN

Prosecutor ORI: _____ Prosecutor Name _____

Case Number: _____ Disposition Date: _____

Statute: _____ Counts: _____ Severity: _____

Description: _____

Action: _____

Mississippi Criminal History System
COURT Disposition Form

Arrest Tracking Number:

Name:

Date of Birth (yyyymmdd):

Sex:

Race:

Arrest Agency:

Arrest Date (yyyymmdd):

Arrest Case Number:

Arrest Charges:

Statute

Description

Counts Severity

Date

COURT DISPOSITION - ATN

Court ORI: _____ Court Name: _____

Case Number: _____ Disposition Date: _____

Statute: _____ Counts: _____ Severity: _____

Description: _____

Verdict: _____

Incarceration: _____

Supervision: _____

Money: _____

15.3 D.4 MCHS REJECT NOTICE

If a transaction sent to MCHS by a scanning station contains uncorrectable errors, a reject notice is generated and sent back to the scanning station. The transaction is not processed further and so it must be corrected and resubmitted by the scanning station operator.

Message Header

Some of the header lines included in the email message header are listed below.

Header Line	Notes
To: <i>station-id</i> – or – To: <i>station-id @mscjis.dps.ms.gov</i> – or – To: <i>station-name <station_id @mscjis.dps.ms.gov></i>	This contains the scanning station id (<i>station_id</i>) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in To: River County SO <ls000000@mscjis.dps.ms.gov>
From: MCHS Prescreening <mchs@dps.ms.gov> – or -- From: MCHS Postscreening <mchs@dps.ms.gov>	Note the angle brackets are part of the syntax around the email address.
Subject: Reject: <i>original transaction subject line</i>	This contains the subject line information from the submitted transaction.
Content-type: text/plain	
Content-transfer-encoding: 7bit	

Message Body

The message body contains the MCHS Reject Notice. It lists general information about the transaction followed by a listing of uncorrectable errors.

The error messages that will appear in a reject notice if the transaction is not compliant with this ICD are found in the MCHS Reject Notice and Warning Notice Error Messages document.

If an uncorrectable error is in a field with multiple occurrences, the occurrence number with the uncorrectable error is listed. The first occurrence is occurrence 1.

Print/Display

This response must be printed/displayed by the scanning station using a fixed-space font so that the data is properly aligned.

Example 1: An annotated example of the Transaction Reject Notice due to errors other than problems with fingerprints is shown on the following page.

Example 1: Annotated example of the Transaction Reject Notice due to errors other than problems with fingerprints

From mchs@dps.ms.gov Mon Sep 01 10:24:15 CDT 2014

 Date: Mon, 01 Sep 2002 10:24:15 -0500 (CDT)
 Message-Id: <202009011024.NAA20055@mscjis.mchs.state.ms.us>

 From: MCHS Prescreening <mchs@dps.ms.gov>
 To: CLARKSDALE PD <ls140123>
 Subject: ARR;123456789X;SMITH, JOHN;19650215;L (1st & 2nd fields vary by TOT)

 Content-Type: text/plain
 Content-Transfer-Encoding: 7bit

MISSISSIPPI CRIMINAL HISTORY SYSTEM
 TRANSACTION REJECT NOTICE

Type of Transaction:	Applicant -or- Arrest -or- DOC	
Subject Name:	SMITH, JOHN	
Subject Date of Birth:	19650215	
Transmitting Agency	MS0140123 - CLARKSDALE PD	(from TCN):
Station/Operator Id :	ls140123 - CLARKSDALE PD LS 1	(Email
"From")		
Station Id From TCN:	ls140123 - CLARKSDALE PD LS 1	
Station Location and Type:	Local Agency Livescan	
Station Vendor:	Moore Biometrics	
Transaction Control Number:	ls140123-20020901-0001	
Arrest Agency:	MS0000001 - FULLER PD	(ARR
only)		
-or-		
Applicant Agency:	(APP only)	
-or-		
DOC Agency:	(DOC only)	
Print Agency:	MS0140123 - CLARKSDALE PD	
Date Transaction Created:	20020901	
Received at MCHS Prescreening:	20020901 10:40	
Version Number:	0502	
Equipment:	Scanners Inc JS-920 112-346	
Originating Agency Case Number:	2002-16329F	(ARR and
APP only) (only if populated)		
Arrest Tracking Number:	125356789X	(ARR
only)		
Highest Severity:	Felony	(ARR
only)		
Reason Fingerprinted:	Gaming App 75-76-33	(APP

only)
DOC Number: DOC12345 (DOC
only)

V - Vendor software or configuration errors

FIELD/VALUE	IDC	OCC	PROBLEM
Social Security #	1		V511 Invalid field value '11111111'
Hair Color 'Blueberry'			V701 Value not on MCHS edit table Hair Color

Further information about messages listed above is found in the MCHS Tenprint Transaction Reject Notice and Warning Notice Error Messages document.

The information at the beginning of the Reject Notice identifies the transaction. The following is additional information about some of the fields:

- "Transmitting Agency (from TCN)" and "Station Location and Type" are based on the station id in the TCN. (See TCN in Appendix A.1).
- "Station/Operator Id (Email "From")" is the station id that was in the email From line. (See Appendix C.)
- "Station/Operator Id (Email "From")" and "Station Id From TCN" must always be the same. If they are not, there will be an error message indicating this problem.
- "Arrest Agency" is from field 1.08 Arrest Agency ORI in the Type 1 record. Fields 1.08 and 2.702 Arrest Agency must always be the same. If not, an error message will indicate this problem.
- "Highest Severity" indicates the highest severity specified in the arrest charges.
- If there is a problem with the Type 1 record such that it cannot be parsed, some information that is normally in the Reject Notice cannot be included and is indicated by Unknown or Unavailable.
- If there is no value in the optional fields, the line is not included.

The errors that caused the transaction to be rejected are listed below the column headings "FIELD/VALUE IDC OCC PROBLEM".

- The error messages are described in the Reject Notice and Warning Notice Error Messages document..
- If the value in error is in a repeating field, the occurrence ("OCC") is included. The OCC field identifies the occurrence within a field that may have multiple values. The OCC is specified in the "OCC" column.
- If the error is about a specific Type 4, 10 or 15 record, the IDC value is included. The IDC identifies the specific record within the transaction that has the error. The IDC value is specified in the "IDC" column. This will be useful information for a vendor.

Example 2: an MCHS Reject Notice for an ARR due to problems with fingerprints (rejected by AFIS)

```
From mchs@dps.ms.gov Mon Sep 01 10:24:15 CDT 2014
... ..
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
... ..
From: MCHS Prescreening <controller@mscjis.mchs.state.ms.us>
To: SMALLVILLE SO <ls990001>
Subject: ARR;9010000009;POTTER, HARRY;19900315;L
... ..
Content-Type: text/plain
```

Content-Transfer-Encoding: 7bit

MISSISSIPPI CRIMINAL HISTORY SYSTEM
TRANSACTION REJECT NOTICE

Type of Transaction: Arrest
Subject Name: POTTER, HARRY
Subject Date of Birth: 19900315
Transmitting Agency (from TCN): MS0000000 - SMALLVILLE SO
Station/Operator Id (Email "From"): ls990001 - SMALLVILLE SO LIVESCAN 1
Station Id From TCN: ls990001 - SMALLVILLE SO LIVESCAN 1
Station Location and Type: Local Agency Livescan
Station Vendor: Concord Inc
Transaction Control Number: ls990001-20140901-1234
Arrest Agency: MS0990000 - SMALLVILLE PD
Print Agency: MS0000000 - SMALLVILLE SO
Date Transaction Created: 20140901
Arrest Tracking Number: 9010000009
Highest Severity: Felony
Archive ID: 9999999
Transaction Entered Workflow: 20140901 14:14
Transaction Completed Workflow: 20140901 14:45

Your transaction was canceled with the message '<afis error message>'.

Please retake the fingerprints and resubmit the transaction.

15.4 D.5 MCHS WARNING NOTICE

If a transaction sent to MCHS by a scanning station contains Type 10 or Type 15 records with uncorrectable errors, a warning notice is generated and sent back to the scanning station.

If the Type 1, Type 2, and Type 4 records did not have errors, the transaction will be processed and the Type 10 and Type 15 records cannot be resubmitted. This warning notice advises submitter of problems that need to be addressed so that future facial image records, and palm print image records are successfully submitted and processed.

If the Type 1, Type 2, or Type 4 records also had uncorrectable errors, MCHS will also send an MCHS Reject Notice and the transaction will not be processed. The Type 10 and Type 15 errors can be corrected and resubmitted when the Type 1, 2 and 4 errors are corrected and resubmitted.

Message Header

The email message header is the same as the header for the MCHS Reject Notice, as shown in D.3, except the subject line is as follows.

Header Line	Notes
Subject: Warning: original transaction subject line	This contains the subject line information from the submitted transaction.

Message Body

The message body contains the MCHS Transaction Warning Notice. It is identical to the MCHS Reject Notice, as shown in Example 1 in D.4. It lists only errors in the Type 10 and Type 15 records.

The error messages that will appear in a warning notice if the transaction is not compliant with this ICD are found in the MCHS Reject Notice and Warning Notice Error Messages document.

Print/Display

This response must be printed/displayed by the scanning station using a fixed-space font so that the data is properly aligned.

15.5 D.6 FBI SEARCH RESPONSE AND FBI ERROR RESPONSE

When transactions complete their processing at MCHS, many are reformatted and sent to the FBI/NGI system for additional processing. The results of processing at FBI/NGI are received by MCHS and then sent by MCHS to the scanning station in one of these messages.

Message Header

Some of the header lines included in the email message header are listed below.

Header Line	Notes
To: <i>station-id</i> - or - To: <i>station-id @mscjis.dps.ms.gov</i> - or - To: <i>station-name <station_id @mscjis.dps.ms.gov></i>	This contains the scanning station id (<i>station_id</i>) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in To: River County SO <ls000000@mscjis.dps.ms.gov>
From: "MCHS" <mchs@dps.ms.gov>	Note the angle brackets are part of the syntax around the email address.
Subject: FBI Response for <i>last name,first name</i>	The subject name is the same as given in the original transaction sent to MCHS.
Content-type: text/plain	
Content-transfer-encoding: 7bit	

The following is an example of the message headers:

Example of message headers

```
From mchs@dps.ms.gov Mon Sep 01 13:12:26 CDT 2014
... ..
Date: Mon, 01 Sep 2014 13:12:25 -0500 (CDT)
Message-Id: <201409011312.NAA20069@mscjis.mchs.state.ms.us>
... ..
From: "MCHS" <mchs@dps.ms.gov>
```

```
To: River County SO <ls0000000@mscjis.mchs.state.ms.us>
Subject: FBI Response for POTTER, HAROLD
...
Content-Type: text/plain
Content-Transfer-Encoding: 7bit
```

The message header must be included when the transaction responses are printed.

Message Body

All FBI transaction responses begin with a short header that indicates the response type, the subject name, and handling information for the scanning station operator. Examples of these responses are shown on the following pages.

Print/Display

Each of these responses must be printed/displayed by the scanning station using a fixed-space font so that the data is properly aligned.

Example: an FBI Search Response to an APP, ARR, or DOC if FBI Record is not found. Note the annotations in angle brackets.

Example: FBI Search Response to an APP, ARR or DOC if FBI Record is not found

```
Mississippi Criminal History System
FBI Rap Sheet (SRE) for applicant transaction
```

```
Subject Name: POTTER, HAROLD
Transaction Control Number: ls0000000-20140901-0002
Handling Information (FBI APP-Oth3 OthEm/AgyNo):
```

```
This is an original copy for the applicant agency.
```

```
*****
```

```
**      FBI Response for APP Transaction      **
*****
** Type of Submission: APP                    **
** Type of Response: SRE                     **
** Archive ID: 90000000                      **
** SID: MS00000017X                          **
```

<if APP: only if found on

```
MCHS>
```

```
** Date Submitted: 20140901                    **
** Response Received: 20140901                 **
** FBI Response TCN: E20130901000000139999     **
**                                              **
*****
```

```
*****
**
**      No FBI Record Found                    **
**                                              **
```

```

*****
Originating Agency Case Number: 111-01 <APP/ARR only; only if in
APP/ARR>
    State ID Number: MS000000X <ARR only>
    Name: POTTER,HAROLD CODSWALLOP <from APP/ARR/DOC>
    Employer and Address: ACME, 123 Main St, Rose, TX <APP/ARR only; only if in
APP/ARR>
    Occupation: Driver <APP/ARR only; only if in
APP/ARR>
    Residence of Person Fingerprinted: 999 Main St, Rose, TX <APP/ARR only; only if in
APP/ARR>
    Controlling Agency ID: MS000000Z
    Search Results Findings: N
    Treat as Adult: Y <ARR only; only if in ARR>

    Message: M0111-Another message from the FBI <only if there is a
value>
    <can be up to 11 messages>

    Electronic Rap Sheet: (Identity History Summary)
    CIVIL APPLICANT RESPONSE <APP only>
NCN E20130901000000139999 CIDN OCA <if APP>
FBI UCN 555222WS0 SID MS0000000X OCA 1111 <if ARR>
... ..
    A SEARCH OF THE FINGERPRINTS ON THE ABOVE
INDIVIDUAL HAS REVEALED NO PRIOR ARREST
DATA. CJIS DIVISION
... ..
End of FBI Rap Sheet

```

Example: an FBI Search Response to an APP, ARR, or DOC if an FBI Record is found

The sample is shown on the next page. Note the annotations in angle brackets. The content and format of the Electronic Rap Sheet will vary. If the response is for an APP, the following will appear above the asterisk boxes:

```

<<<< ATTENTION >>>>
<<<< ATTENTION >>>>
<<<< ATTENTION >>>>
Hit received for Applicant

```

Example: FBI Search Response to an APP, ARR, or DOC if an FBI Record is found

```

Mississippi Criminal History System
FBI Rap Sheet (SRE) for applicant transaction

Subject Name: POTTER, HAROLD
Transaction Control Number: 1s0000000-20140901-0002
Handling Information (FBI APP-Oth3 OthEm/AgyNo):

```

This is an original copy for the arrest agency.

** FBI Response for APP Transaction **
***** **

** Type of Submission: APP **
** Type of Response: SRE **
** Archive ID: 9000000 **
** SID: MS0000017X ** <if APP: only if found on

MCHS>

** Date Submitted: 20140901 **
** Response Received: 20140901 **
** FBI Response TCN: E20130901000000139999 **
**

**
** FBI Record Found **
** Rep Sheet Printed Below **
**

Originating Agency Case Number: 111-01 <APP/ARR only; only if in APP/

ARR>

FBI Number/UCN: 1234FFBI9
State ID Number: MS000000X <ARR only>
Name: POTTER,HAROLD CODSWALLOP <FBI Master Name>
Employer and Address: ACME, 123 Main St, Rose, TX <APP/ARR only; only if in APP/

ARR>

Occupation: Driver <APP/ARR only; only if in APP/

ARR>

Residence of Person Fingerprinted: 999 Main St, Rose, TX <APP/ARR only; only if in APP/

ARR>

Controlling Agency ID: MS000000Z
Submitted Name: POTTER,HARRY <only if different than FBI

Master Name>

Search Results Findings: N
Treat as Adult: Y <ARR only; only if in ARR>
Message: M0111-Another message from the FBI <only if there is a

value>

<can be up to 11 messages>

Electronic Rap Sheet: (Identity History Summary)

UNITED STATES DEPARTMENT OF JUSTICE

... ..

MS000000Z

NCN E20130901000000139999

TCN 0009000000
...
End of FBI Rap Sheet

Example: an FBI Error Response to an APP, ARR, or DOC

Note the annotations in angle brackets. The most common causes of error responses are poor quality fingerprints and mislabeled fingers.

Example: FBI Error Response to an APP, ARR or DOC

Mississippi Criminal History System
FBI Error Report (ERRT) for applicant transaction
Subject Name: POTTER, HAROLD
Transaction Control Number: 1s0000000-20140901-0002
Handling Information (FBI APP-Oth3 OthEm/AgvNo):
This is an original copy for the applicant agency.

<<<< ATTENTION >>>>
<<<< ATTENTION >>>>
<<<< ATTENTION >>>>
ERR/ERRT received

** FBI Response for Applicant Transaction **

** **
** Type of Submission: APP **
** Type of Response: ERR **
** Archive ID: 9000001 **
** SID: MS0000017X **

< if APP: only if found on

MCHS>

** Date Submitted: 20140901 **
** Response Received: 20140901 **
** FBI Response TCN: E20130901000000139999 **
** **

Originating Agency Case Number: 111-01

<APP/ARR only; only if in APP/

ARR>

State ID Number: MS000000X
Controlling Agency ID: MS000000Z

<ARR only>

MESSAGE IS:

L0008 - The quality of the characteristics is too low to be used .
...
End of FBI Error Report

Example: an FBI Confirmation Response to an APP, ARR, or DOC. This is sent to the transmitting station instead of the rapsheet if the ORI has been configured to only receive confirmation responses.

Mississippi Criminal History System
FBI Rap Sheet (SRE) for arrest transaction

Subject Name: POTTER, HAROLD
Transaction Control Number: 1s0000000-20140901-0002
Handling Information (FBI ARR-0th7b 0thConf/AgyEm):

Confirmation copy for the transmitting agency.
A copy has also been emailed (for printing) to arrest agency
MSSORTEST Test Agency for SOR.

```
*****
**      FBI Response for Applicant Transaction      **
*****
**                                                    **
**      Type of Submission: ARR                      **
**      Type of Response: SRE                      **
**              Archive ID: 9004374                 **
**              SID: MS00006769                     **
**      Date Submitted: 20220324                    **
**      Response Received: 20220324                 **
**      FBI Response TCN: 0009004374                **
**                                                    **
*****

*****
**                                                    **
**              Confirmation Notice                  **
**                                                    **
*****
```

Name: POTTER, HAROLD
Controlling Agency ID: MSSORTEST

Electronic Rap Sheet: (Identity History Summary)

This is the Confirmation Notice that the transaction has been
successfully processed by the FBI.

This Confirmation Notice does not indicate if a record was found
for the named individual.

If more than a confirmation is needed, please contact the requesting agency for this transaction.

End of FBI Rap Sheet

15.6 D.7 FBI SEARCH RESPONSE AND FBI ERROR RESPONSE

When transactions complete their processing at FBI/NGI, the National Sex Offender Registry (NSOR) is searched for applicant transactions with reason fingerprinted CCDBG 1 and CCDBG Volunteer 1 via the NCIC message switch. The results of processing are received by MCHS and then sent by MCHS to the scanning station in one of these messages.

There are two different types of NSOR responses returned by MCHS to the agency:

- NSOR Response
- Delayed NSOR Response

Both responses are sent by MCHS to the agency in separate email messages as part of applicant CCDBG requests. The response is sent to the same email address as rap sheets. The agency will always receive an NSOR Response when submitting a CCDBG request but will only receive a Delayed NSOR Response if the NSOR registration changes within 5 days of the original NSOR Response such that a new match is returned.

The Delayed NSOR Response will notify the agency of a person who was not registered in NSOR at the time of the CCDBG applicant submission but subsequently was registered in NSOR within 5 days of the submission.

Note that the NSOR search uses a "fuzzy" name search so it may return candidates with names that approximately match but do not exactly match a name contained in the applicant submission.

The examples given in this section include the full email message that is sent, including SMTP headers.

15.6.1 How to Identify an NSOR Response Email Message

The subject line of the response email will be: Subject: NSOR Response for <last name>, <first name>. For example:

Subject: NSOR Response for SMITH, JOHN

In addition, the first two lines of the body of an NSOR Response or Delayed NSOR Response:

Mississippi Criminal History System
NSOR Response for applicant transaction

This is contrasted with the following first two lines in applicant rap sheet responses:

Mississippi Criminal History System
Mississippi Rap Sheet and Disposition Forms for applicant transaction

15.6.2 How to Interpret the Results of an NSOR Response

The RESULTS section indicates if there is a biometric match in the NSOR for the biometrics provided in the applicant submission and how many candidates are in the response. There are three cases:

- No matches and no candidates
- Biometric matches
- Non-biometric candidates

15.6.2.1 No Matches and No Candidates

The simplest case is when neither the biometrics nor the identifiers supplied (e.g. name, date of birth, etc) found any candidates in the NSOR. In this case, the RESULTS section just contains one line:

```
Number of candidates : 0
```

15.6.2.2 Biometric Matches

A biometric match positively identifies through biometrics that the person who submitted their biometrics is registered in the NSOR. This example from the RESULTS section is an example of a biometric match:

```
Biometric match      : Yes  
Number of candidates : 1
```

In this case, the biometrics provided in the applicant submission matched a person registered in the NSOR. The CANDIDATE information contains the information about the registration in the NSOR.

Note that it is possible for more than one candidate to be returned in a biometric match if the same person is registered in the NSOR from more than one state at the same time. This should not happen often since states are supposed to remove their NSOR registration when a person moves to a new state. In this case, the FBI number listed for each candidate is the same since the biometrics match. This is an example of this case:

```
Biometric match      : Yes  
Number of candidates : 2
```

15.6.2.3 Non-Biometric Candidates

If the biometrics could not be used to identify a person registered in the NSOR but some of the non-biometric identifiers (e.g. name, date of birth, etc) did match one or more registrations in the NSOR, then the RESULTS section indicates that there was not a biometric match but that there were candidates that need to be reviewed in order to determine if a match is found. For example:

```
Biometric match      : No  
Number of candidates : 3
```


In this case, the biometrics did not match an NSOR registration but some of the identifiers matched one or more NSOR registrations. The information about each candidate is returned. The agency needs to do further review in order to determine if any of the candidates match the person who submitted the applicant transaction.

15.7 NSOR RESPONSE FORMAT

Each NSOR response consists of:

- Email header with subject line
- Standard MCHS handling information
- Title:
 - National Sex Offender Registration Information
- Standard MCHS copy information
- Section 1. INTRODUCTION
 - Common to all types of responses
- Section 2. SEX OFFENDER DATA
 - SEARCH IDENTIFIERS section
 - Identifiers used for NSOR query (includes post-processing)
 - RESULTS section
 - Summary of results including:
 - If the match was biometric
 - How many candidates are being returned
 - CAVEATS section
 - Only present if one or more caveats are returned from NSOR
 - Example of caveat:
 - ATTENTION: THE SOC USED IN YOUR TRANSACTION HAS NOT BEEN ASSIGNED BY THE SOCIAL SECURITY ADMINISTRATION. PLEASE CHECK FOR A DATA ENTRY ERROR.
 - 0 or more CANDIDATE sections
 - Contains list of identifiers used to match candidate
 - Note that NAM is only listed here if the name in the candidate is an exact match to the name in the search identifiers.
 - List of data items about candidate from NSOR
 - Section not present if no candidates found
 - Listed in order of highest number of identifiers found

Keyword/value pairs are used for data elements within the SEX OFFENDER DATA section using the format

keyword : value

Note that the number of spaces before or after the colon in the examples below may differ from the actual number received.

15.7.1 Use of Numeric 0 instead of Alphabetic O

The FBI NCIC system converts alphabetic capital O characters to numeric 0 characters in most data that it receives and stores and returns to MCHS. The result is that in the candidate list sections, numeric 0 characters may appear when alphabetic O characters are expected. For example, in the examples below the City Name (CTY) field for a candidate the city SILVERTOWN (alphabetic O) is spelled SILVERTOWN (numeric 0). Note that MCHS will ensure that identifiers (such as DOB) and names (content of NAM field in candidate list) always use alphabetic capital O instead of numeric 0 in the NSOR responses.

15.7.2 Example of a No Match

In this example, neither the biometrics nor identifiers supplied in the submission match a record in the NSOR.

```
From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014
```

```
... ..
```

```
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
```

```
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
```

```
... ..
```

```
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>
```

```
To: Smallville <ls990001>
```

```
Subject: NSOR Response for BOND, JAMES
```

```
... ..
```

```
Content-Type: text/plain
```

```
Content-Transfer-Encoding: 7bit
```

```
Mississippi Criminal History System
```

```
NSOR Response for applicant transaction
```

```
Subject Name: BOND, JAMES
```

```
Transaction Control Number: ls990001-20230306-9104
```

```
Handling Information (FBI APP-0th1a 0thEm/AgyEm):
```

```
Original copy for the applicant agency.
```

```
National Sex Offender Registration Information
```

```
Information on file as of MARCH 06, 2023
```

1. INTRODUCTION

These are results of an NSOR search conducted by MCHS for the person whose name appears below. The search was conducted using biometrics and other identifiers.

The results indicate how many candidates are found and whether the candidates are the result of either a biometric or non-biometric match (using identifiers provided in the applicant submission).

If non-biometric candidates were returned, then further investigation of the results is needed by the agency in order to determine if the results match the person in question. If multiple candidates are returned, they are listed in descending order of highest likelihood of a match based on the highest number of identifiers matched.

2. SEX OFFENDER DATA

SEARCH IDENTIFIERS:

(NAM) Name : BOND, JAMES
(DOB) Date of birth : 19800215
(SOC) Social Security Number : 123456789
(FBI) FBI Number : 1C234029
(SEX) Sex : Male
(RAC) Race : White

RESULTS:

Number of candidates : 0

15.7.3 Example of a Biometric Match

From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014

... ..

Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)

Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>

... ..

From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

To: Smallville <ls990001>

Subject: NSOR Response for BOND, JAMES

... ..

Content-Type: text/plain

Content-Transfer-Encoding: 7bit

Mississippi Criminal History System

NSOR Response for applicant transaction

Subject Name: BOND, JAMES

Transaction Control Number: ls990001-20230306-9104

Handling Information (MS APP-Oth9a OthEm/AgyNo):

Original copy for the applicant agency.

National Sex Offender Registration Information

Information on file as of MARCH 06, 2023

1. INTRODUCTION

These are results of an NSOR search conducted by MCHS for the person whose name appears below. The search was conducted using biometrics and other identifiers.

The results indicate how many candidates are found and whether the candidates are the result of either a biometric or non-biometric match (using identifiers provided in the applicant submission).

If non-biometric candidates were returned, then further investigation of the results is needed by the agency in order to determine if the results match the person in question. If multiple candidates are returned, they are listed in descending order of highest likelihood of a match based on the highest number of identifiers matched.

2. SEX OFFENDER DATA

SEARCH IDENTIFIERS:

(NAM) Name	: BOND, JAMES
(DOB) Date of Birth	: 19800215
(SOC) Social Security Number	: 123456789
(FBI) FBI Number	: 1C234029
(SEX) Sex	: Male
(RAC) Race	: White

RESULTS:

Biometric match	: Yes
Number of candidates	: 1

CANDIDATE 1:

(AOV) Age of Victim	: 42
(CMC) Caution and Medical Conditions:	30 - SEXUALLY VIOLENT PREDATOR - CONTACT ORI FOR DETAILED INFORMATION
(CON) Date of Conviction	: 19910120
(COU) County	: ESSEX
(CRR) Conviction Resulting in Registration:	RAPE - GUN
(CTY) City Name	: SILVERTOWN
(DLU) Date Last Update	: 20230221 1252 EST
(DNA) DNA Profile Indicator	: N
(DOB) Date of Birth	: 19411012

```

(DTE) Date and Time of Entry      : 20230221 1252 EST
(ERD) Ending Registration Date    : NONEXP
(EYE) Eye Color                  : BR0
(FBI) FBI Number/UCN             : 1C234029
(HAI) Hair Color                 : BR0
(HGT) Height                     : 510
(MKE) Message Key                : SEXUAL OFFENDER - CAUTION
(NAM) Name                       : BOND, JAMES
(NIC) NCIC Number                : X750551550
(OCA) Originating Agency Case    : 1998-1234589
(ORD) Offender Registration Date  : 19980301
(ORI) Originating Agency Identifier : MSMHP0000 ORI IS MISSISSIPPI HIGHWAY
SAFETY PATROL HQ JACKSON 601 933-2651
(PLC) Place of Crime             : CA
(RAC) Race                       : W
(SEX) Sex                        : M
(SNA) Street Name                : ELM STREET
(SNU) Street Number              : 1234
(SOV) Sex of Victim              : F
(STA) State Name                 : MD
(SXP) Sexual Predator Indicator  : N
(WGT) Weight                     : 175

```

In this example, the biometrics supplied in the applicant submission matched an existing record at the FBI. The resulting FBI number was used by MCHS along with other identifiers to search the NSOR, returning a match on the FBI number which is a biometric match.

15.7.4 Example of a Non-Biometric Match Using Two Names in the Applicant Submission

In this example, two names were supplied in the submission: BOND, JAMES and BIND, JIM. The biometrics supplied with the applicant transaction did not match any person at the FBI so MCHS did not use an FBI number was not used in the NSOR search but instead used other identifiers including both names. A search of the NSOR using these other identifiers returned two candidates:

- The first one matched on one of the names (NAM) supplied and date of birth (DOB)
- The second one matched only on social security number (SOC)

The results section indicates that the results are from a non-biometric match and there are two candidates. Each of the two candidate sections contains all of the information from NSOR about the candidate.

```

From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014
...
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
...
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>
To: Smallville <ls990001>

```

Subject: NSOR Response for BOND, JAMES

... ..

Content-Type: text/plain

Content-Transfer-Encoding: 7bit

Mississippi Criminal History System

NSOR Response for applicant transaction

Subject Name: BOND, JAMES

Transaction Control Number: 1s990001-20230306-9104

Handling Information (MS APP-0th9a 0thEm/AgyNo):

Original copy for the applicant agency.

National Sex Offender Registration Information

Information on file as of MARCH 06, 2023

1. INTRODUCTION

These are results of an NSOR search conducted by MCHS for the person whose name appears below. The search was conducted using biometrics and other identifiers.

The results indicate how many candidates are found and whether the candidates are the result of either a biometric or non-biometric match (using identifiers provided in the applicant submission).

If non-biometric candidates were returned, then further investigation of the results is needed by the agency in order to determine if the results match the person in question. If multiple candidates are returned, they are listed in descending order of highest likelihood of a match based on the highest number of identifiers matched.

2. SEX OFFENDER DATA

SEARCH IDENTIFIERS:

(NAM) Name	: BOND, JAMES / BIND, JIM
(DOB) Date of Birth	: 19800215
(SOC) Social Security Number	: 123456789
(SEX) Sex	: Male
(RAC) Race	: White

RESULTS:

Biometric match : No
Number of candidates : 2

CANDIDATE 1:

(AOV) Age of Victim : 42
(CMC) Caution and Medical Conditions: 30 - SEXUALLY VIOLENT PREDATOR - CONTACT
ORI FOR DETAILED INFORMATION
(CON) Date of Conviction : 19910120
(COU) County : ESSEX
(CRR) Conviction Resulting in Registration: RAPE - GUN
(CTY) City Name : SILVERTOWN
(DLU) Date Last Update : 20230221 1252 EST
(DNA) DNA Profile Indicator : N
(DOB) Date of Birth : 19800215
(DTE) Date and Time of Entry : 20230221 1252 EST
(ERD) Ending Registration Date : NONEXP
(EYE) Eye Color : BR0
(HAI) Hair Color : BR0
(HGT) Height : 510
(MKE) Message Key : SEXUAL OFFENDER - CAUTION
(NAM) Name : BOND, JAMES
(NIC) NCIC Number : X750551550
(OCA) Originating Agency Case : 1998-1234589
(ORD) Offender Registration Date : 19980301
(ORI) Originating Agency Identifier : MSMHP0000 ORI IS MISSISSIPPI HIGHWAY
SAFETY PATROL HQ JACKSON 601 933-2651
(PLC) Place of Crime : CA
(RAC) Race : W
(SEX) Sex : M
(WGT) Weight : 175

CANDIDATE 2:

(ADD) Address Type : 01 - RESIDENCE (LAST KNOWN)
(AOV) Age of Victim : 42
(CMC) Caution and Medical Conditions: 30 - SEXUALLY VIOLENT PREDATOR - CONTACT
ORI FOR DETAILED INFORMATION
(CON) Date of Conviction : 19910120
(COU) County : ESSEX
(CRR) Conviction Resulting in Registration: RAPE - GUN
(CTY) City Name : SILVER TOWN
(CTZ) Citizenship : US

(DOB) Date of Birth	: 19521012
(DTE) Date and Time of Entry	: 20110316 1620 EDT
(EMP) Employer Name	: 7-11
(EYE) Eye Color	: BR0
(FBI) FBI Number/UCN	: 123456A
(HAI) Hair Color	: BR0
(HGT) Height	: 510
(JUV) Juvenile Offender Indicator	: N
(MIS) Miscellaneous	: FELONY RAPE AND KIDNAPPING
(MKE) Message Key	: SEXUALLY VIOLENT PREDATOR
(MNU) Miscellaneous Number	: AS-123456789
(NAM) Name	: SMITH, JOHN J
(NIC) NCIC Number	: X700174002
(OCA) Originating Agency Case	: 2002-1122334
(OCP) Occupation	: CASHIER
(OFS) Offender Status	: 25 - COMPLIANT - REGISTERED
(ORD) Offender Registration Date	: 19980521
(ORI) Originating Agency Identifier	: IN0200000
(PLC) Place of Crime	: DC
(POB) Place of Birth	: TX
(RAC) Race	: W
(ROV) Relationship to Victim	: ST - VICTIM WAS STRANGER
(SEX) Sex	: M
(SHN) School Name	: UNIV OF MARYLAND SILVER CITY CAMPUS
(SKN) Skin Tone	: DRK
(SMT) Scars, Marks, Tattoos, and Other Characteristics:	SC R HND
(SNA) Street Name	: ELM STREET
(SNU) Street Number	: 1234
(SOC) Social Security Number	: 123456789
(SOV) Sex of Victim	: F
(STA) State Name	: MD
(SXP) Sexual Predator Indicator	: Y
(TIR) Tier Level	: 1
(TNO) Telephone Number	: 301 555-1212

15.7.5 Example of a Non-Biometric Match Where Candidates Exceed Limit

This example shows a non-biometric match in which there are more than 10 matching candidates in NSOR for the identifiers provided. In this case, 10 candidates are returned but the "Max candidates exceeded" keyword in the RESULTS section is set to indicate there are more candidates in NSOR than the number shown.

Note that in this example, ellipses (...) are used for brevity and clarity in this example and do not occur in the actual message.

From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014

... ..

Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)

Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>

... ..

From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

To: Smallville <ls990001>

Subject: NSOR Response for BOND, JAMES

... ..

Content-Type: text/plain

Content-Transfer-Encoding: 7bit

Mississippi Criminal History System

NSOR Response for applicant transaction

Subject Name: BOND, JAMES

Transaction Control Number: ls990001-20230306-9104

Handling Information (MS APP-0th9a 0thEm/AgyNo):

Original copy for the applicant agency.

National Sex Offender Registration Information

Information on file as of MARCH 06, 2023

1. INTRODUCTION

These are results of an NSOR search conducted by MCHS for the person whose name appears below. The search was conducted using biometrics and other identifiers.

The results indicate how many candidates are found and whether the candidates are the result of either a biometric or non-biometric match (using identifiers provided in the applicant submission).

If non-biometric candidates were returned, then further investigation of the results is needed by the agency in order to determine if the results match the person in question. If multiple candidates are returned, they are listed in descending order of highest likelihood of a match based on the highest number of identifiers matched.

2. SEX OFFENDER DATA

SEARCH IDENTIFIERS:

(NAM) Name : BOND, JAMES / BIND, JIM
(DOB) Date of Birth : 19800215
(SOC) Social Security Number : 123456789
(SEX) Sex : Male
(RAC) Race : White

RESULTS:

Biometric match : No
Number of candidates : 10
Max candidates exceeded : Yes

CANDIDATE 1:

...
(DOB) Date of Birth : 19800215
...
(NAM) Name : BOND, J
...
...

CANDIDATE 10:

...
(DOB) Date of Birth : 19800215
...
(NAM) Name : BOND, JIM
...

15.7.6 Example of a No-Match with Caveats

This example is the same as the No-Match example already given, except it contains the optional CAVEATS section. In this case, the applicant supplied an invalid social security number which resulted in NSOR returning a caveat that the social security number is not valid.

```
From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014
... ..
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
... ..
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>
To: Smallville <ls990001>
```

Subject: NSOR Response for BOND, JAMES

... ..

Content-Type: text/plain

Content-Transfer-Encoding: 7bit

Mississippi Criminal History System

NSOR Response for applicant transaction

Subject Name: BOND, JAMES

Transaction Control Number: 1s990001-20230306-9104

Handling Information (MS APP-0th9a 0thEm/AgyNo):

Original copy for the applicant agency.

National Sex Offender Registration Information

Information on file as of MARCH 06, 2023

1. INTRODUCTION

These are results of an NSOR search conducted by MCHS for the person whose name appears below. The search was conducted using biometrics and other identifiers.

The results indicate how many candidates are found and whether the candidates are the result of either a biometric or non-biometric match (using identifiers provided in the applicant submission).

If non-biometric candidates were returned, then further investigation of the results is needed by the agency in order to determine if the results match the person in question. If multiple candidates are returned, they are listed in descending order of highest likelihood of a match based on the highest number of identifiers matched.

2. SEX OFFENDER DATA

SEARCH IDENTIFIERS:

(NAM) Name	: BOND, JAMES
(DOB) Date of birth	: 19800215
(SOC) Social Security Number	: 123456789
(FBI) FBI Number	: 1C234029
(SEX) Sex	: Male

(RAC) Race : White

CAVEATS:

ATTENTION: THE SOC USED IN YOUR TRANSACTION HAS NOT BEEN ASSIGNED BY THE SOCIAL SECURITY ADMINISTRATION. PLEASE CHECK FOR A DATA ENTRY ERROR.

RESULTS:

Number of candidates : 0

15.8 DELAYED NSOR RESPONSE

The format of the Delayed NSOR Response is the same as the NSOR Response except for:

- The title is: National Sex Offender Registration Information (Delayed Response)
- The INTRODUCTION section contains an additional line that describes the reason for the delayed response
- The RESULTS section contains a line indicating the date and time of the original NSOR search using this keyword:
 - Original Search Date

Note that a Delayed NSOR Response always contains candidates.

15.8.1 Example of a Non-Biometric Delayed NSOR Response

In this example, a no-match NSOR response was previously sent but then something in the NSOR registration changed that caused the identifiers previously used to search NSOR to now find a match (such as a person being registered in NSOR within 5 days of the original applicant submission and search of NSOR).

```
From mchs@mscjis.mchs.state.ms.us Mon Sep 01 10:24:15 CDT 2014
... ..
Date: Mon, 01 Sep 2014 10:24:15 -0500 (CDT)
Message-Id: <201409011024.NAA20055@mscjis.mchs.state.ms.us>
... ..
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>
To: Smallville <ls990001>
Subject: NSOR Response for BOND, JAMES
... ..
Content-Type: text/plain
Content-Transfer-Encoding: 7bit

Mississippi Criminal History System
NSOR Response for applicant transaction

Subject Name: BOND, JAMES
Transaction Control Number: ls990001-20230306-9104
```

Handling Information (MS APP-Oth9a OthEm/AgyNo):

Original copy for the applicant agency.

National Sex Offender Registration Information (Delayed Response)
Information on file as of MARCH 06, 2023

1. INTRODUCTION

These are delayed results of an NSOR search conducted by MCHS for the person whose name appears below. The search was conducted using biometrics and other identifiers.

The results are delayed because the NSOR registration information changed within 5 days of the original NSOR search which previously returned a no-match but now results in a match.

The results below indicate whether the candidates were found using biometrics or other identifiers.

If candidates were found using other identifiers, then further investigation is needed by the

agency into the results in order to determine if the results match the person in question.

If multiple candidates are returned, they are listed in descending order of highest likelihood of a match based on the highest number of identifiers matched.

2. SEX OFFENDER DATA

SEARCH IDENTIFIERS:

(NAM) Name	: BOND, JAMES
(DOB) Date of Birth	: 19800215
(SOC) Social Security Number	: 123456789
(SEX) Sex	: Male
(RAC) Race	: White

RESULTS:

Biometric match	: No
Number of candidates	: 1
Original Search Date	: 20230303

CANDIDATE 1:

(AOV) Age of Victim : 42
 (CMC) Caution and Medical Conditions: 30 - SEXUALLY VIOLENT PREDATOR - CONTACT
 ORI FOR DETAILED INFORMATION
 (CON) Date of Conviction : 19910120
 (COU) County : ESSEX
 (CRR) Conviction Resulting in Registration: RAPE - GUN
 (CTY) City Name : SILVERTOWN
 (DLU) Date Last Update : 20230221 1252 EST
 (DNA) DNA Profile Indicator : N
 (DOB) Date of Birth : 19800215
 (DTE) Date and Time of Entry : 20230221 1252 EST
 (ERD) Ending Registration Date : NONEXP
 (EYE) Eye Color : BR0
 (HAI) Hair Color : BR0
 (HGT) Height : 510
 (MKE) Message Key : SEXUAL OFFENDER - CAUTION
 (NAM) Name : BOND, JAMES
 (NIC) NCIC Number : X750551550
 (OCA) Originating Agency Case : 1998-1234589
 (ORD) Offender Registration Date : 19980301
 (ORI) Originating Agency Identifier : MSMHP0000 ORI IS MISSISSIPPI HIGHWAY
 SAFETY PATROL HQ JACKSON 601 933-2651
 (PLC) Place of Crime : CA
 (RAC) Race : W
 (SEX) Sex : M
 (WGT) Weight : 175

16.0 APPENDIX E - ADMIN MESSAGES FROM MCHS TO A SCANNING STATION

MCHS sends the two administrative messages described in [Section 4.3](#).

A scanning station must use the Post Office Protocol Version 3 (POP3S) to retrieve the messages from MCHS. See the reference documents for more details regarding the POP3S protocol and the format of messages. There should not be any conflict between the requirements in this appendix and the referenced RFCs but, in case of a conflict, the information in this appendix takes precedence over information in the referenced documents.

The POP3S protocol is based on the POP3 protocol but is carried over an SSL/TLS secure connection. Scanning stations using POP3S protocol must connect to host `mscjis.dps.ms.gov` over port 995. Once the SSL/TLS connection is established, normal POP3 exchanges are used.

A scanning station's email address is `station_id@mscjis.dps.ms.gov` where *station id* is the scanning station id assigned by the CIC. This is the same scanning station id that is used in the TCN field.

The POP3S protocol requires a login as part of the session. The login id is the `station_id`.

Email messages consist of two parts: a header and a body. The two parts are separated by a null line indicated by the four ASCII control characters for the sequence 'CR, LF, CR, LF'. The header contains routing and control information about the message and the body contains the message itself. The character case of the initial keyword in each line of the message header is allowed to vary by Internet standards. Thus "FROM:", "from:", "From:", and "FrOm:" are all allowable.

The subject line is always provided in messages sent to the scanning station from MCHS so that scanning station software can easily and reliably determine how to handle each incoming message.

MCHS may send other header lines than those listed in the remainder of this appendix such as Date:, CC:, or BCC:. These can be ignored by the scanning station.

The scanning station must retrieve any and all messages that are sent to its POP3 mail, even if it is a message that is not described in Appendices D and E. The station's processing of administrative messages sent to its POP3 mail must include the following:

- The scanning station must automatically delete all types of messages from the station's POP3 mail file on the MCHS server. The CIC prefers that the scanning station retrieve all messages and delete them on the same day that MCHS sends them. The CIC sets a maximum number of days that messages can remain in the POP3 mail file. Currently, the maximum is **seven** days; however, the CIC may change the maximum. Therefore, the maximum number of days must be configurable. (Deleting POP3 mail messages is generally done using the POP3 mail delete command 'DELE'.)

16.1 E.1 EDIT TABLE DOWNLOAD MESSAGES

Edit table downloads allow the set of valid values for some fields to be updated automatically at a scanning station whenever they change on the MCHS system. This is particularly important for fields such as state statute citations as new statutes are enacted each year and existing statutes are revised.

- The edit tables must be used to populate valid value lists for use by the operator at the scanning station and to validate the transaction before it is sent to MCHS. The table below identifies the edit tables and the fields with which they are to be used. If an edit table is used in a subfield, the group field name is followed by a slash followed by the subfield name.
- A scanning station must automatically update its valid value lists, without human intervention, whenever the scanning station receives an Edit Table Download message and prior to starting the next transaction.
- If the agency has a front-end application that interfaces to the scanning station (such as a booking system), the other application must not override the content of the downloaded edit tables.
- The scanning station operator must not be able to enter any value other than one of the values from the downloaded edit tables.

Edit Table	Must be used for the following field(s)
Agency	1.07 Print Agency ORI (for cardscan only) 1.08 Applicant Agency ORI
AMP or BAND Code	2.084 Amputated or Bandaged / Amputated or Bandaged Code
Arrest Type	2.704 Arrest Type
Country	2.021 Country of Citizenship
Correct Agency	1.08 DOC Agency ORI
Enforce Agency	2.702 Arrest Agency ORI
Enforce Event	2.705 Arrest Charge Set / Action
Eye Color	2.031 Eye Color
Hair Color	2.032 Hair Color This includes the entry for 'ZZDoNotUse'. See the requirement for Type1 field 1.13 Domain Version Number for additional requirements for use of entry 'ZZDoNotUse'.
Misc Number Type	2.017 Miscellaneous Id / Miscellaneous Id Number Type
Name Suffix	2.018 Name / Name Suffix
Place of Birth	2.020 Place of Birth
Race	2.025 Race
Reason Fingerprinted	2.037 Reason Fingerprinted Used only for Civil Applicant Agency APPs (Not used for 'Law Enforcement', Instate Inquiry Only', 'CRIMINAL INQUIRY' or 'Sex Offender Reg')
Severity	2.705 Arrest Charge Set / Severity
Sex	2.024 Sex/Gender
State	2.703 Driver's License / Driver's License State
Statute	2.705 Arrest Charge Set / Citation The description will contain a vertical bar () with a severity after it. This is for informational purposes for the scanning station operator. It is independent of the severity that the operator specifies in 2.705 Arrest Charge Set/Severity. There is no need for the livescan to do anything other than display this information. For example: Statute 49-7-31.1 Hunting - unlawful to hunt deer during gun season without orange vest Misdemeanor
Statute_CIC	2.705 Arrest Charge Set / Citation (for CIC only)
Suffix	2.018 Name / Suffix
Supplement	2.705 Arrest Charge Set / Supplement

Edit Table	Must be used for the following field(s)
Tattoo	2.026 Scars, Marks, and Tattoos / SMT Code 10.040 NCIC Designation Code For example: Tattoo TAT UL ARM Tattoos, Arm, left upper
Yes/No	2.035 Palm Prints Available 2.036 Photo Available

Message Header

The email message header contains the following header lines.

Header Line	Notes
To: station-id -- or -- To: station-id @mscjis.dps.ms.gov - or - To: station-name <station_id @mscjis.dps.ms.gov>	This contains the scanning station id (station_id) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in To: River County SO <ls000000@mscjis.dps.ms.gov>
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>	Note the angle brackets are part of the syntax around the email address.
Subject: EDT	This indicates that the message is an edit table download message.
Content-type: TEXT/PLAIN	
Content-transfer-encoding: 7bit	

Message Body

The message body consists of a series of lines in a fixed format. The lines have a maximum of 172 characters and may be padded on the right end with spaces to this length. The format of each line is

1. A 20 character edit table name. This name may contain multiple words such as 'Eye Color'.
2. A single space.
3. A 30-character value. This may contain one or more words. Leading and trailing spaces must be removed from these values. Do not change the character case of the values. (The maximum length of the value will not be greater than the maximum length of the field(s) that use the table.)
4. A single space.
5. A 120-character description of the value. This may contain multiple words or may be completely empty.

All of the values for a given edit table will appear consecutively. The overall message body is very large, approximately 1 million bytes.

Example

The following is an extracted portion of an edit table download message. Note that the first line in the example is not the SMTPS "From:" line (note the lack of a colon following the word "From"). The true "From:" line is the sixth line. Note also that the hair color and eye color values have been changed to use the ANSI NIST codes for stations

using MCHS ICD version 5.10 or greater. For example, the value for blue eye color is "Blue" prior to version 5.10 and is "BLU" for version 5.10 or greater.

Example: Extracted portion of an edit table download message

From mchs@mscjis.mchs.state.ms.us Mon Apr 16 13:12:26 CDT 2001

... ..

Date: Mon, 16 Apr 2001 13:12:25 -0500

Message-Id: <200104161812.NAA20065@mscjis.mchs.state.ms.us>

... ..

From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

To: scanning station name <ls000000@mscjis.mchs.state.ms.us>

Subject: EDT

... ..

Content-type: TEXT/PLAIN; charset=US-ASCII

Content-Transfer-Encoding: 7bit

Status: RO

Agency	MS0010000	ADAMS COUNTY SO
--------	-----------	-----------------

Agency	MS0010100	NATCHEZ PD
--------	-----------	------------

...

Enforce Agency	MSMHP0800	MS H.P. TROOP K - GULFPORT
----------------	-----------	----------------------------

Enforce Agency	MSMHP0900	MS H.P. TROOP M -
----------------	-----------	-------------------

BROOKHAVEN

Enforce Agency	MSMHP1000	DPS FIREARMS PERMIT
----------------	-----------	---------------------

Enforce Event	Arrest Charge
---------------	---------------

Enforce Event	Charge not forwarded
---------------	----------------------

Enforce Event	Citation charge
---------------	-----------------

Enforce Event	Indictment charge
---------------	-------------------

Eye Color	BLK	Black
-----------	-----	-------

Eye Color	BLU	Blue
-----------	-----	------

Eye Color	BRN	Brown
-----------	-----	-------

Eye Color	GRY	Gray
-----------	-----	------

Eye Color	GRN	Green
-----------	-----	-------

Eye Color	HAZ	Hazel
-----------	-----	-------

Eye Color	XXX	Unknown
-----------	-----	---------

Hair Color	BAL	Bald
------------	-----	------

Hair Color	BLK	Black
------------	-----	-------

Hair Color	BLN	Blond or Strawberry
------------	-----	---------------------

Hair Color	BLU	Blue
------------	-----	------

Hair Color	BRO	Brown
------------	-----	-------

Hair Color	GRY	Gray or Partially Gray
------------	-----	------------------------

Hair Color	GRN	Green
------------	-----	-------

Hair Color	ONG	Orange
------------	-----	--------

Hair Color	PNK	Pink
------------	-----	------

Hair Color	PLE	Purple
------------	-----	--------

Hair Color	RED	Red or Auburn
------------	-----	---------------

Hair Color	SDY	Sandy
------------	-----	-------

Hair Color	XXX	Unknown
------------	-----	---------

Hair Color	ZZDoNotUse	<date and time of download>
Misc Number Type	Alien Reg Nr	Alien Registration Number
Misc Number Type	Bureau Fugitive	Bureau Fugitive Index
Number		
...		


16.2 E.2 ATN BLOCK MESSAGES

Livescans that process arrest transactions must generate arrest tracking numbers (ATNs) that are unique across the MCHS system. To ensure that two different livescans do not inadvertently generate the same ATN, they are managed centrally MCHS by the CIC.

The ATN Block Message was designed so that a livescan station would never be prevented from submitting arrests because its allocated range of ATNs was used up. The concept is as follows.

One ATN Block message contains **two** blocks of ATN numbers. Each block consists of two numbers - lowest ATN and highest ATN - which identify the range of ATNs included in the block.

The following describes the ATN Block process. It refers to the diagram below.

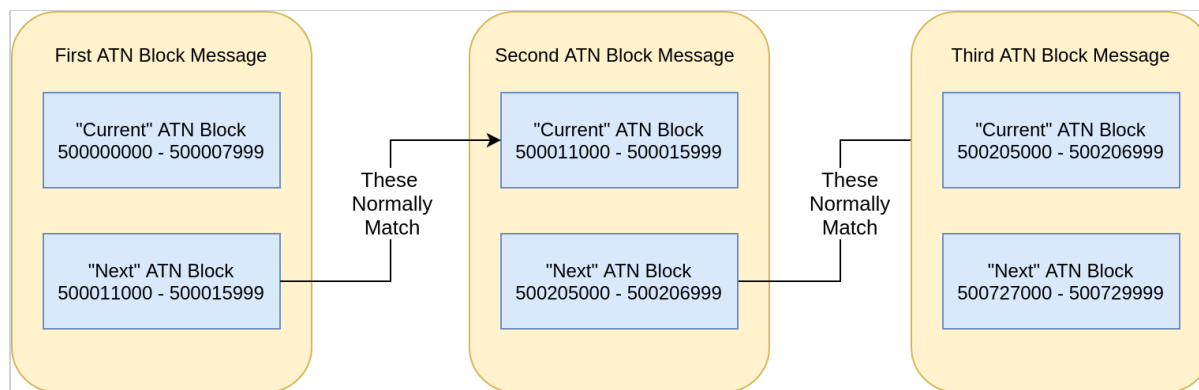

First ATN Block Message: When a livescan is initially set up, the CIC creates and sends the first ATN Block message. This contains the following:

- The "current" block of ATNs - which contains the first block of ATNs that the livescan will use and
- A "next" block of ATNs for the livescan to use when ATNs in the "current" block have been used.

The livescan takes an ATN from the "current" block for each ARR transaction that is created. When the last number in the "current" block is used, the livescan software:

- Makes the "next" block the livescan's "current" block.

Second ATN Block Message: The CIC receives a notification from MCHS that the livescan is using the Next ATN Block. The CIC creates and sends a second ATN Block message for the livescan. This contains the following:

- The "current" block of ATNs - normally this is the same as in the "next" block of the previous ATN Block message and
- A "next" block of ATNs for the livescan to use when all ATNs in the "current" block have been used.

When the livescan receives the second ATN Block message, it will take an ATN from the "current" block for each ARR transaction that is created.

Usually the content of the "current" block of ATNs is the same as the "next" block of the previous ATN Block message. However, the CIC may issue a different ATN range in the "current" block of ATNs than what was in the "next" block of the previous ATN Block message.

The livescan must always use the "current" block as soon as it receives the new ATN Block message. If the "current" block is the same as the "next" block of the previous ATN Block message, the livescan should continue using the block starting after the last ATN number that the livescan used. If the "current" block is different than the "next" block of the previous ATN Block message, the livescan software should start using ATN numbers at the beginning of the "current" block.

When the last number in the "current" block is used, the livescan software:

- Makes the "next" block the livescan's "current" block.

Third ATN Block Message: The CIC receives a notification from MCHS that the livescan is using the Next ATN Block. The CIC creates and sends a third ATN Block message. The message content and process are as described for the second ATN Block Message.

Subsequent ATN Block Messages: The message content and process continue as described for the third ATN Block Message.

Message Header

The email message header must contain the following header lines.

Header Line	Notes
To: <code>station-id</code> - or - To: <code>station-id @mscjis.dps.ms.gov</code> - or - To: <code>station-name</code> < <code>station_id @mscjis.dps.ms.gov</code> >	This contains the scanning station id (<code>station_id</code>) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in To: <code>River County SO</code> < <code>ls000000@mscjis.dps.ms.gov</code> >
From: <code>mchs</code> < <code>mchs@mscjis.mchs.state.ms.us</code> >	Note the angle brackets are part of the syntax around the email address.
Subject: <code>ATN</code>	This indicates that the message is an ATN block message.
Content-type: <code>TEXT/PLAIN</code>	
Content-transfer-encoding: <code>7bit</code>	

Message Body

The message body consists of four lines, each consisting of a single nine-digit number with the following meanings:

- Lowest ATN in the "current" ATN block range
- Highest ATN in the "current" ATN block range
- Lowest ATN in the "next" ATN block range
- Highest ATN in the "next" ATN block

ATNs are consecutive within a range. A range is inclusive of the lowest and highest ATNs in the range.

A check digit must be suffixed (added) to each ATN. The algorithm to determine the check digit is in [Appendix F](#).

Example

The following message shows that the current range of ATNs to be used is from 500000000 through 500007999 and the next range is from 500008000 through 500015999. Note that the first line in the example is not the SMTPS From: line (note the lack of a colon following the word From). The true From: line is the sixth line.

Example: ATN Block Message

```
From mchs@mscjis.mchs.state.ms.us Mon Apr 16 13:29:00 CDT 2001
... ..
Date: Mon, 16 Apr 2001 13:29:00 -0500 (CDT)
Message-Id: <200104161329.NAA20065@mscjis.mchs.state.ms.us>
... ..
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>
To: scanning station name <ls000000>
Subject: ATN
... ..
Content-type: TEXT/PLAIN; charset=US-ASCII
Content-Transfer-Encoding: 7bit
Status: RO
500000000
500007999
500008000
500015999
```

MCHS sends the two administrative messages described in [Section 4.3](#).

A scanning station must use the Post Office Protocol Version 3 (POP3S) to retrieve the messages from MCHS. See the reference documents for more details regarding the POP3S protocol and the format of messages. There should not be any conflict between the requirements in this appendix and the referenced RFCs but, in case of a conflict, the information in this appendix takes precedence over information in the referenced documents.

The POP3S protocol is based on the POP3 protocol but is carried over an SSL/TLS secure connection. Scanning stations using POP3S protocol must connect to host `mscjis.dps.ms.gov` over port 995. Once the SSL/TLS connection is established, normal POP3 exchanges are used.

A scanning station's email address is `station_id@mscjis.dps.ms.gov` where *station id* is the scanning station id assigned by the CIC. This is the same scanning station id that is used in the TCN field.

The POP3S protocol requires a login as part of the session. The login id is the `station_id`.

Email messages consist of two parts: a header and a body. The two parts are separated by a null line indicated by the four ASCII control characters for the sequence 'CR, LF, CR, LF'. The header contains routing and control information about the message and the body contains the message itself. The character case of the initial keyword in each line of the message header is allowed to vary by Internet standards. Thus "FROM:", "from:", "From:", and "FrOm:" are all allowable.

The subject line is always provided in messages sent to the scanning station from MCHS so that scanning station software can easily and reliably determine how to handle each incoming message.

MCHS may send other header lines than those listed in the remainder of this appendix such as Date:, CC:, or BCC:. These can be ignored by the scanning station.

The scanning station must retrieve any and all messages that are sent to its POP3 mail, even if it is a message that is not described in Appendices D and E. The station's processing of administrative messages sent to its POP3 mail must include the following:

- The scanning station must automatically delete all types of messages from the station's POP3 mail file on the MCHS server. The CIC prefers that the scanning station retrieve all messages and delete them on the same day that MCHS sends them. The CIC sets a maximum number of days that messages can remain in the POP3 mail file. Currently, the maximum is **seven** days; however, the CIC may change the maximum. Therefore, the maximum number of days must be configurable. (Deleting POP3 mail messages is generally done using the POP3 mail delete command 'DELE'.)

16.3 E.1 EDIT TABLE DOWNLOAD MESSAGES

Edit table downloads allow the set of valid values for some fields to be updated automatically at a scanning station whenever they change on the MCHS system. This is particularly important for fields such as state statute citations as new statutes are enacted each year and existing statutes are revised.

- The edit tables must be used to populate valid value lists for use by the operator at the scanning station and to validate the transaction before it is sent to MCHS. The table below identifies the edit tables and the fields with which they are to be used. If an edit table is used in a subfield, the group field name is followed by a slash followed by the subfield name.
- A scanning station must automatically update its valid value lists, without human intervention, whenever it receives an Edit Table Download message.
- If the agency has a front-end application that interfaces to the scanning station (such as a booking system), the other application must not override the content of the downloaded edit tables.
- The scanning station operator must not be able to enter any value other than one of the values from the downloaded edit tables.

Edit Table	Must be used for the following field(s)
Agency	1.07 Print Agency ORI (for cardscan only) 1.08 Applicant Agency ORI
AMP or BAND Code	2.084 Amputated or Bandaged / Amputated or Bandaged Code
Arrest Type	2.704 Arrest Type
Country	2.021 Country of Citizenship
Correct Agency	1.08 DOC Agency ORI
Enforce Agency	2.702 Arrest Agency ORI
Enforce Event	2.705 Arrest Charge Set / Action
Eye Color	2.031 Eye Color
Hair Color	2.032 Hair Color This includes the entry for 'ZZDoNotUse'. See the requirement for Type1 field 1.13 Domain Version Number for additional requirements for use of entry 'ZZDoNotUse'.
Misc Number Type	2.017 Miscellaneous Id / Miscellaneous Id Number Type

Edit Table	Must be used for the following field(s)
Name Suffix	2.018 Name / Name Suffix
Place of Birth	2.020 Place of Birth
Race	2.025 Race
Reason Fingerprinted	2.037 Reason Fingerprinted Used only for Civil Applicant Agency APPs (Not used for 'Law Enforcement', Instate Inquiry Only', 'CRIMINAL INQUIRY' or 'Sex Offender Reg')
Severity	2.705 Arrest Charge Set / Severity
Sex	2.024 Sex/Gender
State	2.703 Driver's License / Driver's License State
Statute	2.705 Arrest Charge Set / Citation The description will contain a vertical bar () with a severity after it. This is for informational purposes for the scanning station operator. It is independent of the severity that the operator specifies in 2.705 Arrest Charge Set/Severity. There is no need for the livescan to do anything other than display this information. For example: Statute 49-7-31.1 Hunting - unlawful to hunt deer during gun season without orange vest Misdemeanor
Statute_CIC	2.705 Arrest Charge Set / Citation (for CIC only)
Suffix	2.018 Name / Suffix
Supplement	2.705 Arrest Charge Set / Supplement
Tattoo	2.026 Scars, Marks, and Tattoos / SMT Code 10.040 NCIC Designation Code For example: Tattoo TAT UL ARM Tattoos, Arm, left upper
Yes/No	2.035 Palm Prints Available 2.036 Photo Available

Message Header

The email message header contains the following header lines.

Header Line	Notes
To: <i>station-id</i> -- or -- To: <i>station-id @mscjis.dps.ms.gov</i> - or - To: <i>station-name <station_id @mscjis.dps.ms.gov></i>	This contains the scanning station id (station_id) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in To: River County SO <ls000000@mscjis.dps.ms.gov>
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>	Note the angle brackets are part of the syntax around the email address.
Subject: EDT	This indicates that the message is an edit table download message.
Content-type: TEXT/PLAIN	
Content-transfer-encoding: 7bit	

Message Body

The message body consists of a series of lines in a fixed format. The lines have a maximum of 172 characters and may be padded on the right end with spaces to this length. The format of each line is

1. A 20 character edit table name. This name may contain multiple words such as 'Eye Color'.
2. A single space.
3. A 30-character value. This may contain one or more words. Leading and trailing spaces must be removed from these values. Do not change the character case of the values. (The maximum length of the value will not be greater than the maximum length of the field(s) that use the table.)
4. A single space.
5. A 120-character description of the value. This may contain multiple words or may be completely empty.

All of the values for a given edit table will appear consecutively. The overall message body is very large, approximately 1 million bytes.

Example

The following is an extracted portion of an edit table download message. Note that the first line in the example is not the SMTPS "From:" line (note the lack of a colon following the word "From"). The true "From:" line is the sixth line. Note also that the hair color and eye color values have been changed to use the ANSI NIST codes for stations using MCHS ICD version 5.10 or greater. For example, the value for blue eye color is "Blue" prior to version 5.10 and is "BLU" for version 5.10 or greater.

Example: Extracted portion of an edit table download message

```

From mchs@mscjis.mchs.state.ms.us Mon Apr 16 13:12:26 CDT 2001
... ..
Date: Mon, 16 Apr 2001 13:12:25 -0500
Message-Id: <200104161812.NAA20065@mscjis.mchs.state.ms.us>
... ..
From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

```


To: scanning station name <ls000000@mscjis.mchs.state.ms.us>

Subject: EDT

... ..

Content-type: TEXT/PLAIN; charset=US-ASCII

Content-Transfer-Encoding: 7bit

Status: RO

Agency	MS0010000	ADAMS COUNTY SO
Agency	MS0010100	NATCHEZ PD

...

Enforce Agency	MSMHP0800	MS H.P. TROOP K - GULFPORT
Enforce Agency	MSMHP0900	MS H.P. TROOP M -

BROOKHAVEN

Enforce Agency	MSMHP1000	DPS FIREARMS PERMIT
----------------	-----------	---------------------

Enforce Event Arrest Charge

Enforce Event Charge not forwarded

Enforce Event Citation charge

Enforce Event Indictment charge

Eye Color	BLK	Black
-----------	-----	-------

Eye Color	BLU	Blue
-----------	-----	------

Eye Color	BRN	Brown
-----------	-----	-------

Eye Color	GRY	Gray
-----------	-----	------

Eye Color	GRN	Green
-----------	-----	-------

Eye Color	HAZ	Hazel
-----------	-----	-------

Eye Color	XXX	Unknown
-----------	-----	---------

Hair Color	BAL	Bald
------------	-----	------

Hair Color	BLK	Black
------------	-----	-------

Hair Color	BLN	Blond or Strawberry
------------	-----	---------------------

Hair Color	BLU	Blue
------------	-----	------

Hair Color	BRO	Brown
------------	-----	-------

Hair Color	GRY	Gray or Partially Gray
------------	-----	------------------------

Hair Color	GRN	Green
------------	-----	-------

Hair Color	ONG	Orange
------------	-----	--------

Hair Color	PNK	Pink
------------	-----	------

Hair Color	PLE	Purple
------------	-----	--------

Hair Color	RED	Red or Auburn
------------	-----	---------------

Hair Color	SDY	Sandy
------------	-----	-------

Hair Color	XXX	Unknown
------------	-----	---------

Hair Color	ZZDoNotUse	<date and time of
------------	------------	-------------------

download>

Misc Number Type	Alien Reg Nr	Alien Registration Number
------------------	--------------	---------------------------

Misc Number Type	Bureau Fugitive	Bureau Fugitive Index
------------------	-----------------	-----------------------

Number

...


16.4 E.2 ATN BLOCK MESSAGES

Livescans that process arrest transactions must generate arrest tracking numbers (ATNs) that are unique across the MCHS system. To ensure that two different livescans do not inadvertently generate the same ATN, they are managed centrally MCHS by the CIC.

The ATN Block Message was designed so that a livescan station would never be prevented from submitting arrests because its allocated range of ATNs was used up. The concept is as follows.

One ATN Block message contains **two** blocks of ATN numbers. Each block consists of two numbers - lowest ATN and highest ATN - which identify the range of ATNs included in the block.

The following describes the ATN Block process. It refers to the diagram below.

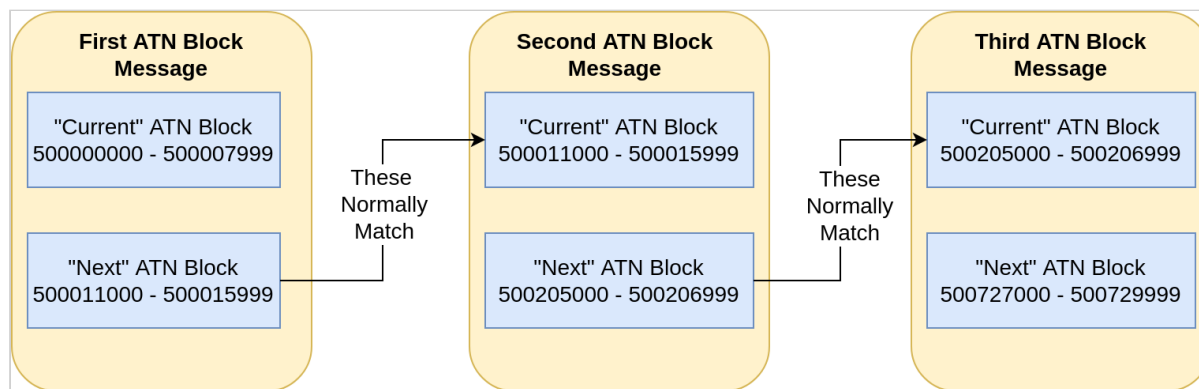

First ATN Block Message: When a livescan is initially set up, the CIC creates and sends the first ATN Block message. This contains the following:

- The "current" block of ATNs - which contains the first block of ATNs that the livescan will use and
- A "next" block of ATNs for the livescan to use when ATNs in the "current" block have been used.

The livescan takes an ATN from the "current" block for each ARR transaction that is created. When the last number in the "current" block is used, the livescan software:

- Makes the "next" block the livescan's "current" block.

Second ATN Block Message: The CIC receives a notification from MCHS that the livescan is using the Next ATN Block. The CIC creates and sends a second ATN Block message for the livescan. This contains the following:

- The "current" block of ATNs - normally this is the same as in the "next" block of the previous ATN Block message and
- A "next" block of ATNs for the livescan to use when all ATNs in the "current" block have been used.

When the livescan receives the second ATN Block message, it will take an ATN from the "current" block for each ARR transaction that is created.

Usually the content of the "current" block of ATNs is the same as the "next" block of the previous ATN Block message. However, the CIC may issue a different ATN range in the "current" block of ATNs than what was in the "next" block of the previous ATN Block message.

The livescan must always use the "current" block as soon as it receives the new ATN Block message. If the "current" block is the same as the "next" block of the previous ATN Block message, the livescan should continue using the block starting after the last ATN number that the livescan used. If the "current" block is different than the "next" block of the

previous ATN Block message, the livescan software should start using ATN numbers at the beginning of the "current" block.

When the last number in the "current" block is used, the livescan software:

- Makes the "next" block the livescan's "current" block.

Third ATN Block Message: The CIC receives a notification from MCHS that the livescan is using the Next ATN Block. The CIC creates and sends a third ATN Block message. The message content and process are as described for the second ATN Block Message.

Subsequent ATN Block Messages: The message content and process continue as described for the third ATN Block Message.

Message Header

The email message header must contain the following header lines.

Header Line	Notes
To: <i>station-id</i> - or - To: <i>station-id @mscjis.dps.ms.gov</i> - or - To: <i>station-name</i> < <i>station_id @mscjis.dps.ms.gov</i> >	This contains the scanning station id (station_id) as assigned by the CIC. The email address may or may not contain an @ sign followed by a host name. Note the angle brackets are part of the syntax around the email address. May also include a descriptive name as in To: River County SO <ls0000000@mscjis.dps.ms.gov>
From: mchs <mchs@mscjis.mchs.state.ms.us>	Note the angle brackets are part of the syntax around the email address.
Subject: ATN	This indicates that the message is an ATN block message.
Content-type: TEXT/PLAIN	
Content-transfer-encoding: 7bit	

Message Body

The message body consists of four lines, each consisting of a single nine-digit number with the following meanings:

- Lowest ATN in the "current" ATN block range
- Highest ATN in the "current" ATN block range
- Lowest ATN in the "next" ATN block range
- Highest ATN in the "next" ATN block

ATNs are consecutive within a range. A range is inclusive of the lowest and highest ATNs in the range.

A check digit must be suffixed (added) to each ATN. The algorithm to determine the check digit is in [Appendix F](#).

Example

The following message shows that the current range of ATNs to be used is from 500000000 through 500007999 and the next range is from 500008000 through 500015999. Note that the first line in the example is not the SMTPS From: line (note the lack of a colon following the word From). The true From: line is the sixth line.

Example: ATN Block Message

From mchs@mscjis.mchs.state.ms.us Mon Apr 16 13:29:00 CDT 2001

... ..

Date: Mon, 16 Apr 2001 13:29:00 -0500 (CDT)

Message-Id: <200104161329.NAA20065@mscjis.mchs.state.ms.us>

... ..

From: "MCHS" <mchs@mscjis.mchs.state.ms.us>

To: scanning station name <ls000000>

Subject: ATN

... ..

Content-type: TEXT/PLAIN; charset=US-ASCII

Content-Transfer-Encoding: 7bit

Status: RO

5000000000

500007999

500008000

500015999

17.0 APPENDIX F - ATN CHECK DIGIT ALGORITHM

The check digit algorithm is applied to the nine digit ATN base of Field 2.701 ATN #. The full ATN is the original nine-digit number from the assigned ATN number range with the check digit appended for a total of 10 characters. The check digit may be 'X' so the resulting ATN must be treated as a character string, not a number.

1. Set sum to 0.
2. Set multiplier to 2.
3. For each digit in number proceeding from right to left loop
4. Increase sum by the product of multiplier and the digit value.
5. Increase multiplier by 1.
6. End loop
7. Set remainder to the integer remainder of sum divided by 11.
8. Set check to 11 minus the remainder.
9. If check is 11 then return 0 as the check digit..
10. If check is 10 then return X as the check digit.
11. Otherwise, return check as the check digit.

Examples of check digit calculations, using a maximum of nine digits, are shown in the table below.

Input String	Sum	Remainder	Check Digit
000000000	0	0	0
111111111	54	10	1
123456789	210	1	X
29725	101	2	9
989064850	337	7	4
889700023	285	10	1

The following listing shows the MCHS implementation of the algorithm for the ATN check digit in a PostgreSQL stored procedure. It is provided in case it is useful to see an operational implementation. This software will validate check digits ATN fields in ARR transaction sent to MCHS.

modulus_11 algorithm

```
/* *****  
* Module:      modulus_11  
* Created:     July 23, 1997  
* Description: This function generates the mod-11 check digit from  
*              a numeric string. It receives a string as input and  
*              returns a single alpha character. An exception is raised  
*              if the input string is null or contains a non-numeric  
*              character. Check digit validation is required for the  
*              Arrest Tracking Number (ATN). This function  
*              implements the algorithm used by Moore Business Forms  
*              to print the MCHS Arrest Fingerprint Cards. That algorithm  
*              is stated to be the algorithm used by the State of Texas.  
* *****
```

```

*
*****/
CREATE OR REPLACE FUNCTION public.modulus_11(the_string character varying)
    RETURNS character varying
    LANGUAGE plpgsql
    AS $function$

DECLARE

the_sum integer;
the_weight integer;
the_length integer;
the_digit integer;
the_mod integer;
the_char char(1);
os integer;

BEGIN

/*
    Obtain the length of the input string and set the position counter
    to that value. Initialize the sum to zero and the weight to 2.
*/

the_length := length(the_string);
os := the_length;
the_sum := 0;
the_weight := 2;

/*
    If the input string is null, raise an exception and exit.
*/

if the_string is null
then
    raise exception 'Null value passed to MODULUS_11 function.';
end if;

/*
    Now start with the rightmost character in the string and loop backwards
    through the string, incrementing the sum for each character in the
    string.
*/

loop

/*
    Begin by converting the current digit to a number. If that conversion
    fails, raise an exception and exit.
*/

```

```

BEGIN
the_digit := to_number(substr(the_string,os,1), '9');
EXCEPTION
when others then
    raise exception 'Non-numeric digit % in input %. ',
                    substr(the_string,os,1),
                    the_string;

END;

/*
Each digit is multiplied by the position-number, where
the rightmost digit has position number 2. The position-number has been
initialized to 2 and will be incremented for each iteration through the
loop. First, increment the sum by the product of the current digit
and the current position. Then, add 1 to the current weight in
preparation for the next iteration. Then, decrement the position
counter by 1. If the counter is then at zero, then the leftmost digit
has just been processed. Exit the loop without further processing.
*/

the_sum := the_sum (the_digit * the_weight);
the_weight := the_weight 1;
os := os - 1;
if os <= 0
    then
        exit;
    end if;

end loop;

/*
Now, divide the sum by 11 and then subtract the remainder from 11.
*/

the_mod := 11 - mod(the_sum,11);

/*
The result of the computation above is mapped to yield the
check character. Note that this mapping must contain 11 values
to accommodate the case that the sum is evenly divisible by 11 and the
remainder is thus zero.
*/

if the_mod < 10 then
    the_char := the_mod;
else
    if the_mod = 10 then
        the_char := 'X';

```

```

    else
        the_char := '0';
    end if;
end if;

/*
    Return the result of the table lookup and exit.
*/

return the_char;

EXCEPTION

when others
    then
        raise exception 'Internal error in function MODULUS_11.';

END;

$function$

```

The following code shows an implementation in python:

Mod 11 Implementation in Python

```

def mod_11(number):
    """Perform the mod-11 calculation on a number and return the check character"""
    z9 = number % 10
    number = number//10
    z8 = number % 10
    number = number//10
    z7 = number % 10
    number = number//10
    z6 = number % 10
    number = number//10
    z5 = number % 10
    number = number//10
    z4 = number % 10
    number = number//10
    z3 = number % 10
    number = number//10
    z2 = number % 10
    number = number//10
    z1 = number
    sum = z1+2*z2+3*z3+4*z4+5*z5+6*z6+7*z7+8*z8+9*z9
    checkdigit = sum%11
    if checkdigit == 10:
        checkdigit = "X"
    else:
        checkdigit = str(checkdigit)

```


`return` checkdigit

18.0 APPENDIX G - SAMPLE TRANSACTIONS WITH TYPE 1, 2, AND 4 RECORDS

This appendix contains examples of Type 1, Type 2, and Type 4 records in ARR, APP, and DOC transactions. The purpose of the appendix is as an aid to a scanning station vendor in determining whether transactions are being properly formatted in accordance with Appendices A and B and then properly encoded as email messages according to Appendix C.

18.1 G.1 ARREST TRANSACTION

A sample of an ARR transaction is shown in this appendix. Appendix G.1.1 lists the contents of the Type 1, Type 2, and Type 4 records of the transaction. The transaction includes 14 Type 4 records, each with an image field, which for sample purposes only, consists of a single zero byte.

Appendix G.1.2 shows the non-binary fields of the transaction defined in G.1.1 in NIST-2011 format, including the record separators.

Appendix G.1.3 shows a complete email message containing the transaction from Appendix G.1.1. The transaction is very short because of the small size of the Type 4 test records. Ordinarily, a transaction with 14 finger print images is more than 650,000 bytes in size before Base64 encoding and 860,000 bytes after encoding.

Field n.01 Record Header is calculated by the scanning station software. It is the length of the record, including field n.01, in bytes.

"(no data)" indicates that no data is in the subfield and is therefore null.

18.1.1 ARR Transaction Field Contents

	<i>Value</i>
Type 1 Record:	
Record Header 1.01 (len)	194 (Calculated)
Version Number 1.02 (ver)	0510
File Contents 1.03 (cnt)	–
First Record Category Code (Record Category Code (0))	1
Content Record Count (Information Designation Character (0))	15
Record Category Code (1)	2
Information Designation Character (1)	0
Record Category Code (2)	4
Information Designation Character (2)	1
Record Category Code (3)	4
Information Designation Character (3)	2

	Value
Record Category Code (4)	4
Information Designation Character (4)	3
Record Category Code (5)	4
Information Designation Character (5)	4
Record Category Code (6)	4
Information Designation Character (6)	5
Record Category Code (7)	4
Information Designation Character (7)	6
Record Category Code (8)	4
Information Designation Character (8)	7
Record Category Code (9)	4
Information Designation Character (9)	8
Record Category Code (10)	4
Information Designation Character (10)	9
Record Category Code (11)	4
Information Designation Character (11)	10
Record Category Code (12)	4
Information Designation Character (12)	11
Record Category Code (13)	4
Information Designation Character (13)	12
Record Category Code (14)	4
Information Designation Character (14)	13
Record Category Code (15)	4
Information Designation Character (15)	14
Type of Transaction 1.04 (tot)	ARR
Transaction Date 1.05 (dat)	20020405
Print Agency ORI 1.07 (dai)	MS0000000
Arrest/Applicant/DOC Agency ORI 1.08 (ori)	MS0000000

	Value
Transaction Control Number 1.09 (tcn)	Is000000-20150315-0025
Native Scanning Res. 1.11 (nsr)	19.69
Nominal Transmitting Res. 1.12 (ntr)	19.69
Domain Version 1.13	
Domain Name	MCHS
Domain Version Number	2020-10-07 14:09:04 CDT
Type 2 Record:	
Record Header 2.001 (len)	680 (Calculated)
Information Designation Character 2.002 (idc)	0
Originating Agency Case # 2.009	02-123456
Social Security # (0) 2.016	123456789
Social Security # (1) 2.016	987654321
Miscellaneous Id # 2.017	–
Misc Id # Type (0)	Natl Agency Nr
Misc Id # Value (0)	12-X45
Name 2.018	–
Last Name (0)	POTTER
First Name (0)	HAROLD
Middle Name (0)	ALBERT
Name Suffix (0)	JR
Place of Birth 2.020	YY
Country of Citizenship 2.021	EN

	Value
Date of Birth (0) 2.022	19800831
Sex/Gender 2.024	Male
Race 2.025	White
Scars, Marks, and Tattoos 2.026	–
SMT Code (0)	SC FHD
SMT Description (0)	LIGHTNING BOLT
SMT Code (1)	TAT UL ARM
SMT Description (1)	Owl
Height 2.027	507
Weight 2.029	130
Eye Color 2.031	HAZ
Hair Color 2.032	BRO
Palm Prints Available 2.035	Yes
Photo Available 2.036	No
Date Printed 2.038	20020405
Employment 2.039	–
Occupation	Construction
Employer Name	Reynolds Corp.
Employer Address 1	(no data)
Employer Address 2	Suite 45
Employer Address 3	Riverville, MS 22222
Residence 2.041	–

	Value
Residence Address 1	200 Side Street
Residence Address 2	Apt. 40
Residence Address 3	Riverville, MS 22225
Date of Arrest 2.045	20020405
Caution Comments 2.056	Uses a Nimbus 2000 broomstick
Image Capture Equipment 2.067	–
Equipment Make	Scanner Maker
Equipment Model	9000
Equipment Serial #	00001
Arrest Tracking # 2.701	8800000002
Arrest Agency ORI 2.702	MS0000000
Driver's License 2.703	–
Driver's License State	MS
Driver's License #	111-333-666
Arrest Type 2.704	Adult
Arrest Charge Set (0) 2.705	–
Citation (0)	49-7-31(1)(vi)
Charge Description (0)	Hunting without an orange vest
Supplement (0)	Conspiracy
Severity (0)	Misdemeanor
# Counts (0)	2
Date of Offense (0)	20020401
Action (0)	Arrest Charge
Charge Remarks (0)	Remark for Charge 1
Type 4 Records:	14 records with IDC values from 1 to 14

	Value
Record Header (len)	19
Information Designation Character (idc)	1 through 14
Impression Type (imp)	1 for finger positions 1-10; 0 for finger positions 11-14
Finger Position (fgp)	1 through 14 in the first position followed by 5 bytes of -1
Image Scanning Resolution (isr)	1
Horizontal Line Length (hll)	700 for finger positions 1-10 and 13-14; 500 for finger positions 11-12
Vertical Line Length (vll)	700
Compression Algorithm (gca)	1
Image Data (data)	<a one byte image with a value of 0>

18.1.2 ARR Non-Binary Field Format

Example: ARR Non-Binary Field Format

Type 1 record:

```

1.01:194<GS>
1.02:0510<GS>
1.03:1<US>15<RS>2<US>0<RS>4<US>1<RS>4<US>2<RS>4<US>3<RS>4<US>4<RS>
      4<US>5<RS>4<US>6<RS>4<US>7<RS>4<US>8<RS>4<US>9<RS>4<US>10<RS>
      4<US>11<RS>4<US>12<RS>4<US>13<RS>4<US>14<GS>
1.04:ARR<GS>
1.05:20020405<GS>
1.07:MS00000000<GS>
1.08:MS00000000<GS>
1.09:ls000000-20150315-0025<GS>
1.11:19.69<GS>
1.12:19.69<GS>
1.13:MCHS<US>2020-10-07 14:09:04 CDT<FS>

```

Type 2 record:

```

2.001:680<GS>
2.002:0<GS>
2.009:02-123456<GS>
2.016:123456789<RS>987654321<GS>
2.017:Natl Agency Nr<US>12-X45<GS>
2.018:POTTER<US>HAROLD<US>ALBERT<US>JR<GS>
2.020:YY<GS>
2.021:EN<GS>
2.022:19800831<GS>

```

```

2.024:Male<GS>
2.025:White<GS>
2.026:SC FHD<US>LIGHTNING BOLT<RS>TAT UL ARM<US>Owl<GS>
2.027:507<GS>
2.029:130<GS>
2.031:HAZ<GS>
2.032:BRO<GS>
2.035:Yes<GS>
2.036:No<GS>
2.038:20020405<GS>
2.039:Construction<RS>Reynolds Corp.<RS><RS>Suite 45<RS>Riverville, MS
22222<GS>
2.041:200 Side Street<RS>Apt. 40<RS>Riverville, MS 22225<GS>
2.045:20020405<GS>
2.056:Uses a Nimbus 2000 broomstick<GS>
2.067:LiveScan Maker<RS>9000<RS>00001<GS>
2.701:88000000002<GS>
2.702:MS00000000<GS>
2.703:MS<US>111-333-666<GS>
2.704:Adult<GS>
2.705:49-7-31(1)(vi)<US>Hunting without an orange
vest<US>Conspire<US>Misdemeanor<US>2<US>20020401<US>Arrest Charge<US>Remark for
charge 1<FS>

```

18.1.3 ARR MIME Email Message Format

Example: ARR MIME Email Message Format

```

From ls0000000@mscjis.dps.ms.gov Tue Apr 15 11:27:01 2003
... ..
Date: Tue, 15 Apr 2003 11:27:01 -0400 (EDT)
Message-Id: <201409011024.NAA20055@mscjis.dps.ms.gov>
... ..
From: Livescan <ls0000000@mscjis.dps.ms.gov>
To: <controller@mscjis.dps.ms.gov>
Subject: ARR; 88000000002; POTTER, HAROLD; 19800831; L
... ..
Mime-Version: 1.0
Content-Type: application/octet-stream
Content-Transfer-Encoding: base64

MS4wMT0xOTQdMS4wMjowNTAyHTEuMDM6MR8xNR4yHzAeNB8xHjQfMh40HzMeNB80HjQfNR40HzYe
NB83HjQfOB40HzkeNB8xMB40HzExHjQfMTIeNB8xMx40HzE0HTEuMDQ6QVJSHTeU6MjAwMjA0
MDUdMS4wNzpnUzAwMDAwMDAdMS4wODpUzAwMDAwMDAdMS4wOTpDRVJULWxzMDAwMDAwLUFSUj0x
HTEuMTE6MTkuNjkdMS4xMjoxOS42ORwyLjAwMT02ODAdMi4wMDI6MB0yLjAwOTowMi0xMjMONTYd
Mi4wMTY6MTIzNDU2Nzg5Hjk4NzY1NDMyMR0yLjAxNzpoYXRrSIEFnZW5jeSB0ch8xMi1YNDUdMi4w

```



```
MTg6UE9UVEVSH0hBUK9MRB9BTEJFULQfSLIdMi4wMjA6WVkdMi4wMjE6RU4dMi4wMjI6MTk4MDA4
MzEdMi4wMjQ6TWFsZR0yLjA0NTpXaGl0ZR0yLjA0NTpTQyBGSEQfTElHSFR0SU5HIEJPTTFQeVEFU
IFVMIEFSTR9Pd2wdMi4wMjc6NTA3HTIuMDI5OjEzMB0yLjAzMTpIYXplbB0yLjAzMjpCcm93bh0y
LjAzNTpZZXMdMi4wMzY6Tm8dMi4wMzg6MjAwMjA0MDUdMi4wMzk6Q29uc3RydWN0aw9uHlJleW5v
bGRzIENvcnAuHh5TdWl0ZSA0NR5SaXZlcnZpbGxlLCBNUyAyMjIyMh0yLjA0MT0yMDAgU2lkZSBT
dHJlZXQeQXB0LiA0MB5SaXZlcnZpbGxlLCBNUyAyMjIyNR0yLjA0NT0yMDAyMDQwNR0yLjA1Njpv
c2VzIGEgTmItYnVzIDIwMDAgYnJvb21zdGJjYX0yLjA2NzpmXzLU2NhbiBNYWtlch45MDAwHjAw
MDAxHTIuNzAxOjgwMDAwMDAwMDIdMi43MDI6TVMwMDAwMDAwHTIuNzAzOk1THzExMS0zMzMtNjY2
HTIuNzA0OkFkdWx0HTIuNzA1OjQ5LTctMzEoMSkodmKpH0h1bnRpbmcgd2l0aG91dCBhbiBvcnFu
Z2UgdMvZdB9Db25zcGlyYWN5H01pc2RlbWVhbm9yHzIfMjAwMjA0MDEfQXJyZXN0IENoYXJnZR9S
ZW1hcmsgZm9yIGNoYXJnZSAxHAAAABMBAQE/Pz8/PwECPwI/AQAAAAATAgECPz8/Pz8BAj8CPwEA
AAAAEwMBAz8/Pz8/AQI/Aj8BAAAAABMEAQQ/Pz8/PwECPwI/AQAAAAATBQEFPz8/Pz8BAj8CPwEA
AAAAEwYBBj8/Pz8/AQI/Aj8BAAAAABMHAQc/Pz8/PwECPwI/AQAAAAATCAEIPz8/Pz8BAj8CPwEA
AAAAEwkBCT8/Pz8/AQI/Aj8BAAAAABMKAQo/Pz8/PwECPwI/AQAAAAATCwALPz8/Pz8BAT8DPwEA
AAAAEwwADD8/Pz8/AQE/Az8BAAAAABMNAA0/Pz8/PwEGQAM/AQAAAAATDgAOPz8/Pz8BBkADPwEA
```

18.2 G.2 APPLICANT TRANSACTION

A sample of an APP transaction is shown in this appendix. Appendix G.2.1 lists the contents of the Type 1, Type 2, and Type 4 records of the transaction. The transaction includes 14 Type 4 records, each with an image field, which for sample purposes only, consists of a single zero byte.

Appendix G.2.2 shows the non-binary fields of the transaction defined in G.2.1 in NIST-2011 format, including the record separators.

Appendix G.2.3 shows a complete email message containing the transaction from Appendix G.2.1. The transaction is very short because of the small size of the Type 4 test records. Ordinarily, a transaction with 14 finger print images is more than 650,000 bytes in size before Base64 encoding and 860,000 bytes after encoding.

Field n.01Record Header is calculated by the scanning station software. It is the length of the record, including field n.01, in bytes.

"(no data)" indicates that no data is in the subfield and is therefore null.

18.2.1 APP Transaction Field Contents

	<i>Value</i>
Type 1 Record:	
Record Header 1.01 (len)	194 (Calculated)
Version Number 1.02 (ver)	0510
File Contents 1.03 (cnt)	–
First Record Category Code (Record Category Code (0))	1

	Value
Content Record Count (Information Designation Character (0))	15
Record Category Code (1)	2
Information Designation Character (1)	0
Record Category Code (2)	4
Information Designation Character (2)	1
Record Category Code (3)	4
Information Designation Character (3)	2
Record Category Code (4)	4
Information Designation Character (4)	3
Record Category Code (5)	4
Information Designation Character (5)	4
Record Category Code (6)	4
Information Designation Character (6)	5
Record Category Code (7)	4
Information Designation Character (7)	6
Record Category Code (8)	4
Information Designation Character (8)	7
Record Category Code (9)	4
Information Designation Character (9)	8
Record Category Code (10)	4
Information Designation Character (10)	9
Record Category Code (11)	4
Information Designation Character (11)	10
Record Category Code (12)	4
Information Designation Character (12)	11
Record Category Code (13)	4
Information Designation Character (13)	12
Record Category Code (14)	4
Information Designation Character (14)	13

	Value
Record Category Code (15)	4
Information Designation Character (15)	14
Type of Transaction 1.04 (tot)	APP
Transaction Date 1.05 (dat)	20020405
Print Agency ORI 1.07 (dai)	MS0000000
Arrest/Applicant/DOC Agency ORI 1.08 (ori)	MS0000000
Transaction Control Number 1.09 (tcn)	ls000000-20150315-6775
Native Scanning Res. 1.11 (nsr)	19.69
Nominal Transmitting Res. 1.12 (ntr)	19.69
Domain Version 1.13	
Domain Name	MCHS
Domain Version Number	2020-10-07 14:09:04 CDT
Type 2 Record:	
Record Header 2.001 (len)	527 (Calculated)
Information Designation Character 2.002 (icd)	0
Originating Agency Case # 2.009	02-123456
Social Security # 2.016	123456789
Miscellaneous Id # 2.017	-
Misc Id # Type (0)	Natl Agency Nr
Misc Id # Value (0)	12-X45
Misc Id # Type (1)	Passport Nr
Misc Id # Value (1)	1234567000

	Value
Name 2.018	–
Last Name (0)	POTTER
First Name (0)	HAROLD
Middle Name (0)	JAMES
Name Suffix (0)	
Last Name (1)	HARRY
First Name (1)	X
Middle Name (1)	
Name Suffix (1)	
Place of Birth 2.020	YY
Country of Citizenship 2.021	EN
Date of Birth 2.022	19800831
Sex/Gender 2.024	Male
Race 2.025	White
Scars, Marks, and Tattoos 2.026	–
SMT Code (0)	SC FHD
SMT Description (0)	LIGHTNING BOLT
Height 2.027	507
Weight 2.029	130
Eye Color 2.031	GRN
Hair Color 2.032	BLK
Reason Fingerprinted 2.037	Law Enforcement

	Value
Date Printed 2.038	20020405
Employment 2.039	–
Occupation	Wizard
Employer Name	Wizards Ltd
Employer Address 1	234 River St.
Employer Address 2	Suite 45
Employer Address 3	Riverville, MS 22222
Residence 2.041	–
Residence Address 1	200 Side Street
Residence Address 2	(no data)
Residence Address 3	Riverville, MS 22225
Image Capture Equipment 2.067	–
Equipment Make	Scanner Maker
Equipment Model	9000
Equipment Serial #	00001
Driver's License 2.703	–
Driver's License State	MS
Driver's License #	111-333-666
Response Address 2.707	–
Response Addressee	Severus Snape
Response Address 1	(no data)
Response Address 2	(no data)
Response Address 3	Hogwarts Castle, Wales
Response Phone #	222-111-4444
Type 4 Records:	14 records with IDC values from 1 to 14
Record Header (len)	19

	Value
Information Designation Character (idc)	1 through 14
Impression Type (imp)	1 for finger positions 1-10; 0 for finger positions 11-14
Finger Position (fgp)	1 through 14 in the first position followed by 5 bytes of -1
Image Scanning Resolution (isr)	1
Horizontal Line Length (hll)	700 for finger positions 1-10 and 13-14; 500 for finger positions 11-12
Vertical Line Length (vll)	700
Compression Algorithm (gca)	1
Image Data (data)	<a one byte image with a value of 0>

18.2.2 APP Non-Binary Field Format

Example: APP Non-Binary Field Format

Type 1 record:

```

1.01:194<GS>
1.02:0510<GS>
1.03:1<US>15<RS>2<US>0<RS>4<US>1<RS>4<US>2<RS>4<US>3<RS>4<US>4<RS>
      4<US>5<RS>4<US>6<RS>4<US>7<RS>4<US>8<RS>4<US>9<RS>4<US>10<RS>
      4<US>11<RS>4<US>12<RS>4<US>13<RS>4<US>14<GS>
1.04:APP<GS>
1.05:20020405<GS>
1.07:MS00000000<GS>
1.08:MS00000000<GS>
1.09:ls0000000-20150315-6775<GS>
1.11:19.69<GS>
1.12:19.69<GS>
1.13:MCHS<US>2020-10-07 14:09:04 CDT<FS>

```

Type 2 record:

```

2.001:527<GS>
2.002:0<GS>
2.009:02-123456<GS>
2.016:123456789<GS>
2.017:Nat'l Agency Nr<US>12-X45<RS>Passport Nr<US>1234567000<GS>
2.018:POTTER<US>HAROLD<US>JAMES<US><RS>HARRY<US>X<US><US><GS>
2.020:YY<GS>
2.021:EN<GS>
2.022:19800831<GS>
2.024:Male<GS>

```



```

AAATBQEFpz8/Pz8BAj8CPwEAAAAAEwYBBj8/Pz8/AQI/Aj8BAAAAABMHAQc/Pz8/PwECPwI/AQAA
AAATCAEIPz8/Pz8BAj8CPwEAAAAAEwkBCT8/Pz8/AQI/Aj8BAAAAABMKAQo/Pz8/PwECPwI/AQAA
AAATCwALPz8/Pz8BAT8DPwEAAAAAEwwADD8/Pz8/AQE/Az8BAAAAABMNAA0/Pz8/PwEGQAM/AQAA
AAATDgAOPz8/Pz8BBkADPwEA

```

18.3 G.3 DOC INMATE RECEIPT TRANSACTION

A sample of a DOC transaction is shown in this appendix. Appendix G.3.1 lists the contents of the Type 1, Type 2, and Type 4 records of the transaction. The transaction includes 14 Type 4 records, each with an image field, which for sample purposes only, consists of a single zero byte.

Appendix G.3.2 shows the non-binary fields of the transaction defined in G.3.1 in NIST-2011 format, including the record separators.

Appendix G.3.3 shows a complete email message containing the transaction from Appendix G.3.1. The transaction is very short because of the small size of the Type 4 test records. Ordinarily, a transaction with 14 finger print images is more than 650,000 bytes in size before Base64 encoding and 860,000 bytes after encoding

Field n.01Record Header is calculated by the scanning station software. It is the length of the record, including field n.01, in bytes.

"(no data)" indicates that no data is in the subfield and is therefore null.

18.3.1 DOC Transaction Field Contents

	<i>Value</i>
Type 1 Record:	
Record Header 1.01 (len)	194 (Calculated)
Version Number 1.02 (ver)	0510
File Contents 1.03 (cnt)	–
First Record Category Code (Record Category Code (0))	1
Content Record Count (Information Designation Character (0))	15
Record Category Code (1)	2
Information Designation Character (1)	0
Record Category Code (2)	4
Information Designation Character (2)	1
Record Category Code (3)	4
Information Designation Character (3)	2

	Value
Record Category Code (4)	4
Information Designation Character (4)	3
Record Category Code (5)	4
Information Designation Character (5)	4
Record Category Code (6)	4
Information Designation Character (6)	5
Record Category Code (7)	4
Information Designation Character (7)	6
Record Category Code (8)	4
Information Designation Character (8)	7
Record Category Code (9)	4
Information Designation Character (9)	8
Record Category Code (10)	4
Information Designation Character (10)	9
Record Category Code (11)	4
Information Designation Character (11)	10
Record Category Code (12)	4
Information Designation Character (12)	11
Record Category Code (13)	4
Information Designation Character (13)	12
Record Category Code (14)	4
Information Designation Character (14)	13
Record Category Code (15)	4
Information Designation Character (15)	14
Type of Transaction 1.04 (tot)	DOC
Transaction Date 1.05 (dat)	20020405
Print Agency ORI 1.07 (dai)	MS0000000
Arrest/Applicant/DOC Agency ORI 1.08 (ori)	MS0000000

	Value
Transaction Control No 1.09 (tcn)	Is000000-20150315-9999
Native Scanning Res. 1.11 (nsr)	19.69
Nominal Transmitting Res. 1.12 (ntr)	19.69
Domain Version 1.13	
Domain Name	MCHS
Domain Version Number	2020-10-07 14:09:04 CDT
Type 2 Record:	
Record Header 2.001 (len)	367 (Calculated)
Information Designation Character 2.002 (idc)	1
Social Security # 2.016	123456789
Miscellaneous Id # 2.017	-
Misc Id # Type (0)	Natl Agency Nr
Misc Id # Value (0)	12-X45
Misc Id # Type (1)	Passport Nr
Misc Id # Value (1)	1234567-007
Name 2.018	-
Last Name (0)	BOND
First Name (0)	JAMES
Middle Name (0)	ALBERT
Name Suffix (0)	
Place of Birth 2.020	YY
Country of Citizenship 2.021	EN
Date of Birth 2.022	19550315 19520513

	Value
Sex/Gender 2.024	Male
Race 2.025	White
Height 2.027	601
Weight 2.029	180
Eye Color 2.031	BLU
Hair Color 2.032	BRO
Palm Prints Available 2.035	No
Photo Available 2.036	Yes
Date Printed 2.038	20020405
Caution Comments 2.056	Carries a Walther PPK
Image Capture Equipment 2.067	–
Equipment Make	Scanner Maker
Equipment Model	9000
Equipment Serial #	00001
Driver's License 2.703	–
Driver's License State	MS
Driver's License #	111-333-666
DOC Number 2.709	DOC222222
Type 4 Records:	14 records with IDC values from 1 to 14
Record Header (len)	19
Information Designation Character (idc)	1 through 14
Impression Type (imp)	1 for finger positions 1-10; 0 for finger positions 11-14

	<i>Value</i>
Finger Position (fgp)	1 through 14 in the first position followed by 5 bytes of -1
Image Scanning Resolution (isr)	1
Horizontal Line Length (hll)	700 for finger positions 1-10 and 13-14; 500 for finger positions 11-12
Vertical Line Length (vll)	700
Compression Algorithm (gca)	1
Image Data (data)	<a one byte image with a value of 0>

18.3.2 DOC Non-Binary Field Format

Example: DOC Non-Binary Field Format

Type 1 record:

```

1.01:194<GS>
1.02:0510<GS>
1.03:1<US>15<RS>2<US>0<RS>4<US>1<RS>4<US>2<RS>4<US>3<RS>4<US>4<RS>
      4<US>5<RS>4<US>6<RS>4<US>7<RS>4<US>8<RS>4<US>9<RS>4<US>10<RS>
      4<US>11<RS>4<US>12<RS>4<US>13<RS>4<US>14<GS>
1.04:DOC<GS>
1.05:20020405<GS>
1.07:MS00000000<GS>
1.08:MS00000000<GS>
1.09:ls000000-20150315-9999<GS>
1.11:19.69<GS>
1.12:19.69<GS>
1.13:MCHS<US>2020-10-07 14:09:04 CDT<FS>

```

Type 2 record:

```

2.001:367<GS>
2.002:0<GS>
2.009:02-123456<GS>
2.016:123456789<GS>
2.017:Nat'l Agency Nr<US>12-X45<RS>Passport Nr<US>1234567-007<GS>
2.018:BOND<US>JAMES<US>ALBERT<US><GS>
2.020:YY<GS>
2.021:EN<GS>
2.022:19550315<RS>19520513<GS>
2.024:Male<GS>
2.025:White<GS>
2.027:601<GS>
2.029:180<GS>
2.031:BLU<GS>
2.032:BRO<GS>

```

```

2.035:No<GS>
2.036:Yes<GS>
2.038:20020405<GS>
2.056:Carries a Walther PPK<GS>
2.067:LiveScan Maker<RS>9000<RS>00001<GS>
2.703:MS<US>111-333-666<GS>
2.709:DOC222222<FS>

```

18.3.3 DOC MIME Email Message Format

Example: DOC MIME Email Message Format

From ls000000@mscjis.dps.ms.gov Tue Apr 15 11:27:01 2003

... ..

Date: Tue, 15 Apr 2003 11:27:01 -0400 (EDT)

Message-Id: <201409011024.NAA20055@mscjis.dps.ms.gov>

... ..

From: Livescan <ls000000@mscjis.dps.ms.gov>

To: <controller@mscjis.dps.ms.gov>

Subject: DOC; DOC222222; BOND, JAMES; 19550315; L

... ..

Mime-Version: 1.0

Content-Type: application/octet-stream

Content-Transfer-Encoding: base64

```

MS4wMT0xOTQdMS4wMjowNTAyHTEuMDM6MR8xNR4yHzAeNB8xHjQfMh40HzMeNB80HjQfNR40HzYe
NB83HjQfOB40HzkeNB8xMB40HzExHjQfMTIeNB8xMx40HzE0HTEuMDQ6RE9DHTeUeMDU6MjAwMjA0
MDUdMS4wNzpnUzAwMDAwMDAdMS4wODpNUzAwMDAwMDAdMS4wOTpDRVJULWxzMDAwMDAwLURPQy0x
HTEuMTE6MTkuNjkdMS4xMjoxOS42ORwyLjAwMT0zNjcdMi4wMDI6MB0yLjAwOTowMi0xMjM0NTYd
Mi4wMTY6MTIzNDU2Nzg4HTIuMDE30k5hdGwgQWdlbmN5IE5yHzEyLVg0NR5QYXNzcG9ydCB0ch8x
MjM0NTY3LTAwNj0yLjAxODpCT05EH0pBTUVTH0FMQkVSVB8dMi4wMjA6WVkdMi4wMjE6RU4dMi4w
MjI6MTk1NTAzMTUeMTk1MjAzMTM0dMi4wMjQ6TWfsZR0yLjAyNTpXaGl0ZR0yLjAyNzo2MDEdMi4w
Mjk6MTgwHTIuMDMxOkJsdWUdMi4wMzI6QnJvd24dMi4wMzU6Tm8dMi4wMzY6WVZHTIuMDM40jIw
MDIwNDA1HTIuMDU20kNhcNjZXMgYSBXYWx0aGVyIFBQSc0yLjA2NzpnMhXZlU2Nhb1BNYWtlch45
MDAwHjAwMDAxHTIuNzAzOk1THzExMS0zMzMtNjY2HTIuNzA5OkRPQy0yMjIyMjIcAAAAEwEBAT8/
Pz8/AQI/Aj8BAAAAABMCAQI/Pz8/PwECPwI/AQAAAAATAwEDPz8/Pz8BAj8CPwEAAAAAEwQBBD8/
Pz8/AQI/Aj8BAAAAABMFAQU/Pz8/PwECPwI/AQAAAAATBgEGPz8/Pz8BAj8CPwEAAAAAEwcBBz8/
Pz8/AQI/Aj8BAAAAABMIAQg/Pz8/PwECPwI/AQAAAAATCQEJPz8/Pz8BAj8CPwEAAAAAEwoBCj8/
Pz8/AQI/Aj8BAAAAABMLAAs/Pz8/PwEBPwM/AQAAAAATDAAMPz8/Pz8BAT8DPwEAAAAAEw0ADT8/
Pz8/AQZAAZ8BAAAAABMOAA4/Pz8/PwEGQAM/AQAxMC4wMDE6MTU3HTEwLjAwMzpnGQUHFHTEwLjAw
NDpNU0NFU1Q0HTEwLjAwNT0yMDAyMDQwNR0xMC4wMDY6MR0xMC4wMDc6MR0xMC4wMDg6MB0xMC4w
MDk6MR0xMC4wMTA6MR0xMC4wMTE6S1BFR0IdMTAuMDEyO1lDQx0xMC4wMjA6R0xMC4wMjI6R0xB
U1NFUx4dMTAuOTk50lgc

```

19.0 APPENDIX H - SAMPLE TYPE 10 AND TYPE 15 RECORDS

This appendix contains examples of Type 10 and Type 15 records. The purpose of the appendix is as an aid to a scanning station vendor in determining whether the records are being properly formatted in accordance with [Appendix A](#) and [Appendix B](#).

19.1 H.1 TYPE 10 FACIAL IMAGE RECORDS

A sample of a Type 10 Facial Record is shown in this appendix. Appendix H.1.1 lists the contents of the Type 10 records. Appendix H.1.2 shows the non-binary fields of the records defined in H.1.1 in NIST-2011 format, including the record separators.

Field n.01Record Header is calculated by the scanning station software. It is the length of the record, including field n.01, in bytes.

"(no data)" indicates that no data is in the subfield and is therefore null.

19.1.1 Type 10 Record Field Contents

Facial Record:

	<i>Value</i>
Record Header 10.001 (len)	773681 (Calculated)
Information Designation Character (IDC) 10.002 (idc)	16
Image Type 10.003 (imt)	FACE
Source Agency ORI 10.004 (src)	MS00000000
Photo Capture Date 10.005 (phd)	20230131
Horizontal Line Length 10.006 (hll)	768
Vertical Line Length 10.007 (vll)	1024
Scale Units 10.008 (slc)	1
Transmitted Horizontal Pixel Scale 10.009 (thps)	1
Transmitted Vertical Pixel Scale 10.010 (tvps)	1
Compression Algorithm 10.011 (cga)	JP2L

	<i>Value</i>
Color Space 10.012 (csp)	SRGB
Subject Acquisition Profile 10.013 (sap)	40
Scanned Horizontal Pixel Scale 10.016 (shps)	1
Scanned Vertical Pixel Scale 10.017 (svps)	1
Subject Pose 10.020 (pos)	F
Photo Acquisition Source 10.023 (pas)	–
Photo Attribute Code (pac)	DIGITAL CAMERA
Vendor-Specific Description (vsd)	
Subject Facial Description 10.026 (sxs)	SQUINTING
Subject Eye Color 10.027 (sec)	GRN
Subject Hair Color 10.028 (shc)	BLK
Type-10 Reference Number 10.039 (T10)	2
Body Part Image 10.999 (data)	<image data>

19.1.2 Type 10 Record Non-Binary Field Format

Example: Type 10 Record Non-Binary Field Format

Type 10 Facial Record:

```

10.001:773681<GS>
10.002:16<GS>
10.003:FACE<GS>
10.004:MS00000000<GS>
10.005:20230131<GS>
10.006:768<GS>
10.007:1024<GS>
10.008:1<GS>

```

```

10.009:1<GS>
10.010:1<GS>
10.011:JP2L<GS>
10.012:SRGB<GS>
10.013:40<GS>
10.016:1<GS>
10.017:1<GS>
10.020:F<GS>
10.023:DIGITAL CAMERA<GS>
10.026:SQUINTING<GS>
10.027:GRN<GS>
10.028:BLK<GS>
10.999:<image data>

```

19.2 H.2 TYPE 15 PALM PRINT IMAGE RECORD

A sample of a Type 15 Palm Print record is shown in this appendix. Appendix H.2.1 lists the contents of the Type 15 records. Appendix H.2.2 shows the non-binary fields of the records defined in H.2.1 in NIST-2011 format, including the record separators.

Field n.01Record Header is calculated by the scanning station software. It is the length of the record, including field n.01, in bytes.

"(no data)" indicates that no data is in the subfield and is therefore null.

19.2.1 Type 15 Record Field Contents

	<i>Value</i>
RecordHeader 15.001 (len)	123096 (Calculated)
Information Designation Character (IDC) 15.002 (idc)	18
Impression Type 15.003 (imp)	10
Source Agency 15.004 (src)	MS00000000
Palm Print Capture Date 15.005 (pcd)	20110414
Horizontal Line length 15.006 (hll)	900
Vertical Line Length 15.007 (vll)	1112

	Value
Scale Units 15.008 (slc)	1
Transmitted Horizontal Pixel Scale 15.009 (thps)	1
Transmitted Vertical Pixel Scale 15.010 (tvps)	1
Compression Algorithm 15.011 (cga)	WSQ20
Bits Per Pixel 15.012 (bpx)	8
Friction Ridge Generalized Position 15.013 (fgp)	21
Scanned Horizontal Pixel Scale 15.016 (shps)	1
Scanned Vertical Pixel Scale 15.017 (svps)	1
Amputated or Bandaged 15.018 (amp)	–
Friction Ridge Amputated or Bandaged Position (frap)	21
Amputated or Bandaged Code (abc)	XX
Comment 15.020 (com)	Right Palm Comment
Palm Print Quality Metric 15.024 (pqm)	–
Friction Ridge Metric Position (frmp)	21
Quality Value (qvu)	150
Algorithm Vendor Identification (qav)	B1B1
Algorithm Product Identification (qap)	237
Device Monitoring Mode 15.030 (dmm)	CONTROLLED
Annotation Information 15.902 (ann)	–
Greenwich Mean Time (gmt)	20111224134002Z
Processing Algorithm Name Version (nav)	Algorithm XYZ
Algorithm Owner (own)	ABC Corp.

	Value
Process Description (pro)	A description of the algorithm
Device Unique Identifier 15.903 (dui)	P123456789012
Make Model Serial Number 15.904 (mms)	–
Make (mak)	Acme
Model (mod)	P-37
Serial Number (ser)	123-4444
Source Agency Name 10.993 (san)	Print Agency Name
Hash 15.996 (has)	<calculated>
Geographic Sample Acquisition Location 15.998 (geo)	–
Universal Time Entry (ute)	20111224102315Z
Latitude Degree Value (ltd)	75
Latitude Minute Value (ltm)	21.4
Latitude Second Value (lts)	<null>
Longitude Degree Value (lgd)	60
Longitude Minute Value (lgm)	22
Longitude Second Value (lgs)	.5
Elevation (ele)	-200.15
Geodetic Datum Code (gdc)	AIRY
Geographic Coordinate Universal Traverse Mercator Zone (gcm)	60D
Geographic Coordinate Universal Traverse Mercator Easting (gce)	20019
Geographic Coordinate Universal Traverse Mercator Northing (gcn)	114236
Geographic Reference Text (grt)	Hollywood and Vine
Geographic Coordinate Other System Identifier (osi)	USNG
Geographic Coordinate Other System Value (ocv)	A value from the Other System
Palm Print Image 15.999 (data)	<image data>

19.2.2 Type 15 Record Non-Binary Field Format

Example: Type 15 Record Non-Binary Field Format

Type 15 Record:

```
15.001:123096<GS>
15.002:18<GS>
15.003:10<GS>
15.004:MS00000000<GS>
15.005:20110414<GS>
15.006:900<GS>
15.007:1112<GS>
15.008:0<GS>
15.009:1<GS>
15.010:1<GS>
15.011:WSQ20<GS>
15.012:8<GS>
15.013:21<GS>
15.016:1<GS>
15.017:1<GS>
15.020:Right Palm Comment<GS>
15.024:20<US>150<US>B1B1<US>237<GS>
15.030:CONTROLLED<GS>
15.999:<image data>
```

20.0 APPENDIX I - CARD SAMPLES

20.1 I.1 MISSISSIPPI STATE ARREST CARD

STATE OF MISSISSIPPI FINGERPRINT CARD				ARREST TRACKING NUMBER 0020042485				
1. LAST NAME, FIRST NAME, MIDDLE NAME, SUFFIX				2. SOCIAL SECURITY NUMBER		3. DRIVERS LICENSE NUMBER		
4. SIGNATURE OF PERSON FINGERPRINTED				5. AGENCY CASE NUMBER		6. SID NUMBER		
7. ALIASES, MAIDEN		8. ARREST TYPE ADULT <input type="checkbox"/> JUVENILE TREAT AS ADULT <input type="checkbox"/>		9. ARRESTING AGENCY ORI, NAME, ADDRESS				
10. FBI NUMBER	11. DATE OF ARREST (MM DD YYYY)	12. DATE OF BIRTH (MM DD YYYY)	13. SEX	14. RACE	15. HEIGHT	16. WEIGHT	17. EYES	18. HAIR
19. SCARS, MARKS, TATTOOS, AND AMPUTATIONS (INCLUDE TATTOO DESCRIPTION)								
20. MISCELLANEOUS NUMBERS			21. RESIDENCE (COMPLETE ADDRESS)					
1. R. THUMB		2. R. INDEX		3. R. MIDDLE		4. R. RING		5. R. LITTLE
6. L. THUMB		7. L. INDEX		8. L. MIDDLE		9. L. RING		10. L. LITTLE
LEFT FOUR FINGERS TAKEN SIMULTANEOUSLY				L. THUMB	R. THUMB	RIGHT FOUR FINGERS TAKEN SIMULTANEOUSLY		

MISSISSIPPI CRIMINAL HISTORY SYSTEM

		115. RECEIVED AT STATE BUREAU		
116. BOOKED BY (ORI, AGENCY NAME)		117. OFFICIAL TAKING FINGERPRINTS (NAME AND NUMBER)		
118. PLACE OF BIRTH (STATE OR COUNTRY)		119. COUNTRY OF CITIZENSHIP		
120. EMPLOYER AND OCCUPATION				
121. PHOTO TAKEN? Y / N		122. PALMPRINTS TAKEN? Y / N		123. DNA SAMPLE TAKEN? Y / N
124. STATE STATUTE	125. CHARGE DESCRIPTION	126. SEVERITY	127. COUNTS	128. DATE OF OFFENSE (MM DD YYYY)
129. STATE STATUTE	130. CHARGE DESCRIPTION	131. SEVERITY	132. COUNTS	133. DATE OF OFFENSE (MM DD YYYY)
134. STATE STATUTE	135. CHARGE DESCRIPTION	136. SEVERITY	137. COUNTS	138. DATE OF OFFENSE (MM DD YYYY)
139. STATE STATUTE	140. CHARGE DESCRIPTION	141. SEVERITY	142. COUNTS	143. DATE OF OFFENSE (MM DD YYYY)
144. ADDITIONAL INFORMATION / BASIS FOR CAUTION				

20.2 I.2 FBI APPLICANT CARD

APPLICANT		LEAVE BLANK		TYPE OR PRINT ALL INFORMATION IN BLACK		FBI		LEAVE BLANK	
SIGNATURE OF PERSON FINGERPRINTED		LAST NAME <u>NAM</u>		FIRST NAME		MIDDLE NAME		DATE OF BIRTH <u>DOB</u>	
②		ALIASES <u>AKA</u>		⑧		⑨		⑩	
RESIDENCE OF PERSON FINGERPRINTED		CITIZENSHIP <u>CTZ</u>		⑪		SEX <u>12</u>		RACE <u>13</u>	
③		YOUR NO. <u>OCA</u>		⑲		HGT <u>14</u>		WGT <u>15</u>	
DATE		FBI NO. <u>FBI</u>		⑲		EYES <u>16</u>		HAIR <u>17</u>	
④		ARMED FORCES NO. <u>MNU</u>		⑳		⑫		⑬	
SIGNATURE OF OFFICIAL TAKING FINGERPRINTS		SOCIAL SECURITY NO. <u>SOC</u>		㉑		⑭		⑮	
⑤		MISCELLANEOUS NO. <u>MNU</u>		㉒		⑯		⑰	
EMPLOYER AND ADDRESS		⑥		⑦		⑱		⑲	
REASON FINGERPRINTED		⑦		⑧		⑩		⑪	
⑦		⑧		⑩		⑪		⑫	
⑧		⑩		⑪		⑫		⑬	
⑩		⑪		⑫		⑬		⑭	
⑫		⑬		⑭		⑮		⑯	
⑬		⑭		⑮		⑯		⑰	
⑰		⑱		㉑		㉒		㉓	
⑱		㉑		㉒		㉓		㉔	
㉑		㉒		㉓		㉔		㉕	
㉒		㉓		㉔		㉕		㉖	
㉓		㉔		㉕		㉖		㉗	
㉔		㉕		㉖		㉗		㉘	
㉕		㉖		㉗		㉘		㉙	
㉖		㉗		㉘		㉙		㉚	
㉗		㉘		㉙		㉚		㉛	
㉘		㉙		㉚		㉛		㉜	
㉙		㉚		㉛		㉜		㉝	
㉚		㉛		㉜		㉝		㉞	
㉛		㉜		㉝		㉞		㉟	
㉜		㉝		㉞		㉟		㊀	
㉝		㉞		㉟		㊀		㊁	
㉞		㉟		㊀		㊁		㊂	
㉟		㊀		㊁		㊂		㊃	
㊀		㊁		㊂		㊃		㊄	
㊁		㊂		㊃		㊄		㊅	
㊂		㊃		㊄		㊅		㊆	
㊃		㊄		㊅		㊆		㊇	
㊄		㊅		㊆		㊇		㊈	
㊅		㊆		㊇		㊈		㊉	
㊆		㊇		㊈		㊉		㊊	
㊇		㊈		㊉		㊊		㊋	
㊈		㊉		㊊		㊋		㊌	
㊉		㊊		㊋		㊌		㊍	
㊊		㊋		㊌		㊍		㊎	
㊋		㊌		㊍		㊎		㊏	
㊌		㊍		㊎		㊏		㊐	
㊍		㊎		㊏		㊐		㊑	
㊎		㊏		㊐		㊑		㊒	
㊏		㊐		㊑		㊒		㊓	
㊐		㊑		㊒		㊓		㊔	
㊑		㊒		㊓		㊔		㊕	
㊒		㊓		㊔		㊕		㊖	
㊓		㊔		㊕		㊖		㊗	
㊔		㊕		㊖		㊗		㊘	
㊕		㊖		㊗		㊘		㊙	
㊖		㊗		㊘		㊙		㊚	
㊗		㊘		㊙		㊚		㊛	
㊘		㊙		㊚		㊛		㊜	
㊙		㊚		㊛		㊜		㊝	
㊚		㊛		㊜		㊝		㊞	
㊛		㊜		㊝		㊞		㊟	
㊜		㊝		㊞		㊟		㊠	
㊝		㊞		㊟		㊠		㊡	
㊞		㊟		㊠		㊡		㊢	
㊟		㊠		㊡		㊢		㊣	
㊠		㊡		㊢		㊣		㊤	
㊡		㊢		㊣		㊤		㊥	
㊢		㊣		㊤		㊥		㊦	
㊣		㊤		㊥		㊦		㊧	
㊤		㊥		㊦		㊧		㊨	
㊥		㊦		㊧		㊨		㊩	
㊦		㊧		㊨		㊩		㊪	
㊧		㊨		㊩		㊪		㊫	
㊨		㊩		㊪		㊫		㊬	
㊩		㊪		㊫		㊬		㊭	
㊪		㊫		㊬		㊭		㊮	
㊫		㊬		㊭		㊮		㊯	
㊬		㊭		㊮		㊯		㊰	
㊭		㊮		㊯		㊰		㊱	
㊮		㊯		㊰		㊱		㊲	
㊯		㊰		㊱		㊲		㊳	
㊰		㊱		㊲		㊳		㊴	
㊱		㊲		㊳		㊴		㊵	
㊲		㊳		㊴		㊵		㊶	
㊳		㊴		㊵		㊶		㊷	
㊴		㊵		㊶		㊷		㊸	
㊵		㊶		㊷		㊸		㊹	
㊶		㊷		㊸		㊹		㊺	
㊷		㊸		㊹		㊺		㊻	
㊸		㊹		㊺		㊻		㊼	
㊹		㊺		㊻		㊼		㊽	
㊺		㊻		㊼		㊽		㊾	
㊻		㊼							

IDENTIFICATION NO.	LAST NAME	FIRST NAME	MIDDLE NAME	SID NUMBER	FBI NUMBER
DATE PRINTED	SIGNATURE OF OFFICIAL TAKING PRINTS		ID NUMBER	CONTRIBUTOR (OR)	
WRITER'S PALM IMPRESSION				INDEX FINGER	

FEDERAL BUREAU OF INVESTIGATION, UNITED STATES DEPARTMENT OF JUSTICE
1000 CUSTER HOLLOW ROAD, CLARKSBURG, WEST VIRGINIA 26306

THUMB	INDEX	MIDDLE	RING	LITTLE

21.0 APPENDIX J - INSTALLATION

21.1 J.1 INSTALLATION CHECKLIST

The following checklist summarizes the items that will need to be coordinated between the CIC, the scanning station vendor, and the local agency or MDOC after certification and prior to deploying a scanning station.

Item	Responsible Party	Action
1	Vendor	<p>Vendor: Must send a notice to the CIC not less than 10 days prior to any installation at a customer site.</p> <p>If requested by the CIC, also provide a schematic of the system to be installed with an explanation detailing any changes from the configuration used by the vendor in the certification process. The CIC will review the installed configuration. Refer to Section 5.0 regarding configuration options.</p> <p>Specify the following:</p> <ul style="list-style-type: none">• type(s) of scanning station(s)• type(s) of scanners (tenprint or palm print and card scanner or live scanner)• make and model of scanners• concentrator (if applicable)• printer(s)• camera(s)• connections to other systems• physical location(s)
2	Scanning Station Vendor, Local Agency, and CIC	<p>CIC: If schematic was requested, approve schematic of the system to be installed. If there are any changes from the certified configuration, the local agency site may not operate in a live mode until the CIC approves the configuration.</p>
3	Scanning Station Vendor and CIC	<p>All parties: Determine the agency type/ types of submissions the station will be allowed to submit (refer to Section 4.1).</p> <p>All parties: Determine whether livescan will be allowed to submit Type 15 palm print records.</p> <p>CIC: Compare agency type/types of submission with those that were certified. If applicable, verify that palm print submission was certified. Compare make/model of scanners with those that were certified.</p>
4	Scanning Station Vendor, Local Agency, and CIC	<p>All parties: Ensure that all security requirements are met (see Section 11.)</p>

Item	Responsible Party	Action
5	Scanning Station Vendor, Local Agency, and CIC	<p>All parties: Determine the correct values for all fields with a possible source of 'hardcoded - agency-specific' or 'pre-set default' to ensure that they are valid and correct. This includes:</p> <ul style="list-style-type: none"> • 1.07 Print Agency ORI (hardcoded - agency-specific) • 1.08 Applicant Agency ORI (pre-set default) • 2.702 Arrest Agency ORI (pre-set default) <p>(Requirements for these fields are in Appendix A.) Determine the correct standard text for:</p> <ul style="list-style-type: none"> • 2.067 Equipment Make and Model for each scanner <p>Determine the response routing requirements.</p>
6	CIC and Scanning Station Vendor	<p>CIC: Assign an IP address. CIC: Assign a Station Id. Scanning station ids must use the following naming conventions. The first two characters must be selected from the following: ls - local agency livescan station or concentrator lc - local agency cardscan station cs - CIC livescan station cc - CIC cardscan station Vendor: Configure scanning station. Use the station id in the Transaction Control Number, as the from_station in the email From line, and to log into the station's POP3 mail account.</p>
7	CIC	<ul style="list-style-type: none"> • Set up scanning station record. • Set up agency record including print routing flags. • Set up POP3 mail file for the scanning station (includes securely sharing generated password for the scanning station with vendor). • For a livescan, set up ATN blocks. • Update authorization tables.
8	CIC and Scanning Station Vendor	<p>CIC: Send Edit Table Download and ATN Block messages to the new stations. Vendor: Ensure that Edit Table Download and ATN Block messages are received and properly processed.</p>

Item	Responsible Party	Action
9	Scanning Station Vendor in coordination with CIC	<p>Vendor: Submit test transactions for each type of transaction that will be supported by this scanning station. The CIC will provide instructions on how to submit test transactions.</p> <p>CIC: Verify that value in field 1.02 Format Version Number is '0510'.</p> <p>CIC: Review test transactions. Verify that validations that should be detected by the scanning station are not appearing in Reject Notices.</p> <p>CIC: Notify the vendor of transaction format problems that are in addition to those that appear on the Reject Notice. Such as compression ratio.</p> <p>CIC: Verify with vendor that Equipment Serial number is correct.</p>
10	CIC	Approve installed system before scanning station operates in a production mode.
11	Scanning Station Vendor, Local Agency, and CIC	If palm prints are to be submitted, monitor live transactions.

21.2 J.2 INSTALLATION PROCEDURES

On installation day:

- On-site setup, testing, and training are highly recommended.
- There is a **45-minute window** to connect, troubleshoot and submit test transactions from the scheduled start time. If there are issues during this time frame, Livescan installation will be rescheduled for a later date.
- Installations will occur on **Tuesdays through Thursdays**.
- Remember that there will be **one installation per day for all vendors**.
- On the day of installation, the password for the mailbox will be generated and sent to the designated vendor email address.
- Once the encrypted password is used to unlock the mailbox, Edit Tables & ATN's (if Law Enforcement site) will be downloaded to the livescan.
- During installation, submit test transactions for each type of transaction that will be submitted from the livescan.
- Test transactions must be done from the livescan device, not from a previous transaction.
- During installation, all errors in test transactions need to be resolved before live transactions can be submitted.
- Training users on the livescan system during installation must also be completed before live transactions can be submitted.

The Mississippi Criminal Information Center has the right to make revisions to these procedures if needed.